

SUB 9007-AS

ACTIVE HIGH-POWER BASS MODULE



DESCRIPTION

The SUB 9007-AS is one of the most powerful 2x21" subwoofers in the field of live sound. Featuring two, high power, hyper-vented 21" neodymium woofers with 4.0" inside-outside voice coils, this cabinet deliver a serious amount of low frequencies. Powered by a 7200 W digital amplifier, the SUB 9007-AS can perform in the most demanding situations. The housing of the SUB 9007-AS match the RCF D-Line HDL 50 and HDL 20 array systems, enabling stacked systems matched a perfect combination.

MAIN APPLICATIONS

- Live sound
- Rental
- Portable PA, clubs, ballrooms, live theatre
- House of worship
- Club sound, DJs

MAIN FEATURES

- 7200 Watt Peak power - 3600 Watt RMS
- 143 dB max SPL
- 25 Hz - 120 Hz frequency response
- 2 x 21" Woofer
- DSP controlled Input section with selectable presets
- Delay control
- Integrated mechanics for multiple configurations with HDL50-A, DL20-A, HDL10-A
- RNet remote and control
- Baltic birch tour grade cabinet

ACOUSTICAL SPECIFICATIONS

Frequency response:	20 Hz - 400 Hz
Max SPL:	141 dB
Woofer:	2 x 21", 4.0" v.c.

INPUT/OUTPUT SECTION

Input signal (Impedance):	bal/unbal
Input/Output connector:	XRL
Input sensitivity:	+4 dBu

PROCESSOR SECTION

Protections:	Thermal - RMS
Limiters:	fast limiter
Controls:	Gain, EQ, Xover, Phase switch, Output Delay Settings, Cardioid

AMPLIFIER






Power supply:	7200 W Peak, 3600 W RMS
Low frequencies:	7200 W Peak, 3600 W RMS
Cooling:	Convection
Connection:	Powercon in/out

PHYSICAL

Height:	708 mm (27,9")
Width:	1188 mm (46,8")
Depth:	780 mm (30,90")
Weight:	96 kg (211.64 lbs)
Cabinet:	baltic birch plywood
Hardware:	Mounting points, 2 x M20
Handles:	8 side
Pole mount cap	yes
Colour:	Black



SUB 9007-AS

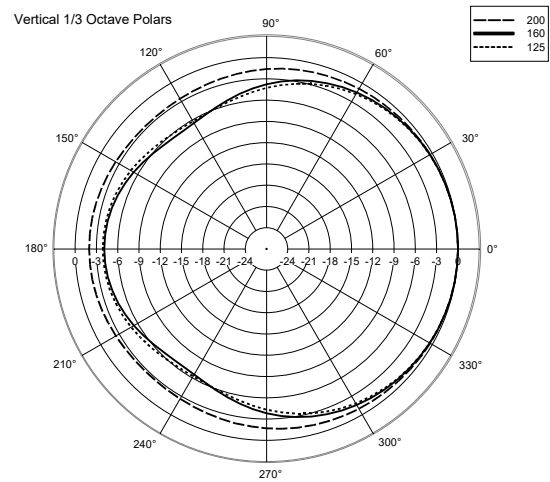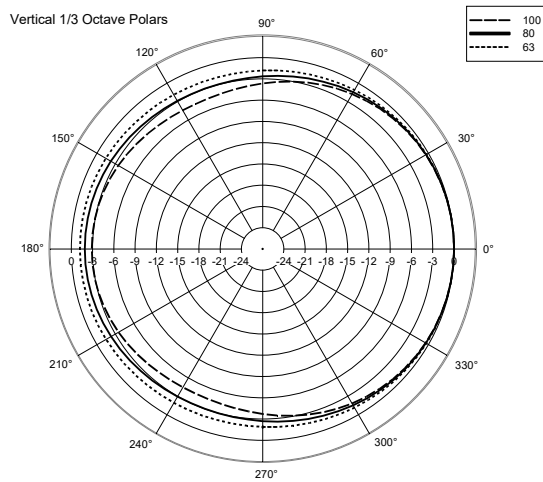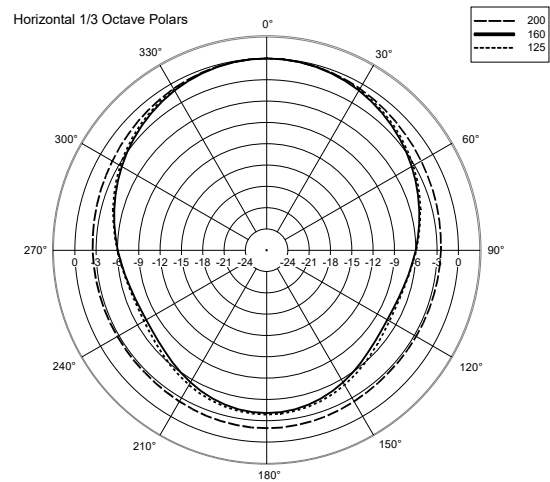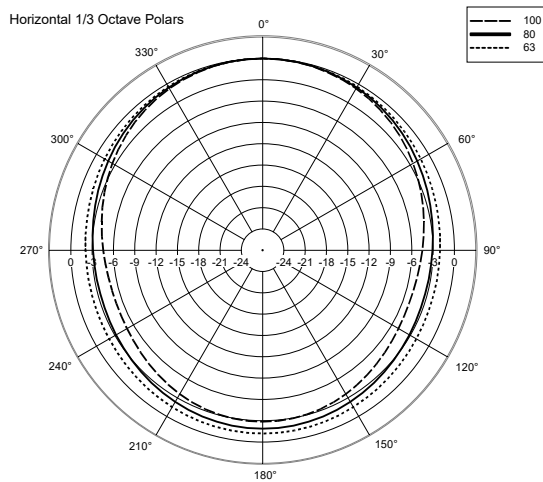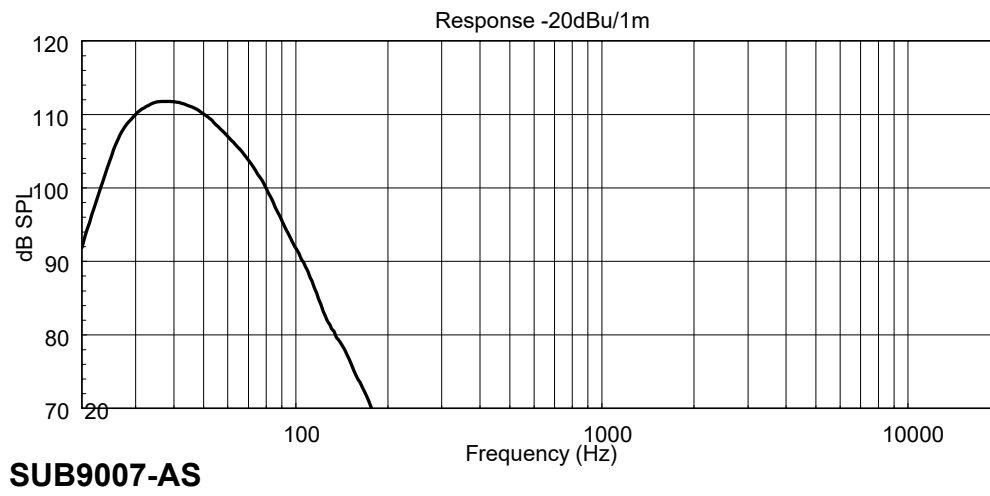

SUB 9007-AS

PART NUMBER

13000493

DIMENSIONS (All data are in mm)

