

MD 7600

DYNAMIC MICROPHONES

DESCRIPTION

Dynamic unidirectional microphone with a 3-pole XLR connection, equipped with internal anti-pop filter and ON/OFF switch with safety lock insert. MD 7600 can endure handling due to the optimum capsule suspension and it also works as professional microphone with excellent reproduction of speech and vocals.



FEATURES

- Supercardioid dynamic microphone
- Anti-pop filter
- ON/OFF switch with lock
- Minimum handling noise
- 5 metre balanced and screened cable with 3 pole XLR connectors included
- Mic. holder for stands and soft bag included

TECHNICAL SPECIFICATIONS**Microphone specifications**

Type:	Dynamic
Directivity:	Unidirectional
Frequency Response (-3dB):	60 Hz ÷ 16 kHz
Output impedance (ohm):	500.00 ohm

Connections

Connectors:	XLR
-------------	-----

Accessories

Cable included:	Yes
Cable length (m):	5

Standard compliance

CE marking:	Yes
-------------	-----

Physical specifications

Color:	Black
--------	-------

Size

Height:	180 mm / 7.09 inches
Diameter:	48 mm / 1.89 inches
Weight:	0.6 kg / 1.32 lbs

Shipping informations

Package Height:	242 mm / 9.53 inches
Package Width:	70 mm / 2.76 inches
Package Depth:	125 mm / 4.92 inches
Package Weight:	0.8 kg / 1.76 lbs


PART NUMBER

- **14115014**

MD 7600


EAN 8024530005689

DRAWINGS

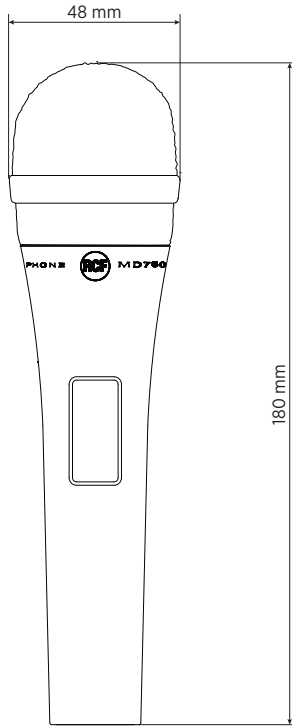


SCHEMATICS


MICROPHONE XLR PLUG:



BALANCED AND SHIELDED MICROPHONE CABLE WITH XLR CONNECTORS:

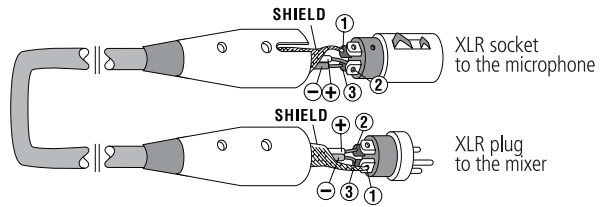

FREQUENCY RESPONSE

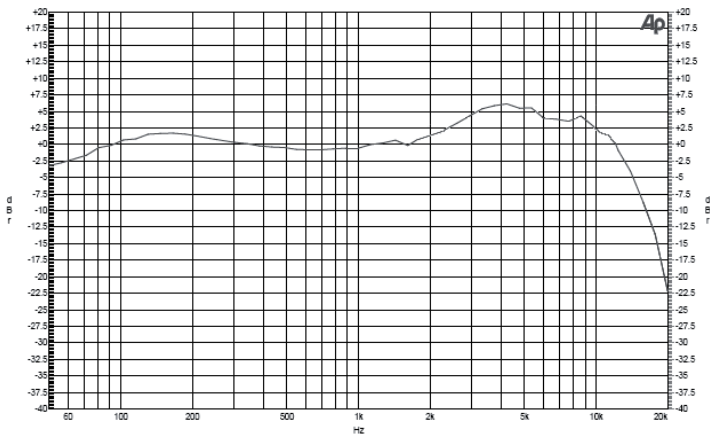

POLAR PATTERNS

