

MC 5054

UNIVERSAL HIGH QUALITY MICROPHONE

DESCRIPTION

MC 5054 is a condenser microphone with high quality capsule, mounted on a flexible arm 445 mm long, and to be installed on microphone support with XLR connector. It is powered with phantom from 9 V to 52 V and windshield polyurethane foam.



FEATURES

- Directional characteristics: uni-directional
- Element type: back Electret Condenser
- Frequency: 50 Hz - 18.000 Hz
- Impedance: 200
- Sensitivity: $-65 \text{ dB} \pm 3 \text{ dB}$ (0 dB = 1 V/microbar 1.000 Hz indicated by open circuit).
- Operating voltage: phantom power, 9V - 52V DC
- Accessories: windscreen

TECHNICAL SPECIFICATIONS**Microphone specifications**

Type:	Electret
Directivity:	Cardioid
Frequency Response (-3dB):	50 Hz ÷ 18 kHz
Output impedance (ohm):	200.00 ohm
Phantom power:	Yes
Phantom Power:	9 V DC - 52 V DC

Standard compliance

CE marking:	Yes
-------------	-----

Physical specifications

Cabinet/Case Material:	Metal
Color:	Black

Size

Height:	540 mm / 21.26 inches
Diameter:	21 mm / 0.83 inches

Shipping informations

Package Height:	55 mm / 2.17 inches
Package Width:	540 mm / 21.26 inches
Package Depth:	45 mm / 1.77 inches
Package Weight:	0.26 kg / 0.57 lbs


PART NUMBER

- **14115024**

MC 5054

EAN 8024530012007

DRAWINGS

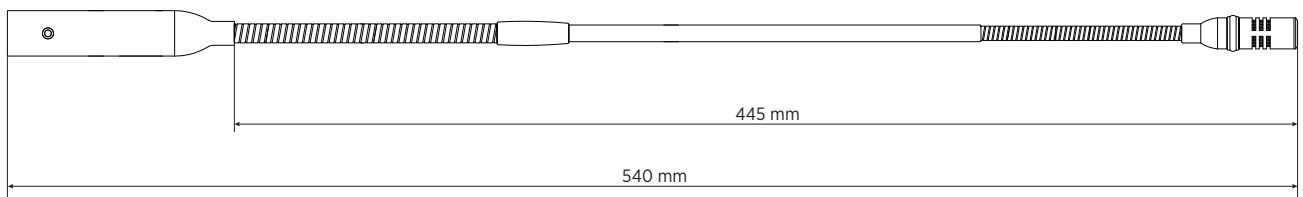

FREQUENCY RESPONSE

