


TTS 56-A

ACTIVE HIGH POWER SUBWOOFER

DESCRIPTION

The TTS56-A is a high power, high output active subwoofer system that sets a new standard in the touring sound reinforcement. The new 21" neodymium design represents the result of many years dedicated in pioneering new solutions for the transducers technology. The integration of the 6800 W, two channel digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency.

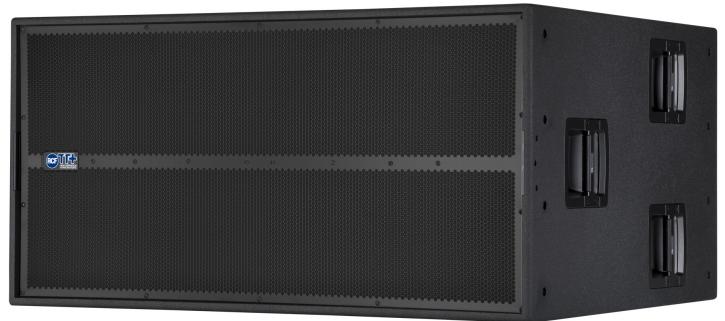

FEATURES

- 2 x 3400 W digital amplifiers
- 2 x 21" high power neodymium woofers
- 96 kHz, 32 bit DSP processing
- Remote monitoring and control
- Time delay alignment
- Cardioid preset for groups
- Tour grade cabinet
- RDNet on board
- Maximum output per size on market

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	30 Hz ÷ 100 Hz
	Max SPL @ 1m:	145 dB
Transducers	Woofers:	2 x 21" neo, 4.5" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR, RDNet Ethercon
	Output connectors:	XLR, RDNet Ethercon
	Input sensitivity:	-2 dBu/+10 dBu
Processor section	Hi-Pass Frequencies:	90 Hz
	Low-Pass Frequencies:	60 Hz
	Protections:	Thermal, Excurs., RMS
	Limiter:	Soft Limiter
	Controls:	DSP Controlled
	RDNet:	Yes
Power section	Total Power:	13600 W Peak, 6800 W RMS
	Low frequencies:	13600 W Peak, 6800 W RMS
	Cooling:	Convection/Forced
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Hardware:	2 x steel bar fork - lift transportation, 4 x 100 mm wheels
	Handles:	6 side
	Grille:	Steel
	Color:	Black
Size	Height:	590 mm / 23.23 inches
	Width:	1170 mm / 46.06 inches
	Depth:	988 mm / 38.9 inches
	Weight:	122.8 kg / 270.73 lbs
Shipping informations	Package Height:	1316 mm / 51.81 inches
	Package Width:	800 mm / 31.5 inches
	Package Depth:	1200 mm / 47.24 inches
	Package Weight:	178.2 kg / 392.86 lbs



PART NUMBER

- **13000190**
TTS 56-A
90-240V
EAN 8024530008611

