



BM 3022

PAGING MICROPHONE



Description Gooseneck microphone with hi-quality unidirectional electret capsule Direct connection to power amplifiers input through CAT5 cable Adjustable line output with RJ45 connector Switchable automatic gain control (AGC) Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain' Selectable mixing, interlocking or priority mode among devices When activating a microphone, the announcement can be preceded by a chime.

Features › Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain'




Part Number 14322013 BM 3022 Grey EAN 8024530007034



BM 3022

PAGING MICROPHONE

Line Art 2D

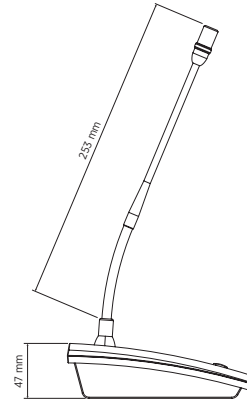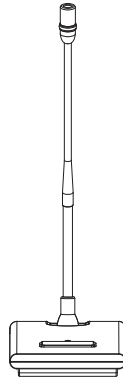

TECHNICAL SPECIFICATIONS

Microphone specifications

Type	Desktop paging microphone with electret capsule
Directivity	Cardioid
Sensitivity	-65 dB
Frequency Response (-3dB)	200 Hz ÷ 7 kHz
Output impedance (ohm)	130.00 ohm
Minimum load impedance (ohm)	470.00 ohm
Signal / Noise ratio @1kHz	82.00 dB
Total harmonic distortion @1 kHz	0.65 %

Console specifications

Console Type	Paging
Working with	DXT 3000
General call	Yes
Preamplified	Yes
LED indicators	Yes

Power requirement

Operating voltage	24.00V - Hz
Power consumption	2.80 mA

Connections

Connectors	RJ45
------------	------

Functionalities

Priority	Yes
VOX facility	Yes
Chime tone generator	Yes
Smart PTT	Yes
Automatic gain control	Yes

Accessories

Cable included	Yes
Cable length (m)	5

Standard compliance

Safety agency	CE compliant
---------------	--------------

Physical specifications

Cabinet/Case Material	Plastic
Color	Grey

Size

Height	48 mm / 1.89 inches
Width	100 mm / 3.94 inches
Depth	159 mm / 6.26 inches
Weight	0.74 kg / 1.63 lbs



BM 3022

PAGING MICROPHONE