



# BM 3022

TISCHSPRECHSTELLE



## Beschreibung

Gooseneck microphone with hi-quality unidirectional electret capsule Direct connection to power amplifiers input through CAT5 cable Adjustable line output with RJ45 connector Switchable automatic gain control (AGC) Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain' Selectable mixing, interlocking or priority mode among devices When activating a microphone, the announcement can be preceded by a chime.

## Funktionen

› Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain'

## Artikel-nummer

14322013 BM 3022

Grey

EAN 8024530007034

## Spezifikationen




Products are continually improved. All specifications are therefore subject to change without notice.



# BM 3022

## TISCHSPRECHSTELLE

Line Art 2D

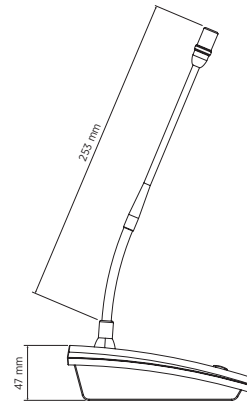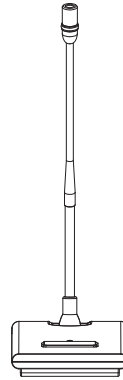

### SPEZIFIKATIONEN

#### Mikrofon-spezifikationen

Typ	Desktop paging microphone with electret capsule
Richtcharakteristik	Cardioid
Empfindlichkeit (dB)	-65 dB
Frequenzgang (-3dB)	200 Hz ÷ 7 kHz
Ausgangs-Impedanz (Ohm)	130.00 ohm
Minimale Anschlussimpedanz	470.00 ohm
Signal/Rausch Abstand @1kHz (dB)	82.00 dB
Klirrfaktor @ 1 kHz (%)	0.65 %

#### Technische daten der konsole

Typ:	Paging
kompatibel mit	DXT 3000
General call	Yes
Vorverstärker	Yes
LED Anzeige	Yes

#### Strombedarf

Betriebsspannung (V - Hz)	24.00V - Hz
Stromverbrauch (mA)	2.80 mA

#### Verbindungen

Verbinder	RJ45
-----------	------

#### Funktionen

Priorität	Yes
VOX facility	Yes
Signalton-Generator	Yes
Smart PTT	Yes
Automatische Gain Regelung	Yes

#### Zubehör

enthaltenes Kabel	Yes
Kabellänge (m)	5

#### Standardkonformität

Safety agency	CE compliant
---------------	--------------

#### Physikalische daten

Gehäuse Material	Plastic
Farbe	Grey

#### Größe

Höhe	48 mm / 1.89 inches
Breite	100 mm / 3.94 inches
Tiefe	159 mm / 6.26 inches
Gewicht	0.74 kg / 1.63 lbs



# BM 3022

TISCHSPRECHSTELLE