



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER



Description

NXL 14-A is the most compact active speaker in the professional NXL series. It features two 6" woofers in a symmetrical configuration and the new 1.75" Precision Transducers PKX driver loaded on a rotatable TRW waveguide, all powered by a 2,100W two-channel amplifier. Available in black or white finish, the NXL 14-A is designed to deliver definition, power, and portability in any live application. Perfect for vocal reproduction, ideal in compact live systems paired with SUB Series subwoofers, in immersive setups, or as a fill speaker.

Features

- › 128 dB max SPL
- › 2100W Class-D Bi-Amplification
- › 70-20000 Hz linear frequency range
- › 1.75" PKX / Neodymium Compression Driver
- › 2 x 6" High Power Neodymium Woofers
- › Rotatable 100° x 70° TRW Waveguide
- › FIRPHASE and Bass Motion Control

Part Number


13000888 NXL 14-A	220-240 V	Black - RAL 9005	EAN 8024530022006
13000891 NXL 14-A W	220-240 V	White - RAL 9003	EAN 8024530022013
13000892 NXL 14-A	100-120 V	Black - RAL 9005	EAN 8024530022204
13000893 NXL 14-A W	100-120 V	White - RAL 9003	EAN 8024530022211



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Line Art 2D

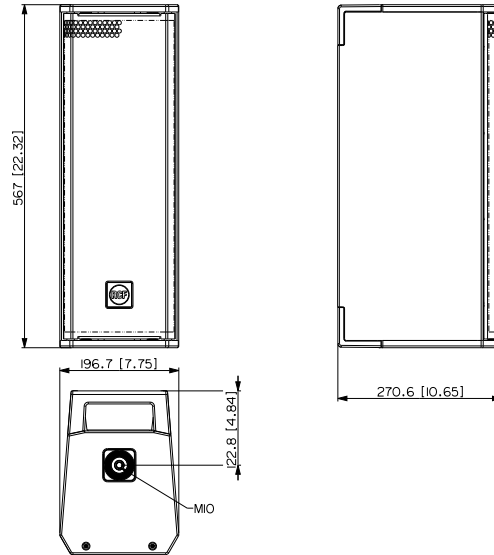

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	70 Hz ÷ 20000 Hz
	Max SPL @ 1m	128 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	2 x 6.0" neo, 2.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	Combo XLR/Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1200
	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Linear/Boost/Stage Presets, Volume.
Power section	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plywood
	Hardware	2X M10 TOP AND BOTTOM 2X PIN D.10
	Handles	2 TOP AND BOTTOM
	Pole mount/Cap	Quick-fit socket
	Grille	Steel
	Color	Black - RAL 9005, White - RAL 9003



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Size / Weight	Height	567 mm / 22.32 inches
	Width	197 mm / 7.76 inches
	Depth	270 mm / 10.63 inches
	Weight	12.8 kg / 28.22 lbs

Rigging / Mounting	ACCESSORIES		
	FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	HORIZONTAL BRACKETS		
	13360683 HBR60683	Black	EAN 8024530022518
	13360684 HBR60684	White	EAN 8024530022525
	13360681 VBR60681	Black	EAN 8024530022532
	13360682 VBR60682	White	EAN 8024530022549
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360678 PMK60678	Black	EAN 8024530022563
	13360679 PMK60679	White	EAN 8024530022570
	13360638 PM-KIT M20	White	EAN 8024530022303
	13360067 PM-KIT M20	Black	EAN 8024530014599
Protections			
BAGS			
13360685 CVR60685	Black	EAN 8024530022556	
Cables			
CABLES KIT			
13360102 AC XLR 3M3F		EAN 8024530006402	