

DU 100X

CEILING OR WALL SURFACE MOUNTED

DESCRIPTION

The compact and stylish DU 100X speaker can be installed on a wall or ceiling. Its compact white plastic body has a wide, coloured metal grill. It has a coaxial loudspeaker with up to 18,000 Hz line frequency and a 25-70-100V constant voltage transformer, with the possibility to preset the power during installation.



FEATURES

- It can be installed on walls and ceilings
- Body in white plastic
- Metallic protection grille.
- Elegant design and compact dimensions.
- Coaxial loudspeaker with a particularly linear frequency response up to 18.000 Hz.
- Line transformer for constant voltage systems at 25 V, 70 V, 100 V
- Power selection.



TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB):	100 Hz ÷ 18000 Hz
	Max SPL @ 1m:	103 dB
	Horizontal coverage angle:	195°
	Vertical coverage angle:	165°
	System Sensitivity:	93 dB
Power section	Power Handling:	10 W RMS
	Peak Power Handling:	40 W PEAK
	Recommended Amplifier:	20 W
Transducers	Dome Tweeter:	1.0"
	Woofer:	Coaxial 4.0"
Input/Output section	Input connectors:	Screw Terminals
	Output connectors:	Screw Terminals
	Constant Voltage Transformer:	70/100 V
	Power selection 1 (100 V):	10 W - 1000 ohm
	Power selection 2 (100 V):	5 W - 2000 ohm
	Power selection 3 (100 V):	2.5 W - 4000 ohm
	Power selection 4 (100 V):	1.2 W - 8333 ohm
Power selection 5 (100 V):	0.6 W - 16667 ohm	
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Plastic
	Grille:	Steel
	Color:	White - RAL 9003
Size	Height:	190 mm / 7.48 inches
	Width:	220 mm / 8.66 inches
	Depth:	87 mm / 3.43 inches
	Weight:	1.12 kg / 2.47 lbs
Shipping informations	Package Height:	105 mm / 4.13 inches
	Package Width:	240 mm / 9.45 inches
	Package Depth:	210 mm / 8.27 inches
	Package Weight:	1.36 kg / 3 lbs



PART NUMBER







- **13000105**

DU 100X







EAN 8024530005580

DRAWINGS

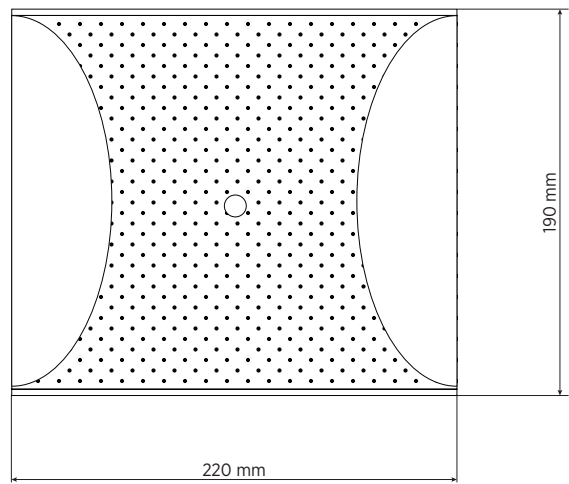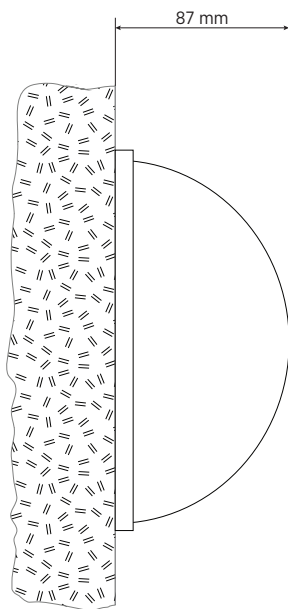

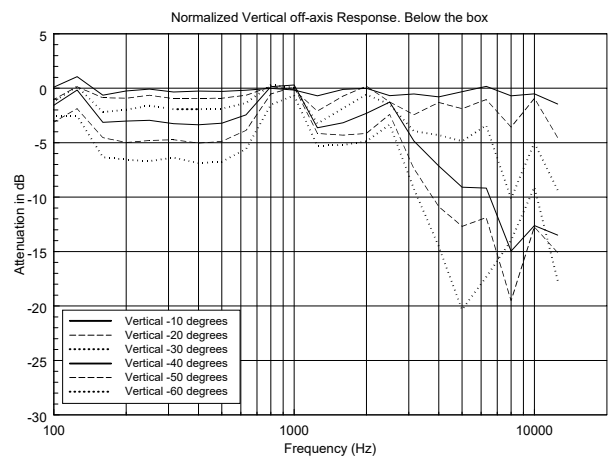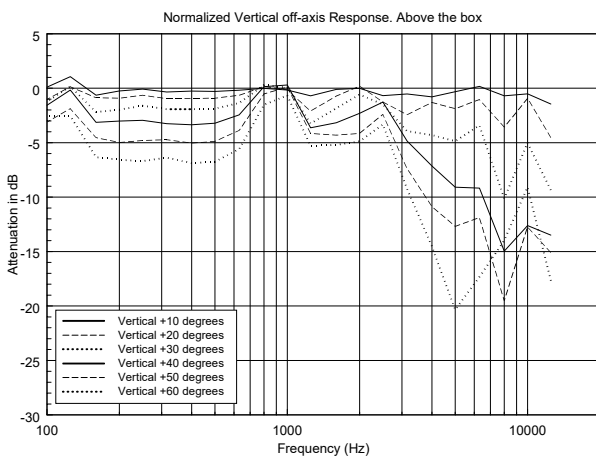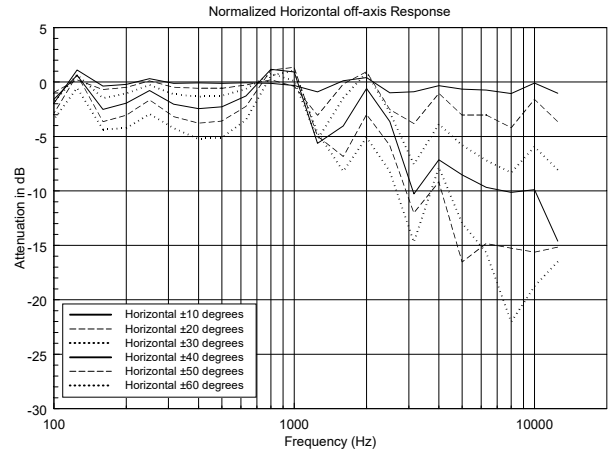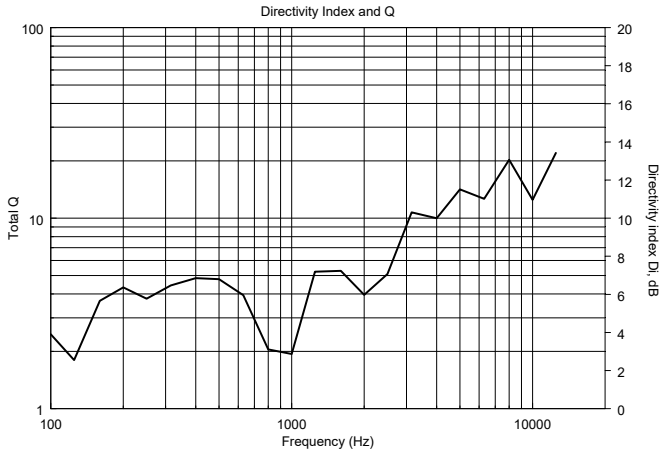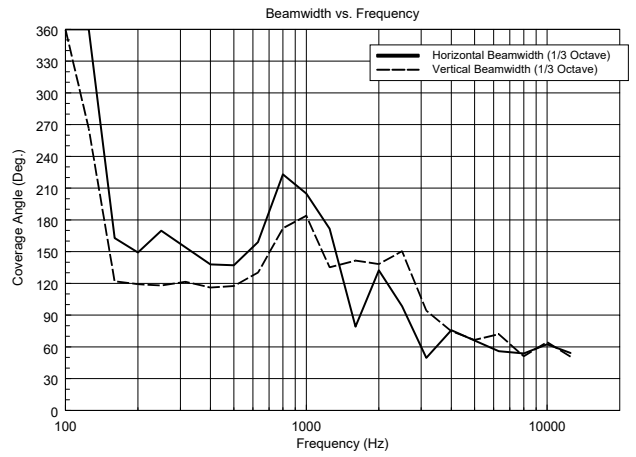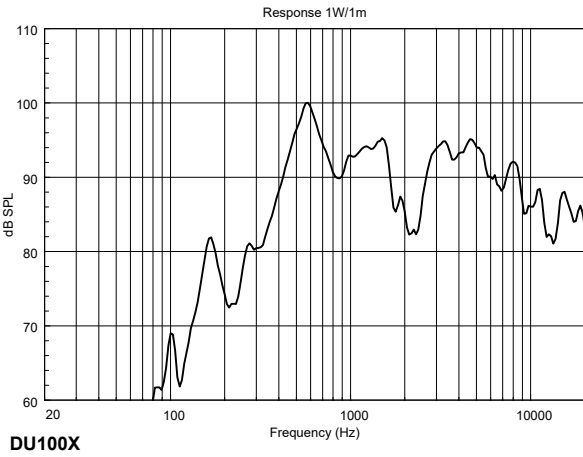

HORIZONTAL 1/3 POLAR PLOT

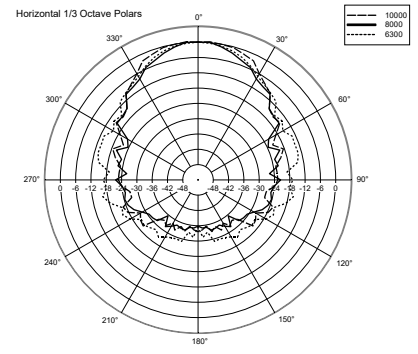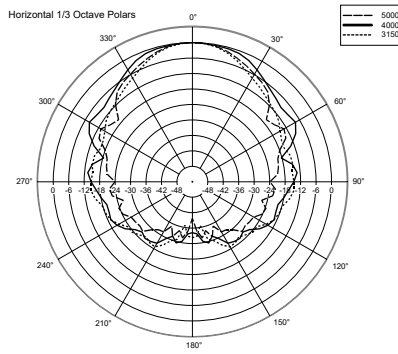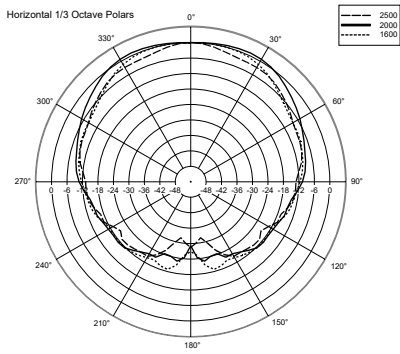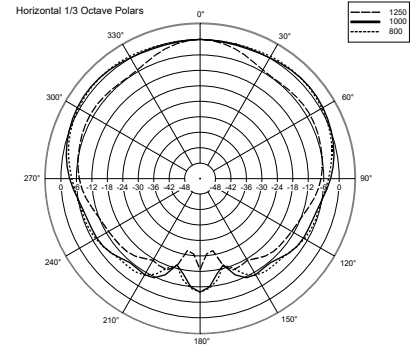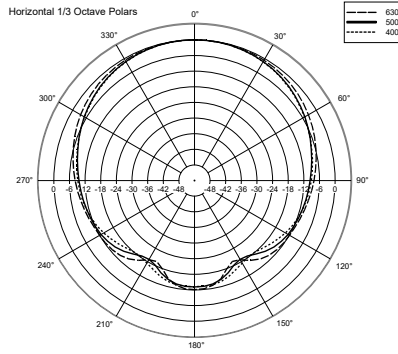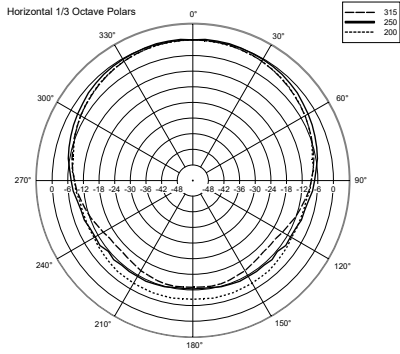

VERTICAL 1/3 POLAR PLOT

