

HF950

PRO HF HORN

DESCRIPTION

1-inch/1.4 inch Throat Adaptor. 90° x 50°
Constant Directivity Coverage. Structural
Polyurethane Perfectly Controlled Dispersion



FEATURES

- 1.4 inch Throat Adaptor
- 90° x 50° Constant Directivity Coverage
- Loading down to 400 Hz
- Structural Polyurethane
- Perfectly Controlled Dispersion



TECHNICAL SPECIFICATIONS



General specifications	Throat Diameter:	36 mm / 1.4 inch
	Horizontal coverage angle:	90°
	Vertical coverage angle:	50°
	Cut-off Frequency:	400 Hz
	Material:	Structural Polyurethane
Mounting informations	Overall height:	300 mm / 11.81 inches
	Overall width:	300 mm / 11.81 inches
	Overall depth:	208 mm / 8.19 inches
	Baffle Cut-out height:	260 mm / 10.24 inches
	Baffle Cut-out width:	260 mm / 10.24 inches
	Mounting:	4 x 7 mm holes, interaxes 101 mm
Size	Height:	221 mm / 8.7 inches
	Diameter:	270 mm / 10.63 inches
	Weight:	1.17 kg / 2.58 lbs
Shipping informations	Package Height:	239 mm / 9.41 inches
	Package Width:	332 mm / 13.07 inches
	Package Depth:	332 mm / 13.07 inches
	Package Weight:	2.1 kg / 4.63 lbs

PART NUMBER


- **13133080**

HF950

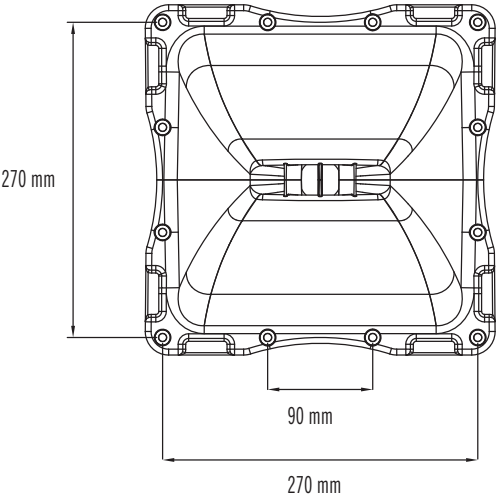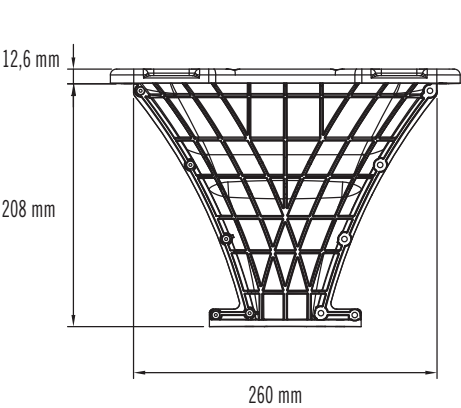


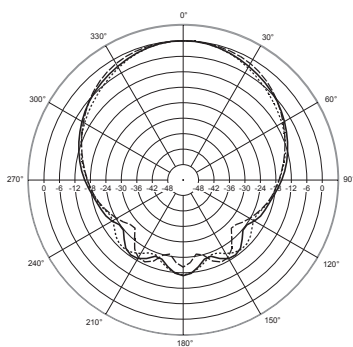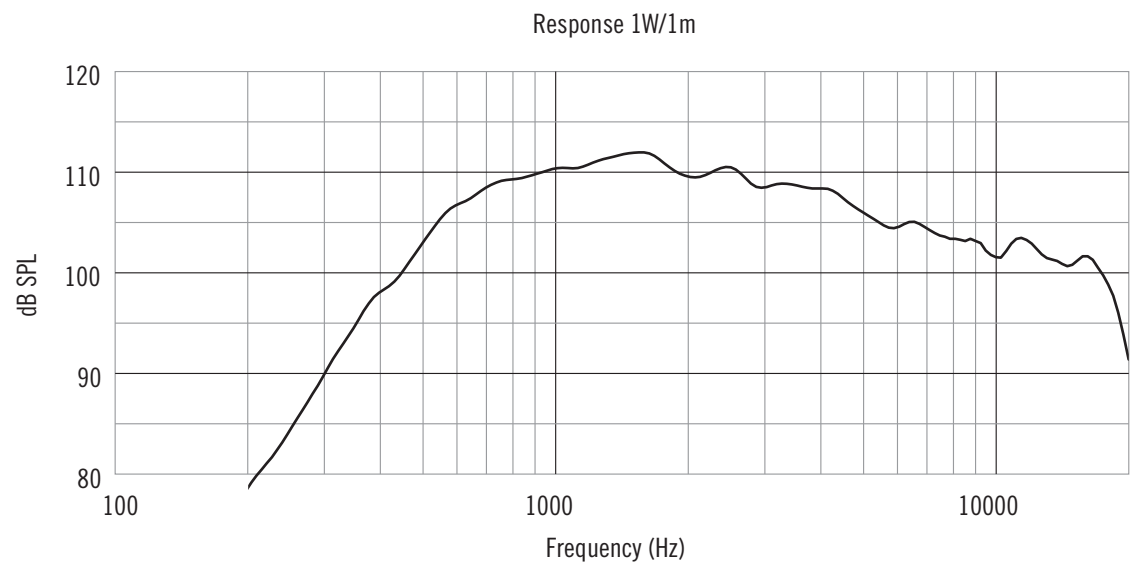


Horizontal 2000 Hz
1/3 Octave Polars

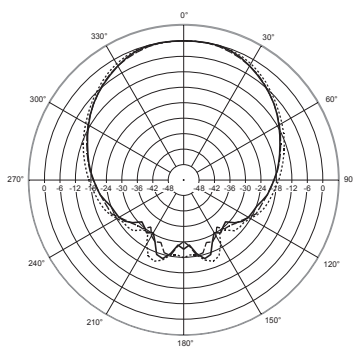


Horizontal 4000 Hz
1/3 Octave Polars

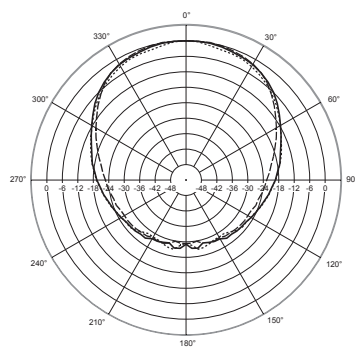


Horizontal 8000 Hz
1/3 Octave Polars

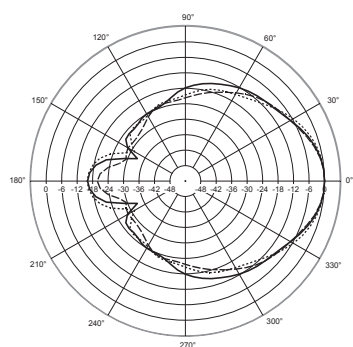

Vertical 2000 Hz
1/3 Octave Polars

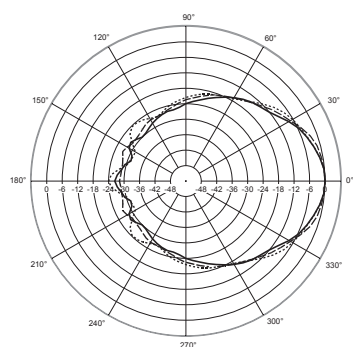

Vertical 4000 Hz
1/3 Octave Polars

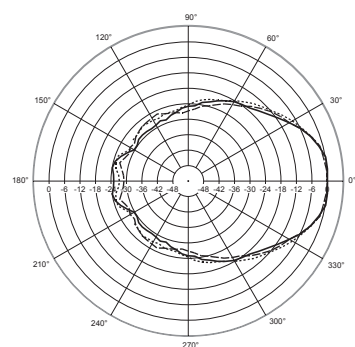

Vertical 8000 Hz
1/3 Octave Polars