



# KXW 4-A

## WIDE DIRECTIVITY ACTIVE TWO-WAY SPEAKER



### Description

The KXW 4-A is a compact, flexible high-output 2-way active speaker engineered for professional users, combining precise directivity, high SPL capability, and advanced rigging for both vertical and horizontal configurations. The low-frequency section features two 10" neodymium drivers in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 4" titanium dome, coupled to a rotatable 100° x 50° horn. An integrated two-channel 3200 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

### Features

- › 134 dB max SPL
- › Rotatable 100° x 50° coverage
- › LF 2 x 10" neodymium woofer, 3.0" voice coil
- › HF 4.0" titanium dome, neodymium comp. driver
- › 2 x Class-D amplifiers, 3200 Watt total power
- › DSP Processing with FIRPHASE and BMC
- › RDNet Networked Management
- › Advanced Rigging and powerCON TRUE1 TOP mains connectors

### Part Number


13000884 KXW 4-A	100-240 V	Black	EAN 8024530022143
13000959 KXW 4-A	US 100-240 V	Black	EAN 8024530023584



# KXW 4-A

## WIDE DIRECTIVITY ACTIVE TWO-WAY SPEAKER

Line Art 2D

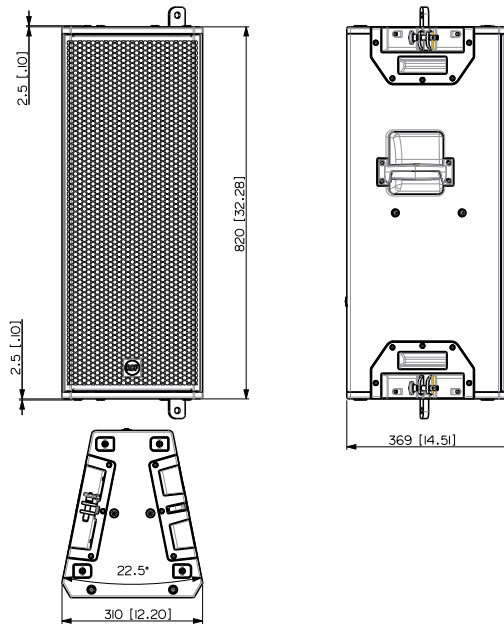

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz ÷ 20000 Hz
	Max SPL @ 1m	134 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	50°
<b>Transducers</b>	Compression Driver	1 x 1.4" neo, 4.0" v.c
	Woofer	2 x 10" neo, 3.0" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
<b>Processor section</b>	Crossover Frequencies	900Hz
	Protections	Thermal, RMS
	Limiter	Fast Limiter
	Controls	Gain Reduction, delay, proces., 8 sel. presets
<b>Power section</b>	RDNet	Onboard
	Total Power	3200 W Peak
	High frequencies	1200 W Peak
	Low frequencies	2000 W Peak
<b>Standard compliance</b>	Cooling	Convection
	Connections	Powercon TRUE1 TOP IN/OUT
	Safety agency	CE compliant
	<b>Physical specifications</b>	Cabinet/Case Material
Hardware		Array fittings, 2xM10 on the top, 2xM8 on each side
Handles		2 Side, 2 Rear
Pole mount/Cap		35 mm insert
Grille		Steel with clothing
Color		Black



# KXW 4-A

## WIDE DIRECTIVITY ACTIVE TWO-WAY SPEAKER

<b>Size / Weight</b>	Height	825 mm / 32.48 inches
	Width	310 mm / 12.2 inches
	Depth	369 mm / 14.53 inches
	Weight	30.4 kg / 67.02 lbs

<b>Rigging / Mounting</b>	<b>ACCESSORIES</b>		
	<b>FLOOR STANDS</b>		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	<b>FLY BARS</b>		
	13360697 FLB60697	Black	EAN 8024530023034
	<b>FLY BARS PICKUP</b>		
	13360696 FLB60696	Black	EAN 8024530023027
	<b>POLE MOUNT KITS</b>		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	<b>SUSPENSION CHAINS</b>		
	13360129 HOIST SPACING CHAIN CH 001	Black	EAN 8024530020774
	<b>VERTICAL BRACKETS</b>		
	13360698 VBR60698	Black	EAN 8024530023041
	<b>Protections</b>	<b>COVERS</b>	
13360694 CVR60694		Black	EAN 8024530023003
<b>RAIN PROTECTIONS</b>			
<b>Cables</b>	13360695 RPR60695	Black	EAN 8024530023010
	<b>CABLES</b>		
	12399019 CBL ETHERCON TO XLR F 0.2M	Black	EAN 8024530013882
	12399020 CBL ETHERCON TO XLR M 0.2M	Black	EAN 8024530013899
	<b>CABLES KIT</b>		
	13360102 AC XLR 3M3F		EAN 8024530006402
	12399016 CBL ETHERCON 0.7M	Black	EAN 8024530013844
	12399017 CBL ETHERCON 1.5M	Black	EAN 8024530013851
12399035 CBL ETHERCON 3M	Black	EAN 8024530013868	
12399018 CBL ETHERCON 5M	Black	EAN 8024530013875	