

ND340

DRIVER

DESCRIPTION

The ND340 is a high performance neodymium compression driver with a 1.0-inch exit throat. The diaphragm is precision formed from polyimide. The 1.75" voice coil assembly use high temperature Kapton former, edge wound copper clad aluminum wire and assembled using advanced, specially formulated adhesives.



FEATURES

- 1.75-inch Diaphragm, 1.0-inch Exit Throat
- 100 watt Continuous program power handling
- Frequency range: 1200Hz - 20kHz
- 2-slot, optimised geometry phase plug
- Polyimide diaphragm
- Extremely compact neodymium magnet assembly

TECHNICAL SPECIFICATIONS



General specifications	Exit Throat Diameter:	1.0 inch / 25 mm
	Related Impedance:	8 ohm
	Program Power (watt):	100 W
	Power handling capacity (watt):	50 W
	Sensitivity:	109 dB
	Frequency range:	1200 - 20000 Hz
	Suspension Design:	Flat
	Minimum Impedance (ohm):	6.50 ohm
	Voice Coil Diameter:	1.75 inch / 44 mm
	Voice Coil Former Design:	Straight - Kapton
	Number of layers:	1
	Kind of layers:	outside
	Flux Density:	1.9 T
	Phase Plug Design:	2 slot
Thiele - small parameters	Bl factor (Bl) (T x m):	7.90 T x m
Mounting information	Overall diameter:	76 mm / 2.99 inches
	Overall height:	39 mm / 1.54 inches
	Mounting:	4 x 5 mm threaded holes at 90°
Standard compliance	Safety agency:	CE compliant
Size	Weight:	0.63 kg / 1.39 lbs
Shipping information	Package Height:	65 mm / 2.56 inches
	Package Width:	95 mm / 3.74 inches
	Package Depth:	97 mm / 3.82 inches
	Package Weight:	0.81 kg / 1.79 lbs

PART NUMBER

- **15129054**

ND340

8ohm

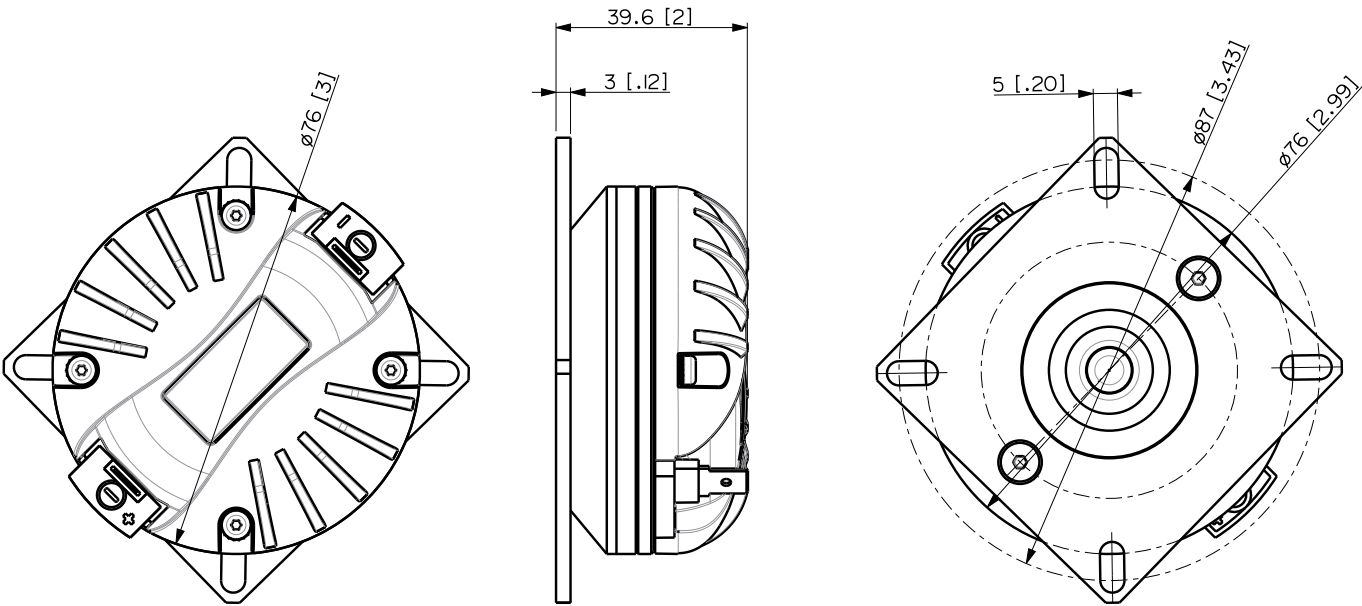

VISTA 3D / 3D VIEW



C.DRIVER ND340 8 OHM

REV.
A

