


NX 32-A

ACTIVE TWO WAY MULTIPURPOSE SPEAKER

DESCRIPTION

The NX 32-A is an active speaker specifically designed to be the everyday tool for rental companies and professional musicians. It's one of the most flexible speaker for deploying high-quality sound as a stand-alone FOH system or as a satellite (with subwoofer) but either as a stage monitor or a or a front, down or side fill speaker.

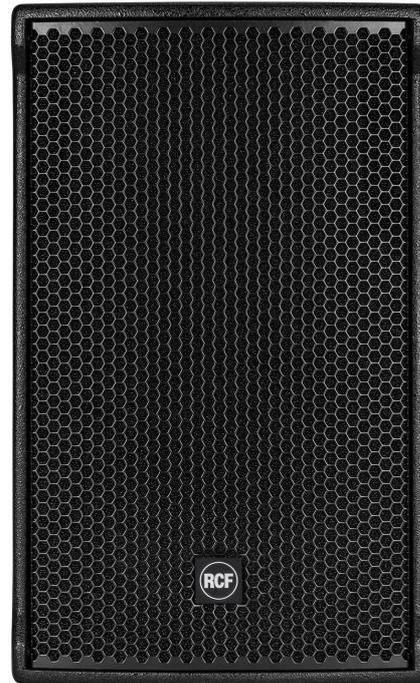

FEATURES

- 1400 W 2-way class-D amplifier
- 131 dB SPL Max
- 50 - 20000 Hz Frequency Range
- 90° x 60° constant directivity coverage
- 12" woofer, 2.5" voice coil
- Horn loaded 3.0" neodymium c. driver
- Multiple rigging points

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------------|----------------------------|-------------------------|
| Acoustical specifications | Frequency Response: | 50 Hz ÷ 20000 Hz |
| | Max SPL @ 1m: | 131 dB |
| | Horizontal coverage angle: | 90° |
| | Vertical coverage angle: | 60° |
| Transducers | Compression Driver: | 1.4" neo, 3.0" v.c |
| | Woofers: | 12", 2.5" v.c |
| Input/Output section | Input signal: | bal/unbal |
| | Input connectors: | XLR, Jack |
| | Output connectors: | XLR |
| | Input sensitivity: | -2 dBu/+4 dBu |
| | Mic. Input Sensitivity: | -32 dBu |
| Processor section | Crossover Frequencies: | 700 Hz |
| | Protections: | Thermal, RMS |
| | Limiter: | Soft Limiter |
| | Controls: | Volume, boost, Mic/Line |
| Power section | Total Power: | 1400 W Peak, 700 W RMS |
| | High frequencies: | 400 W Peak, 200 W RMS |
| | Low frequencies: | 1000 W Peak, 500 W RMS |
| | Cooling: | Convection |
| | Connections: | Powercon IN/OUT |
| Standard compliance | Safety agency: | CE compliant |
| Physical specifications | Cabinet/Case Material: | Baltic birch plywood |
| | Hardware: | 5 x M10, 4 x quick lock |
| | Handles: | 2 Side |
| | Pole mount/Cap: | Yes |
| | Grille: | Steel |
| | Color: | Black |
| Size | Height: | 600 mm / 23.62 inches |
| | Width: | 365 mm / 14.37 inches |
| | Depth: | 378 mm / 14.88 inches |
| | Weight: | 20.6 kg / 45.42 lbs |
| Shipping information | Package Height: | 655 mm / 25.79 inches |
| | Package Width: | 425 mm / 16.73 inches |
| | Package Depth: | 440 mm / 17.32 inches |
| | Package Weight: | 23.6 kg / 52.03 lbs |



PART NUMBER

• **13000551**

NX 32-A

115V


EAN 8024530015480







• **13000550**









NX 32-A









220-240V

EAN 8024530015312

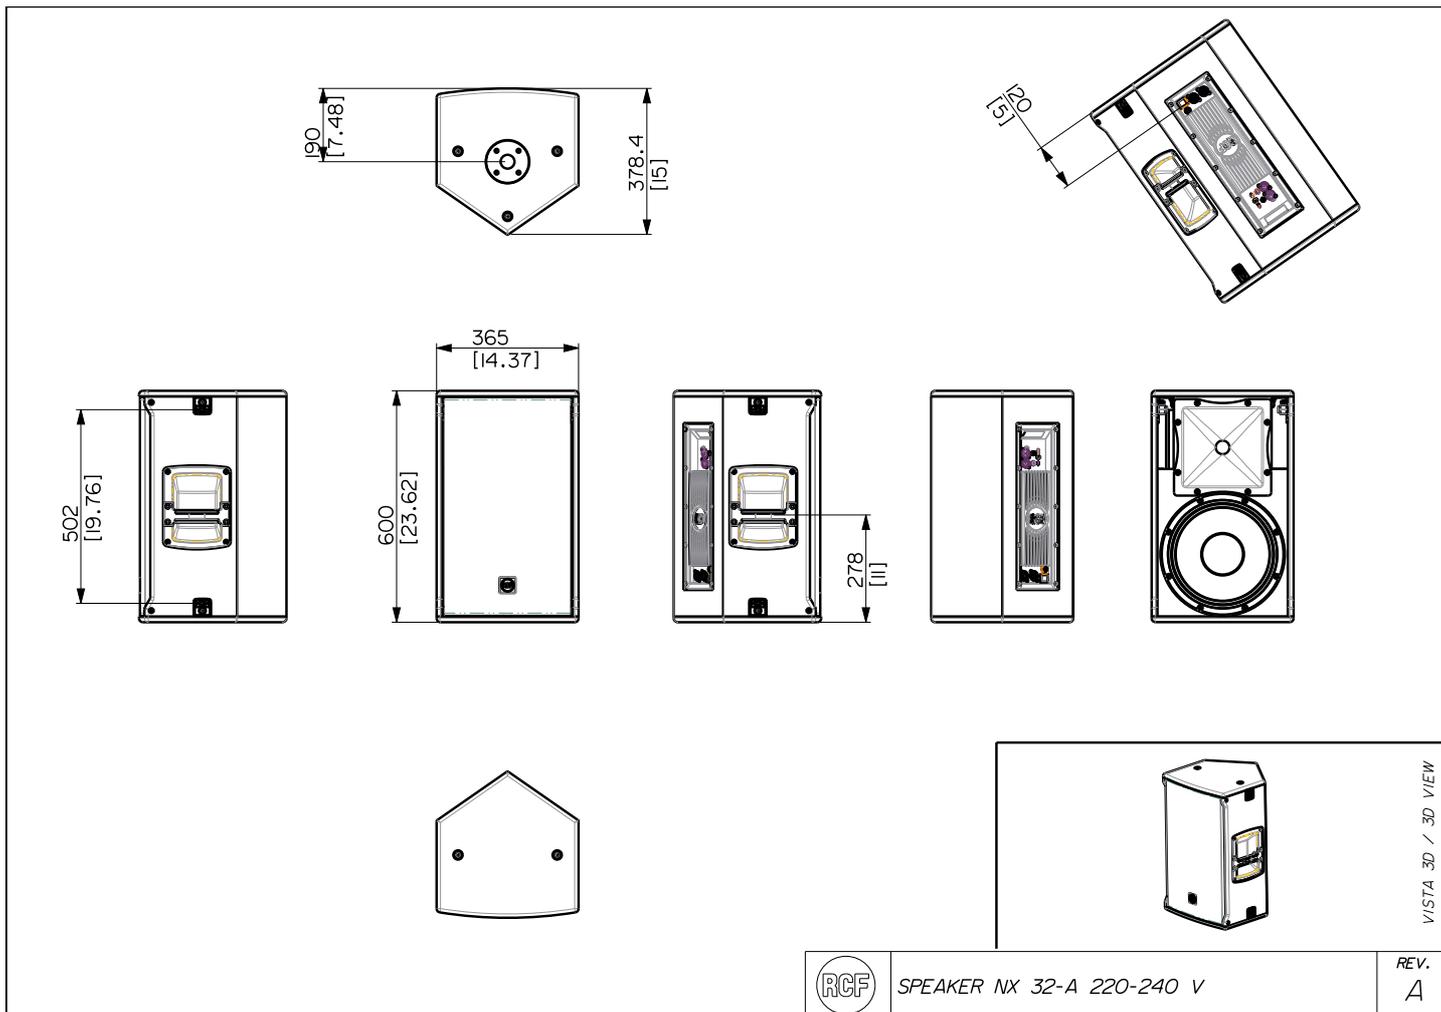

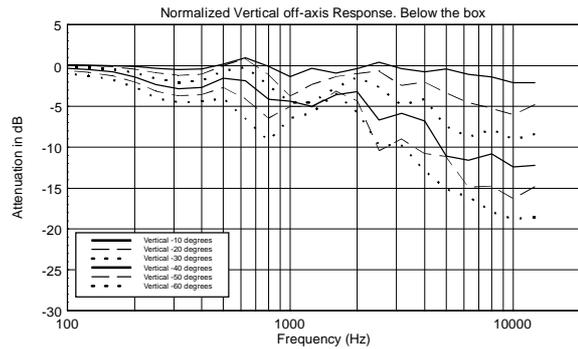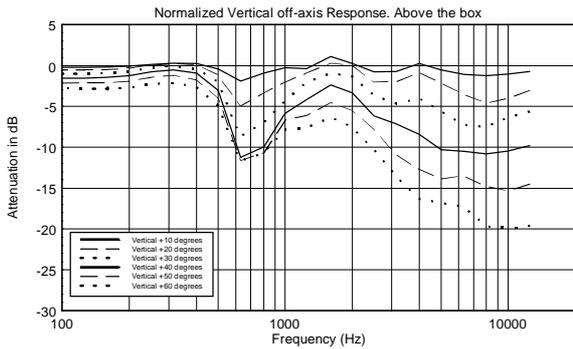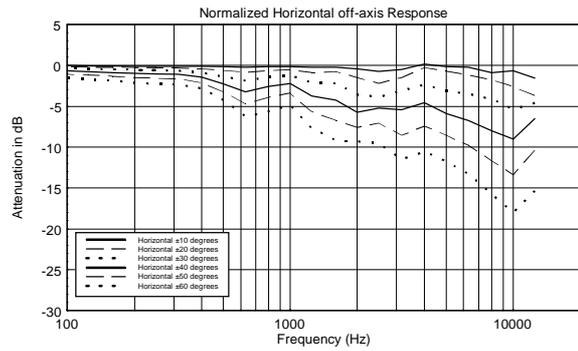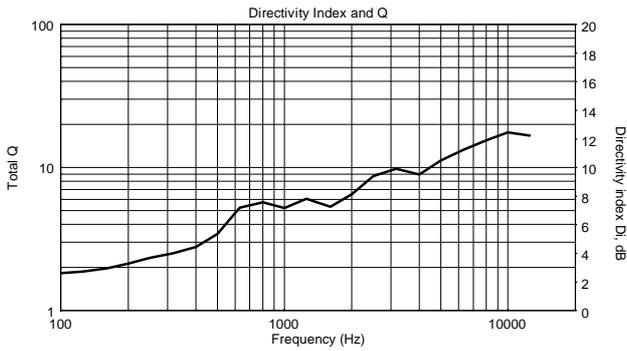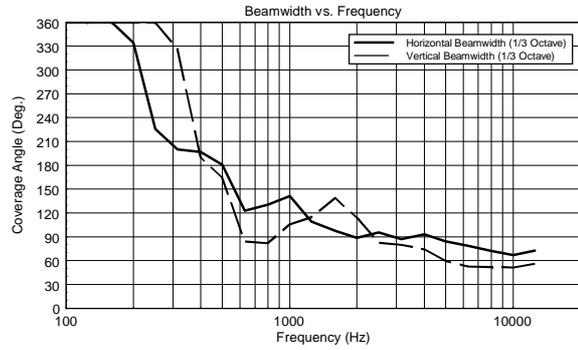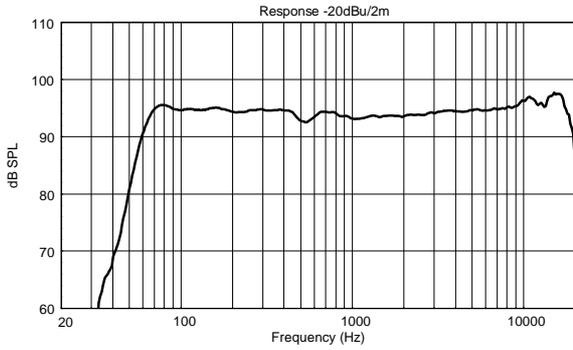

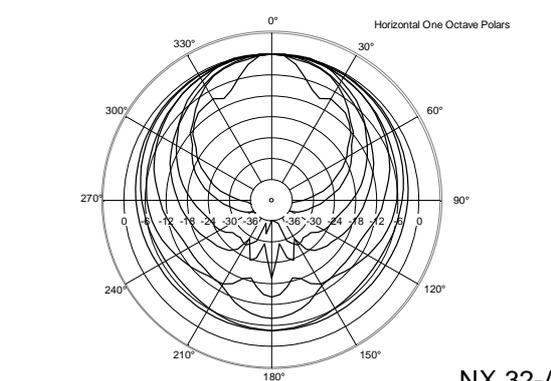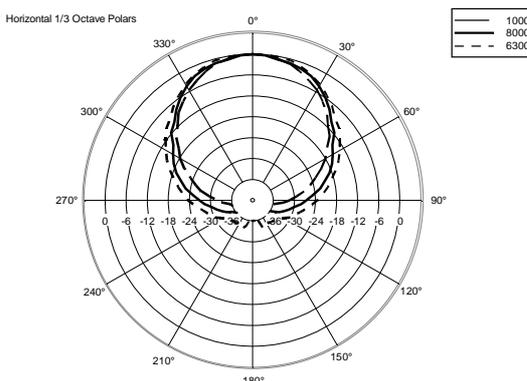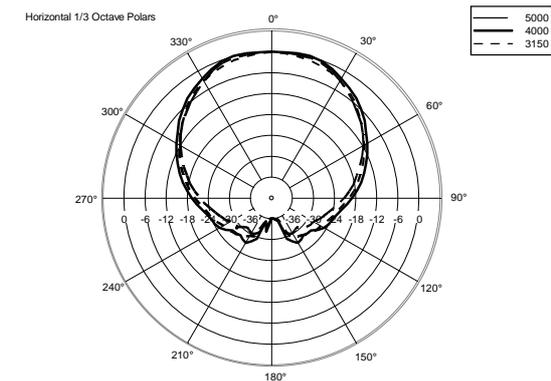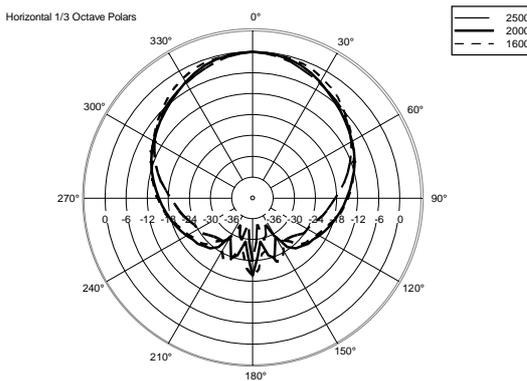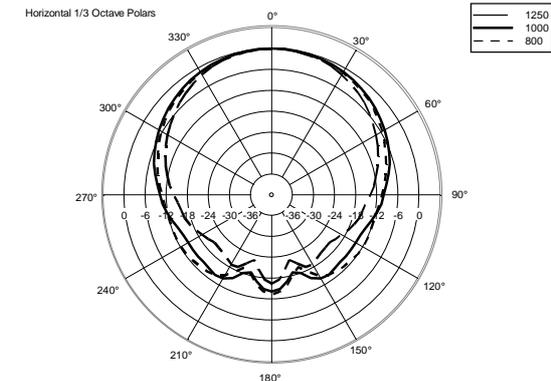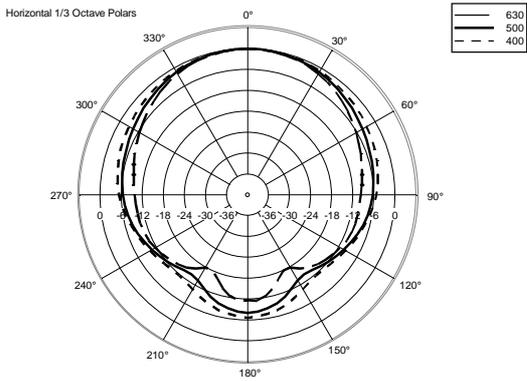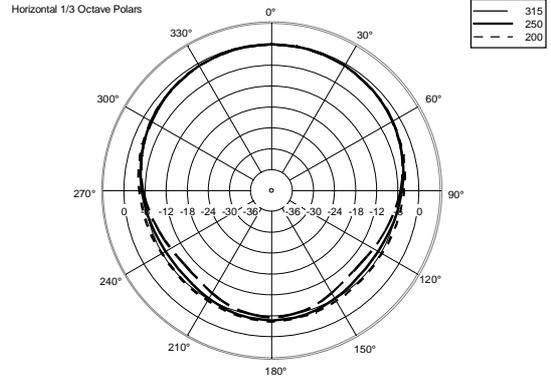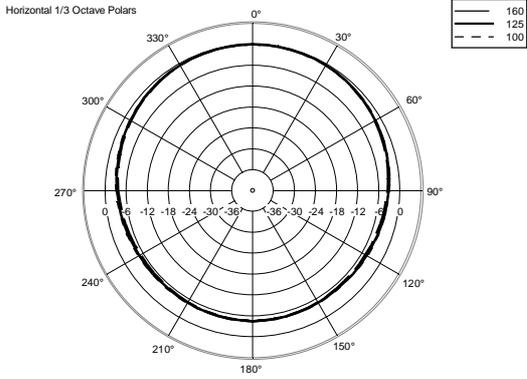

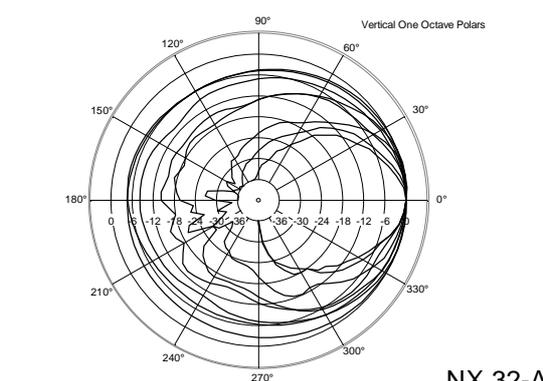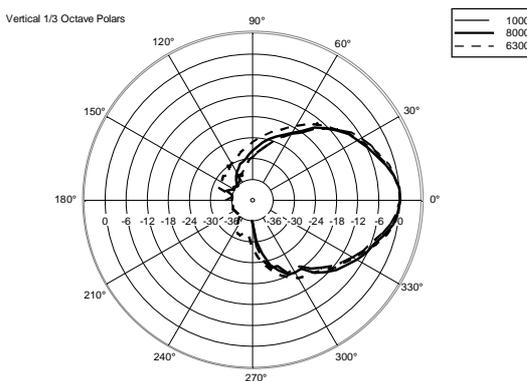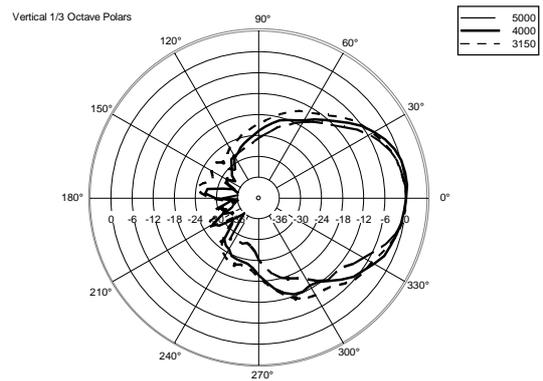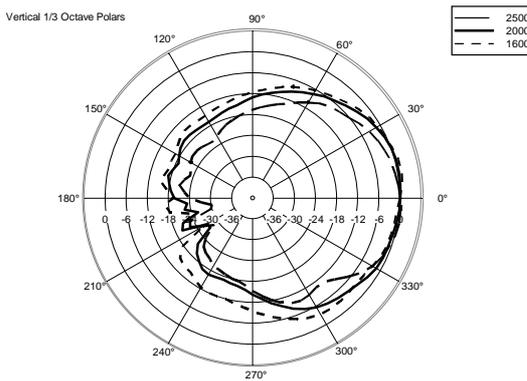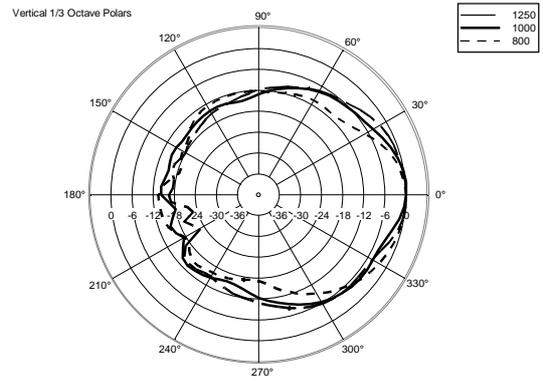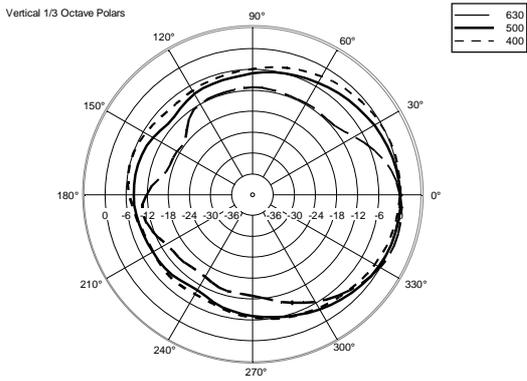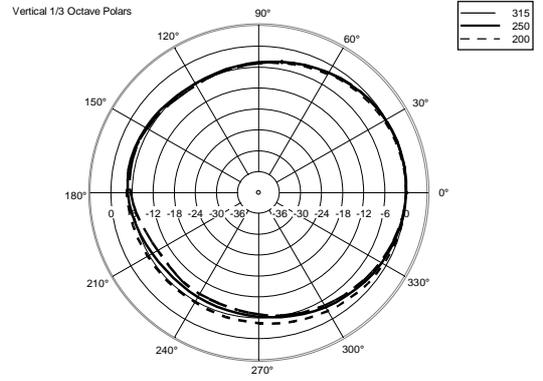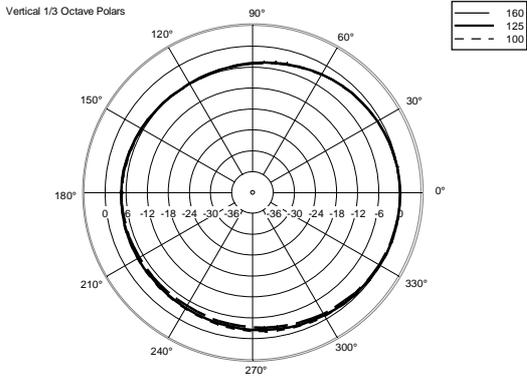

ACCESSORIES

AC PMX POLE MOUNT M20

PART NUMBER **13360232**
EAN: 8024530010058

AC PRO-FS PROFESS. LOCKING FLOOR STAND

PART NUMBER **13360109**
EAN: 8024530006471

AC PRO-PM PROFESS. LOCKING POLE MOUNT

PART NUMBER **13360110**
EAN: 8024530006488

COVER CVR NX 32

PART NUMBER **13360408**
EAN: 8024530016227

KIT EYEBOLT 4 X

PART NUMBER **13360031**
EAN: 8024530018870

POLE MOUNT KIT PM-KIT M20

PART NUMBER **13360067**
EAN: 8024530014599

VERTICAL BRACKET V-BR TT 22 II

PART NUMBER **13360328**
EAN: 8024530013332