



# XPS 16KD

DANTE-EQUIPPED 4-CHANNEL DSP POWER AMPLIFIER



### Description

XPS 16KD is a four-channel power amplifier with advanced processing and advanced routing with Dante, digital and analog I/O for both touring and install use. With 4x4000 W Class D continuous power at 2.7 ohms, 40-bit floating-point processing at 96 kHz, and 32-bit internal routing, XPS 16K packs extreme power density in a 2U chassis.

Designed for both touring and installed sound systems, XPS is intended for use with high-performance speakers and provides ready-to-use configurations and presets. It can also be used in linear mode with advanced tuning capabilities.

Each output features: 4000 ms output delay (1372 m / 4501 ft), EQ Filters, Crossovers, FIR Filters, Multiband Compressor, RMS Limiter, and Thermal limiter.

XPS delivers rider-friendly premium sound with full RNet remote management, large touch interface onboard, exceptional signal/noise ratio, ultra-low distortion, and extreme dynamic range.

### Features

- › 16000 W Total Continuous Power
- › 40-bit Floating-point DSP and 32-bit routing up to 96 kHz
- › Dante Audio Network
- › FIRPHASE, Bass Motion Control, Bass Shaper
- › RNet Networked Management
- › Touch 4.3" Color TFT Interface
- › Full On-board Processing with Delay, EQ, Comp/Limiter
- › On-board Speaker Presets Library
- › Class-D Modules with SMPS and Advanced PFC

### Part Number


12100064	XPS 16KD	EU	90-240 V	Black - RAL 9005	EAN 8024530020125
12100075	XPS 16KD	US	90-240 V	Black - RAL 9005	EAN 8024530020392
12100077	XPS 16KD	UK	90-240 V	Black - RAL 9005	EAN 8024530020859



# XPS 16KD

DANTE-EQUIPPED 4-CHANNEL DSP POWER AMPLIFIER

## Line Art 2D

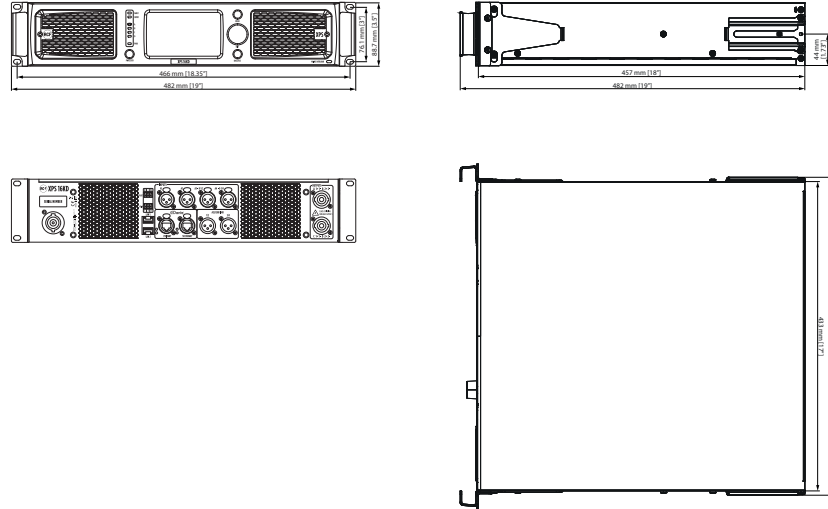

## TECHNICAL SPECIFICATIONS

### Amplifier specifications

Amplifier Class	D
Output Power (EIAJ 8:32 all channels driven)	4 x 4000 W @ 2.7 ohm 4 x 2600 W @ 4 ohm 4 x 1400 W @ 8 ohm
Frequency Response (-3dB)	20 Hz ÷ 23000 Hz
SNR Analog inputs (unweighted)	>111 dB
SNR Digital inputs (unweighted)	>115 dB
Crosstalk	<70 dB
Distortion (THD+N) (20 Hz ÷ 20000 Hz, 1000 W @ 4 ohm)	<0.2 %
Gain (linear mode @ 0 dB)	32 dB
Damping factor (@ 8 ohm, 20 Hz ÷ 1500 Hz)	>95
Max burst length (@ 50 Hz, CF = 7 dB, 4 ohm, 1% THD+N)	200 ms

### Input section

Total number of inputs	16
Line inputs	4
Line connectors	XLR
Digital inputs	12
Digital connectors	Ethercon, XLR
Digital type	AES/EBU, DANTE
General Purpose Inputs (GPI)	2
Programmable GPI	Yes
Photo-coupled GPI	2

### Output section

Signal output number	4
Signal output connectors	XLR
Power output connectors	Speakon
General Purpose Outputs (GPO)	3
Programmable GPO	Yes



# XPS 16KD

## DANTE-EQUIPPED 4-CHANNEL DSP POWER AMPLIFIER

<b>Processing</b>	DSP EQ Filters Advanced algorithms  Compressors Delay Tone controls High-pass filter Crossover Automatic Gain Control (ACG)	Yes Yes FiRPHASE technology   BASS shaper   air compensation   mid-low correction   driver excursion control   dynamic PEQ   multi-band compressor   pilot tone detection   backup recovery strategy   impedance load measurement Yes Yes Yes 10 Hz ÷ 1000 Hz 2500 ÷ 3500 Hz Yes
<b>Configuration and control</b>	Configuration Network RCF speakers presets Priority RDNet	Front panel touch screen, PC Software Gigabit ethernet Yes Yes Onboard
<b>Protections</b>	Cooling Short circuit Thermal DC Fuses VHF (Very High Frequencies)	Forced Yes Yes Yes Yes Yes
<b>Operating conditions</b>	Temperature range - Continuous operation Temperature range - Reduced output power Fan noise idle Fan noise max	-5°C ÷ +40°C / +23°F ÷ +104°F -5°C to +50°C / +23°F to +122°F <35 dBA <64 dBA
<b>Power requirement</b>	Operating voltage Nominal current AC @ 100-120 V Nominal current AC @ 220-240 V Stand by power consumption Idle power consumption Power consumption Main fuse Fuses Model	90-240 V- 50/60Hz 30 A 16 A 20 W 90 W 5800 W Internal F 315 mA H 100 V
<b>Standard compliance</b>	Safety agency	CE compliant, UL 62368-1, 3rd Ed. CSA C22.2 No. 62368-1:19, 3rd Ed.
<b>Physical specifications</b>	Cabinet/Case Material Handles Color Rack mounting	Metal 2 metal handles for rack mount Black - RAL 9005 19", 2U
<b>Size / Weight</b>	Height Width Depth Weight	88.7 mm / 3.49 inches 482 mm / 18.98 inches 482.4 mm / 18.99 inches 15 kg / 33.07 lbs