

AM 6020

MOBILE AMPLIFIER

DESCRIPTION

The AM 6020 is specially designed for use on vehicles such as cars, trucks, boats, etc. Its dimensions fit DIN standards for easy installation in the normal vehicle radio space and fittings. The AM 6020's 600 Hz siren is especially useful on boats in foggy conditions.



FEATURES

- 2 unbalanced AUX stereo inputs on DIN connector
- 1 balanced microphone input on DIN connector
- 1 balanced microphone input on XLR connector
- Circuit for automatic attenuation of music in the presence of announcements
- One-tone signal generator 600 Hz (siren)
- Protection against overload and short circuits
- Power supply 12 Vdc or 24 Vdc selectable

TECHNICAL SPECIFICATIONS

Amplifier specifications	Number of channels:	2
	Power output per channel (@ 4 ohm):	10 W RMS
	Power output per channel (@ 8 ohm):	20 W RMS
	Frequency Response (-3dB):	20 Hz ÷ 15 kHz
	Distortion (THD+N) @ 1 kHz nominal power:	<0.5 %%
Input section	Total number of inputs:	3
	Balanced:	3
	Unbalanced:	2
	Mono:	2
	Stereo:	1
	Mic inputs:	2
	Mic connectors:	DIN 5 pole, XLR
	Line inputs:	1
	Line connectors:	DIN 5 pole
General Purpose Inputs (GPI):	1	
Output section	Power output connectors:	Euroblock
Processing	Tone controls:	Yes
Controls	Configuration:	Front panel
Protections	Cooling:	Convection
	Fuses:	Yes
Power requirement	DC power:	Yes
	DC power value:	24 V
	Power consumption (MAX):	80 W
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Metal
	Color:	Black
Size	Height:	50 mm / 1.97 inches
	Width:	200 mm / 7.87 inches
	Depth:	190 mm / 7.48 inches
	Weight:	1.03 kg / 2.27 lbs
Shipping informations	Package Height:	77 mm / 3.03 inches
	Package Width:	285 mm / 11.22 inches
	Package Depth:	265 mm / 10.43 inches
	Package Weight:	1.5 kg / 3.31 lbs




PART NUMBER

- **12110012**

AM 6020

EAN 8024530015862

DRAWINGS

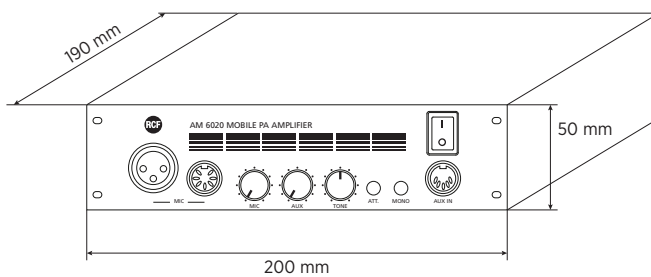

PANELS

Front panel

