

HF99

PRO HF HORN

DESCRIPTION

1-inch/1.4 inch Throat Adaptor. 90° x 90° Constant Directivity Coverage. Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers. Perfectly Controlled Dispersion



FEATURES

- 1.4 inch Throat Adaptor
- 90° x 90° Constant Directivity Coverage
- Loading down to 500 Hz
- Thick Aluminum Body for best heat dissipation in conjunction to Neodimium Compression Drivers
- Perfectly Controlled Dispersion




TECHNICAL SPECIFICATIONS

General specifications	Throat Diameter:	36 mm / 1.4 inch
	Horizontal coverage angle:	90°
	Vertical coverage angle:	90°
	Cut-off Frequency:	500 Hz
	Material:	Aluminium
Mounting informations	Overall height:	250 mm / 9.84 inches
	Overall width:	250 mm / 9.84 inches
	Overall depth:	123 mm / 4.84 inches
	Baffle Cut-out height:	200 mm / 7.87 inches
	Baffle Cut-out width:	200 mm / 7.87 inches
	Mounting:	4 x 7 mm holes, interaxes 101 mm
Physical specifications	Color:	Black
Size	Height:	130 mm / 5.12 inches
	Diameter:	250 mm / 9.84 inches
	Weight:	1.5 kg / 3.31 lbs
Shipping informations	Package Height:	160 mm / 6.3 inches
	Package Width:	290 mm / 11.42 inches
	Package Depth:	290 mm / 11.42 inches
	Package Weight:	2.28 kg / 5.03 lbs

PART NUMBER



- **13133069**

HF99

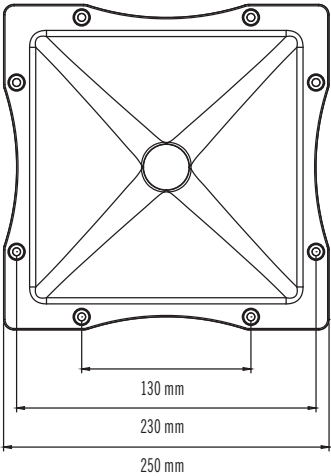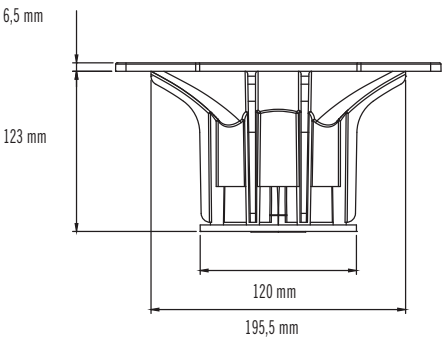





Response 1W/1m

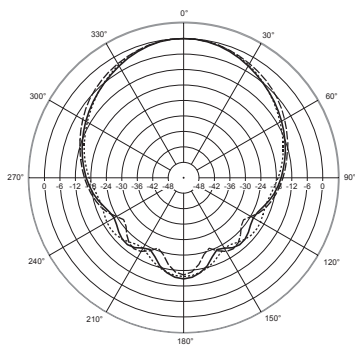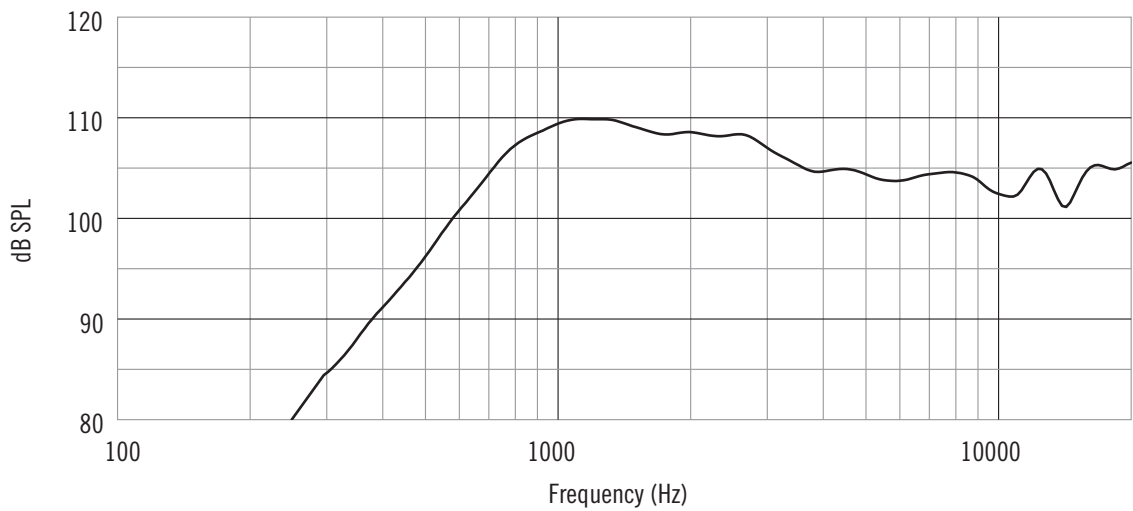


Horizontal 2000 Hz
1/3 Octave Polars

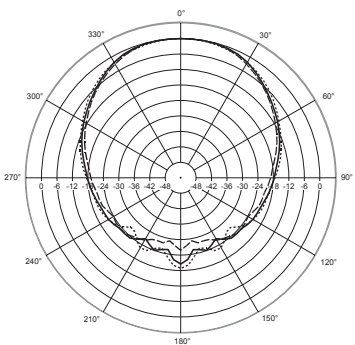


Horizontal 4000 Hz
1/3 Octave Polars

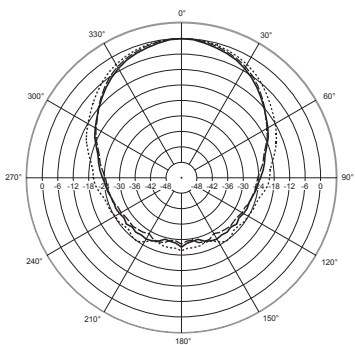


Horizontal 8000 Hz
1/3 Octave Polars

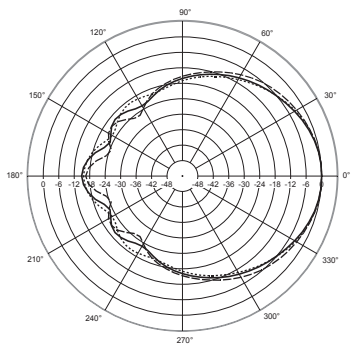

Vertical 2000 Hz
1/3 Octave Polars

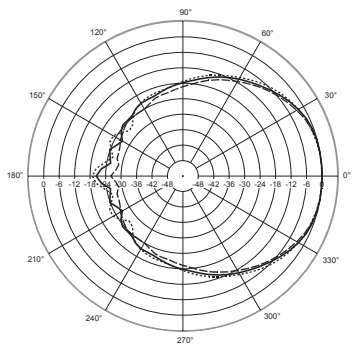

Vertical 4000 Hz
1/3 Octave Polars

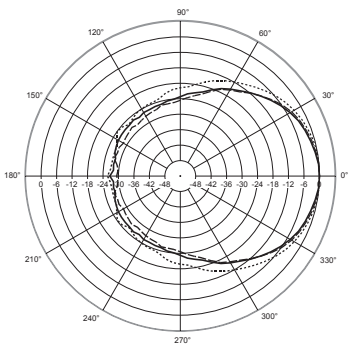

Vertical 8000 Hz
1/3 Octave Polars