

PL 60

HIGH EFFICIENCY CEILING SPEAKER

DESCRIPTION

The PL60 is a ceiling speaker with an elegant design, intended for recess installation in false ceilings or panels. It is ideal for the reproduction of announcements and background music and features a multiplesocket line transformer for use with constant voltage systems.



FEATURES

- 6" fullrange transducer
- Power selectable (70 V / 100 V): 6 W – 3 W – 1.5 W
- 91 dB sensitivity
- Colour white RAL 9003
- Plastic frame, steel grille

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	90 Hz ÷ 20000 Hz
	Max SPL @ 1m	107 dB
	Coverage angle	90°
	System Sensitivity	91 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	6 W
	Peak Power Handling	24 W PEAK
	Recommended Amplifiers	DMA 504, DMA 162, DMA 82, DMA 162P, ES 2160, ES 3080, AM 2320, AM 2160, AM 2080, AM 1125, UP 8504, UP 8502, UP 8501, UP 2321, UP 2162
Transducers	Fullrange	6.0"
Input/Output section	Input connectors	Screw Terminals
	Output connectors	Screw Terminals
	Constant Voltage Transformer	70/100 V
	Power selection 1	6 W - 1667 ohm
	Power selection 2	3 W - 3333 ohm
	Power selection 3	1.5 W - 6667 ohm
Standard compliance	Safety agency	CE compliant
Physical specifications	Hardware	Plastic Material
	Color	White - RAL 9003
Size	Depth	75 mm / 2.95 inches
	Recessed Depth	69 mm / 2.72 inches
	Diameter	204 mm / 8.03 inches
	Weight	0.34 kg / 0.75 lbs
Shipping information	Package Height	105 mm / 4.13 inches
	Package Width	240 mm / 9.45 inches
	Package Depth	235 mm / 9.25 inches
	Package Weight	1.07 kg / 2.36 lbs


PART NUMBER


- **13110214**

PL 60



EAN 8024530010102

DRAWINGS






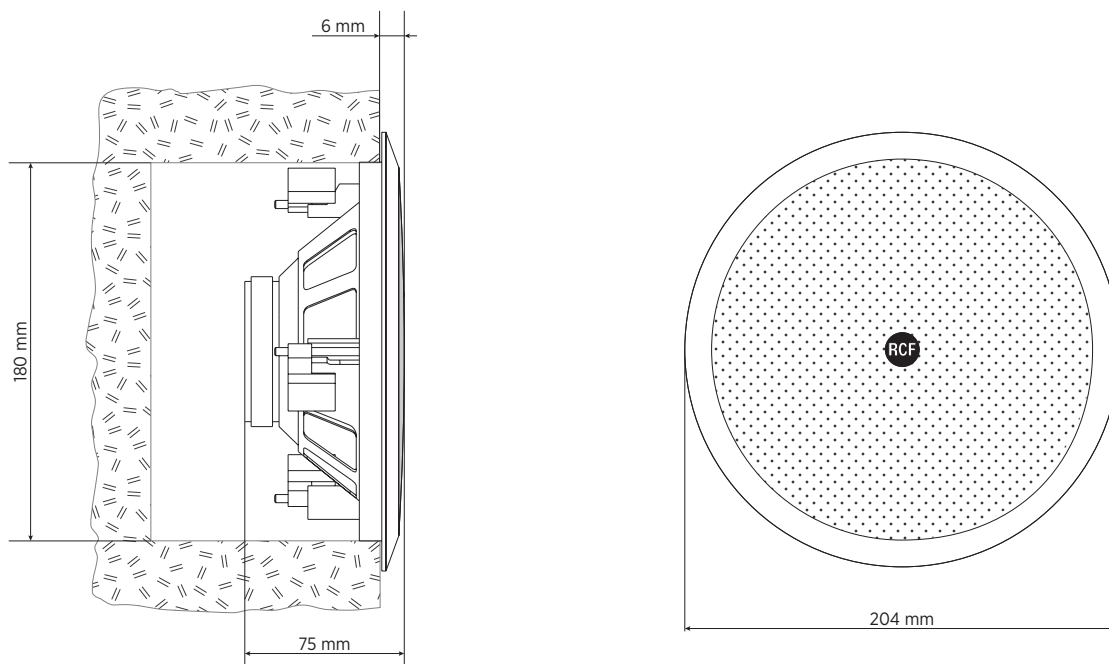


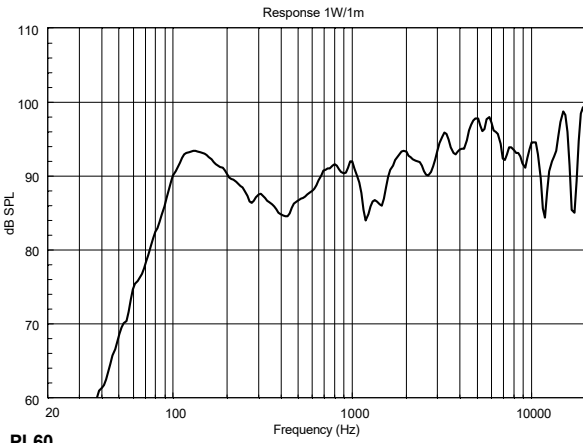

PL60

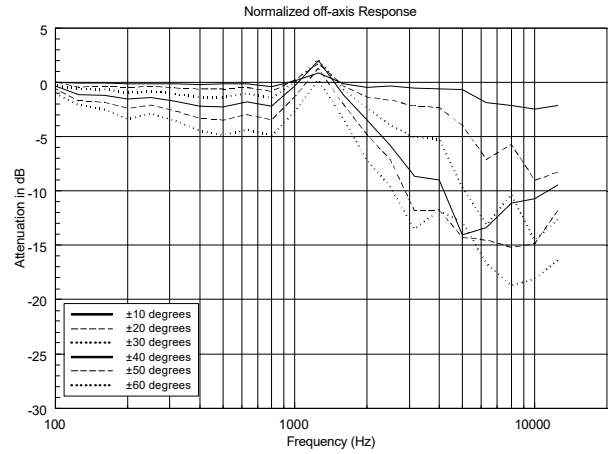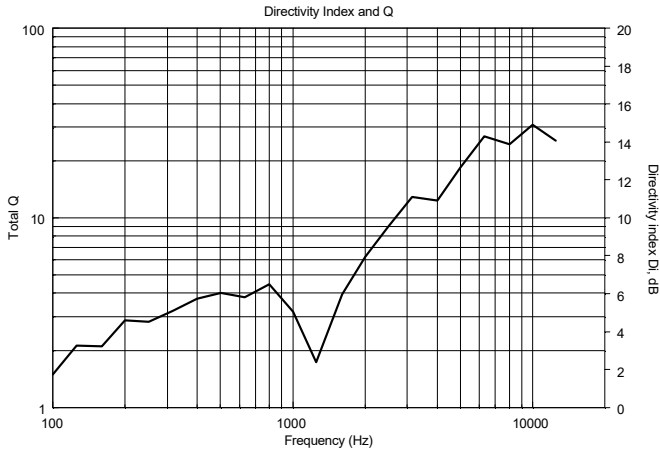

HORIZONTAL 1/3 POLAR PLOT

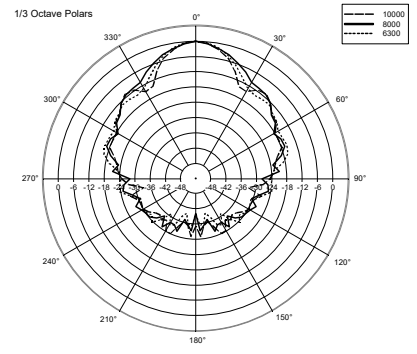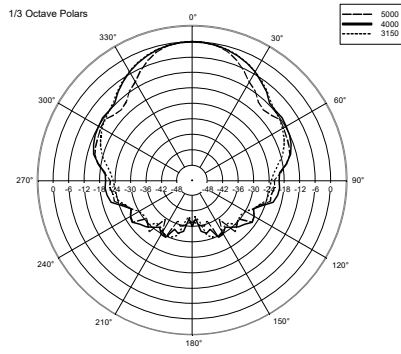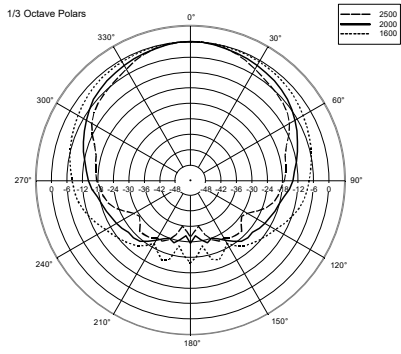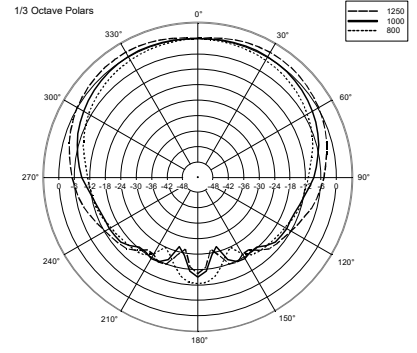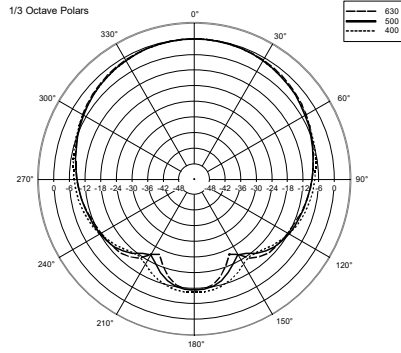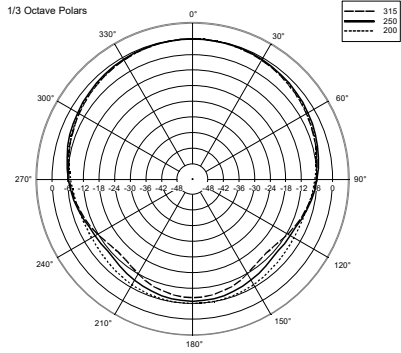

ACCESSORIES



ACCESSORY A 1360

PART NUMBER **13320107**
EAN: 8024530015794
