




# TTS 56-A

ACTIVE HIGH POWER SUBWOOFER

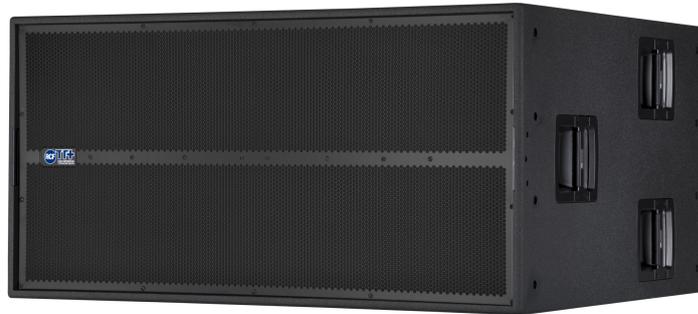

**Description** The TTS56-A is a high power, high output active subwoofer system that sets a new standard in the touring sound reinforcement. The new 21" neodymium design represents the result of many years dedicated in pioneering new solutions for the transducers technology. The integration of the 6800 W, two channel digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency.

- Features**
- › 2 x 3400 W digital amplifiers
  - › 2 x 21" high power neodymium woofers
  - › 96 kHz, 32 bit DSP processing
  - › Remote monitoring and control
  - › Time delay alignment
  - › Cardioid preset for groups
  - › Tour grade cabinet
  - › RDNet on board
  - › Maximum output per size on market

**Part Number** 13000190 TTS 56-A 90-240 V Black EAN 8024530008611



# TTS 56-A

## ACTIVE HIGH POWER SUBWOOFER

		<b>TECHNICAL SPECIFICATIONS</b>	
<b>Acoustical specifications</b>	Frequency Response	30 Hz ÷ 100 Hz	
	Max SPL @ 1m	145 dB	
<b>Transducers</b>	Woofers	2 x 21" neo, 4.5" v.c	
<b>Input/Output section</b>	Input signal	bal/unbal	
	Input connectors	XLR, RDNet Ethercon	
	Output connectors	XLR, RDNet Ethercon	
	Input sensitivity	-2 dBu/+10 dBu	
<b>Processor section</b>	Hi-Pass Frequencies	30-45 Hz	
	Low-Pass Frequencies	60-90 Hz	
	Protections	Thermal, Excurs., RMS	
	Limiter	Soft Limiter	
	Controls	DSP Controlled	
	RDNet	Yes	
<b>Power section</b>	Total Power	13600 W Peak, 6800 W RMS	
	Low frequencies	13600 W Peak, 6800 W RMS	
	Cooling	Convection/Forced	
	Connections	Powercon IN/OUT	
<b>Standard compliance</b>	Safety agency	CE compliant	
<b>Physical specifications</b>	Hardware	2 x steel bar fork - lift transportation, 4 x 100 mm wheels	
	Handles	6 side	
	Color	Black	
<b>Size</b>	Height	590 mm / 23.23 inches	
	Width	1170 mm / 46.06 inches	
	Depth	988 mm / 38.9 inches	
	Weight	122.8 kg / 270.73 lbs	
<b>ACCESSORIES</b>			
-	AC XLR 3M3F	13360102	8024530006402
	NYLON SLEED TTS 56	13360157	
<b>Cables</b>	CBL ETHERCON 0.7M	12399016	8024530013844
	CBL ETHERCON 3M	12399035	8024530013868
	CBL ETHERCON 5M	12399018	8024530013875
	CBL ETHERCON TO XLR F 0.2M	12399019	8024530013882
	CBL ETHERCON TO XLR M 0.2M	12399020	8024530013899
	CBL LK 25 MULTIPIN 10M	12399023	8024530013837
	CBL LK 25 MULTIPIN 20M	12399022	8024530013820
	CBL LKS 19 ARRAY FANOUT	12399024	8024530013905
	CBL LKS 19 BREAKOUT	12399026	8024530013929
	CBL LKS 19 POWER 10M	12399027	8024530013936
	CBL LKS 19 POWER 20M	13360146	8024530013943
	CBL LKS 19 SUB FANOUT	12399025	8024530013912
	CBL LKS 25-2 FANOUT	12399021	8024530013813
	CBL POWER BOX 6X	13360145	8024530015534
	CBL POWERCON LINK 1.5M	12399030	8024530013721
	CBL POWERCON LINK 10M	12399028	8024530013707
	CBL POWERCON LINK 5M	12399029	8024530013714
	POWER CABLE X6 TTL 55-A	13360138	
<b>Protections</b>	CVR FRONT TTS 56	13360140	
	CVR TTS 56	13360135	8024530006792
	RP 1X TTS 56	13360137	
<b>Transportation</b>	WH PRO 4X	13360238	8024530018320