

# **MD 7600**

## DYNAMIC MICROPHONES

## **DESCRIPTION**

Dynamic unidirectional microphone with a 3-pole XLR connection, equipped with internal anti-pop filter and ON/OFF switch with safety lock insert. MD 7600 can endure handling due to the optimum capsule suspension and it also works as professional microphone with excellent reproduction of speech and vocals.



## **FEATURES**

- Supercardioid dynamic microphone
- Anti-pop filter
- ON/OFF switch with lock
- Minimum handling noise
- 5 metre balanced and screened cable with 3 pole XLR connectors included
- Mic. holder for stands and soft bag included



## **TECHNICAL SPECIFICATIONS**

Microphone specifications	Type:	Dynamic
	Directivity:	Unidirectional
	Sensitivity:	-75 dB
	Frequency Response (-3dB):	60 Hz ÷ 16 kHz
	Output impedance (ohm):	500.00 ohm
Connections	Connectors:	XLR
Accessories	Cable included:	Yes
	Cable length (m):	5
Standard compliance	CE marking:	Yes
Physical specifications	Color:	Black
Size	Height:	180 mm / 7.09 inches
	Diameter:	48 mm / 1.89 inches
	Weight:	0.6 kg / 1.32 lbs
Shipping informations	Package Height:	242 mm / 9.53 inches
	Package Width:	70 mm / 2.76 inches
	Package Depth:	125 mm / 4.92 inches
	Package Weight:	0.8 kg / 1.76 lbs

## **PART NUMBER**


• 14115014

MD 7600

EAN 8024530005689




## **DRAWINGS**

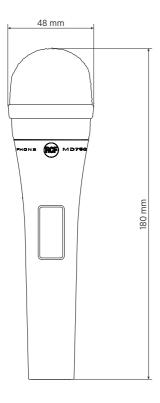


## **SCHEMATICS**


MICROPHONE XLR PLUG:



BALANCED AND SHIELDED MICROPHONE CABLE WITH XLR CONNECTORS:



## **FREQUENCY RESPONSE**

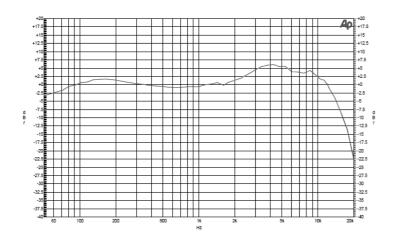

## **POLAR PATTERNS**

