




MX 3250/6

AMPLIFIED MASTER UNIT

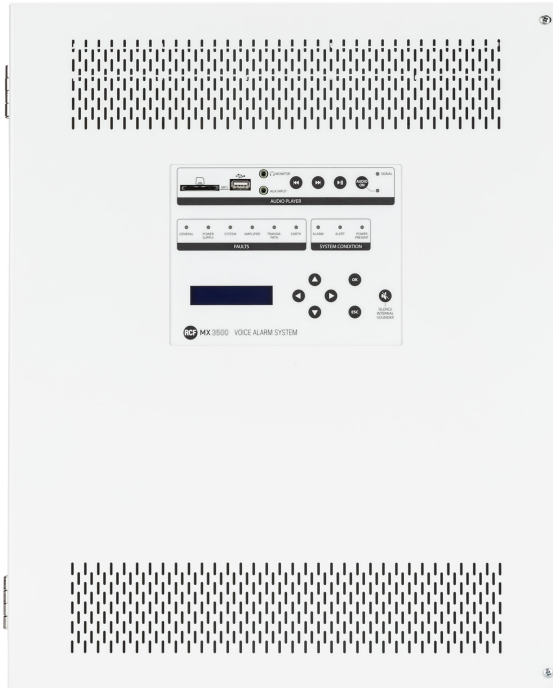




| | | | |
|--------------------|--|---------------------|-------------------|
| Description | MX 3250 is the master unit of the Voice Alarm system DXT 3000, dedicated to small and medium size applications where an EN 54-16 certified system is required. It is equipped with powerful and exceptionally reliable Class D power amplifiers, able to provide up to 250 W of total power. Depending on the model, it is able to serve up to 6 independent zones. Moreover, the spare power amplifier facility is also available. The internal power supply is certified EN 54-4, and the back-up batteries can be host inside the cabinet, making the system a complete and extremely compact solution. Moreover, the on-board DSP platform allows optimizing environmental equalization, maximizing voice intelligibility and background music performance. The system can be completed with emergency microphone consoles BM 3804, BM 3804FM and ME 3801, and the buttons extensions BE 3806, allowing to add live announcements functionality. | | |
| Features | <ul style="list-style-type: none">› 250 W total power› Up to 6 zones controlled› DSP platform on-board› Certified EN 54-16 and EN 54-4› Emergency messages on monitored SD card› Spare power amplifier facility› Integrated audio source on front panel› Wall mount or rack mount installation | | |
| Part Number | 17170184 MX 3250/6 | 220-240/115 V White | EAN 8024530012694 |



MX 3250/6

AMPLIFIED MASTER UNIT

Line Art 2D

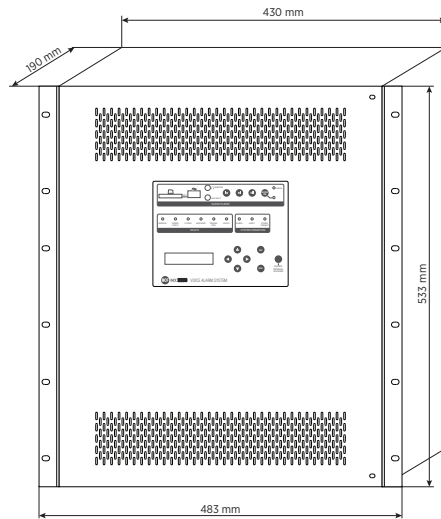

System specifications

TECHNICAL SPECIFICATIONS

| | |
|---|-------------------|
| Number of zones managed | 6 |
| Built-in power amplifier | Yes |
| Spare amplifier automatic change-over | Yes |
| Max number of consoles | 4 |
| Number of console buses | 1 |
| Number of simultaneous emergency audio channels | 1 |
| Max number of units connectable | 8 |
| Communication bus | Serial |
| Connection Cables | J-Type fire-rated |
| Integrated pre-recorded emergency messages | Yes |

Amplifier specifications

| | |
|--|----------------|
| Amplifier Class | D+ |
| Number of channels | 6 |
| Power output (@ 100 V) | 250 W RMS |
| A/B speakers line | Yes |
| Frequency Response (-3dB) | 80 Hz ÷ 16 kHz |
| Signal/noise rate ("A" weighted) | >98 dB |
| Distortion (THD+N) @ 1 kHz nominal power | <0.3 % |

Input section

| | |
|------------------------------|-----------------|
| Total number of inputs | 3 |
| Balanced | 3 |
| Mono | 3 |
| Line inputs | 2 |
| Line connectors | Euroblock, JACK |
| VOX | Yes |
| Paging inputs | 1 |
| Paging connectors | Euroblock |
| Paging command | Serial |
| Paging emergency | Yes |
| General Purpose Inputs (GPI) | 6 |
| Monitored GPI | 6 |
| Photo-coupled GPI | 6 |



MX 3250/6

AMPLIFIED MASTER UNIT

| | | |
|--------------------------------|-------------------------------|----------------------------------|
| Output section | Signal output number | 1 |
| | Signal output connectors | JACK |
| | Power output lines | 6 |
| | Power output connectors | Euroblock |
| | General Purpose Outputs (GPO) | 6 |
| Processing | DSP | Yes |
| | Tone controls | Yes |
| | High-pass filter | 20 Hz ÷ 500 Hz |
| Controls | Configuration | DIP switch, Front panel |
| | Chime tone | Yes |
| Protections | Cooling | Convection |
| | Short circuit | Yes |
| | Thermal | Yes |
| | DC | Yes |
| | Fuses | Yes |
| | VHF (Very High Frequencies) | Yes |
| Audio sources | USB pen drives | Yes |
| | SD card | Yes |
| Power requirement | Operating voltage | 220-240/115 V- 50/60Hz |
| | Voltage selection | Internal |
| | DC power | Yes |
| | DC power value | 24 V |
| | Power consumption | 400 W |
| Standard compliance | IP protection grade | IP 30 |
| | Safety agency | CE compliant |
| | EN54-16 certified | Yes |
| | EN54-4 certified | Yes |
| | CPR number | 0068-CPR-007/2015 |
| Physical specifications | Cabinet/Case Material | Metal |
| | Color | White |
| | Rack mounting | 19", 12U |
| Size | Height | 530 mm / 20.87 inches |
| | Width | 430 mm / 16.93 inches |
| | Depth | 190 mm / 7.48 inches |
| | Weight | 16.92 kg / 37.3 lbs |
| | | |
| | ACCESSORIES | |
| | 14380036 BE 3806 | EAN 8024530012120 |
| | 14322013 BM 3022 | Grey EAN 8024530007034 |
| | 14380028 BM 3804 | EAN 8024530012137 |
| | 14380037 BM 3804FM | Red - RAL 3000 EAN 8024530012885 |
| | 14322030 ME 3801 | White EAN 8024530015732 |
| Electronics | BATTERIES | |
| | 13360317 BATT 18AH 2X | EAN 8024530015923 |
| | BOARDS | |
| 12399049 IT 3010 | EAN 8024530016388 | |
| 13360344 MG 3006 | EAN 8024530013356 | |
| | END OF LINES | |
| | 17170176 EOL 3-9 | EAN 8024530011864 |
| Cables | CABLES | |
| | 12399047 CJ 428CAT | EAN 8024530016449 |