

# NX 915-A

## PROFESSIONAL ACTIVE SPEAKER

### DESCRIPTION

NX 915-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 15" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 131 dB SPL, distortion-free sound. Used stand-alone speaker for FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 915-A blends high-performance and reliability in a compact package. Blending RCF proprietary FiRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.



### FEATURES

- Up to 131 dB Sound Pressure Level
- 2100W Class-D Bi-Amplification
- 45-20000 Hz linear frequency response
- 1.75" Compression Driver
- 15" Woofer
- FiRPHASE zero degrees phase technology
- Bass Motion Control woofer excursion management

**TECHNICAL SPECIFICATIONS**

<b>Acoustical specifications</b>	Frequency Response:	45 Hz ÷ 20000 Hz
	Max SPL @ 1m:	131 dB
	Horizontal coverage angle:	100°
	Vertical coverage angle:	60°
<b>Transducers</b>	Compression Driver:	1 x 1.0", 1.75" v.c
	Woofer:	15", 2.5" v.c
<b>Input/Output section</b>	Input signal:	bal/unbal
	Input connectors:	XLR, Jack
	Output connectors:	XLR
	Input sensitivity:	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies:	1600 Hz
	Protections:	Thermal, RMS
	Limiter:	Soft Limiter
	Controls:	Linear, Boost, Stage, Volume
<b>Power section</b>	Total Power:	2100 W Peak
	High frequencies:	700 W Peak
	Low frequencies:	1400 W Peak
	Cooling:	Convection
	Connections:	VDE
<b>Standard compliance</b>	Safety agency:	CE compliant
<b>Physical specifications</b>	Cabinet/Case Material:	Plywood
	Hardware:	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear
	Handles:	1 x Each Side
	Pole mount/Cap:	Yes
	Grille:	Steel
	Color:	Black
<b>Size</b>	Height:	705 mm / 27.76 inches
	Width:	420 mm / 16.54 inches
	Depth:	451 mm / 17.76 inches
	Weight:	24.1 kg / 53.13 lbs
<b>Shipping informations</b>	Package Height:	751 mm / 29.57 inches
	Package Width:	506 mm / 19.92 inches
	Package Depth:	474 mm / 18.66 inches
	Package Weight:	26.6 kg / 58.64 lbs

**PART NUMBER**

- **13000690**

NX 915-A

115V


EAN 8024530019051

- **13000674**

NX 915-A

220-240V

EAN 8024530018979

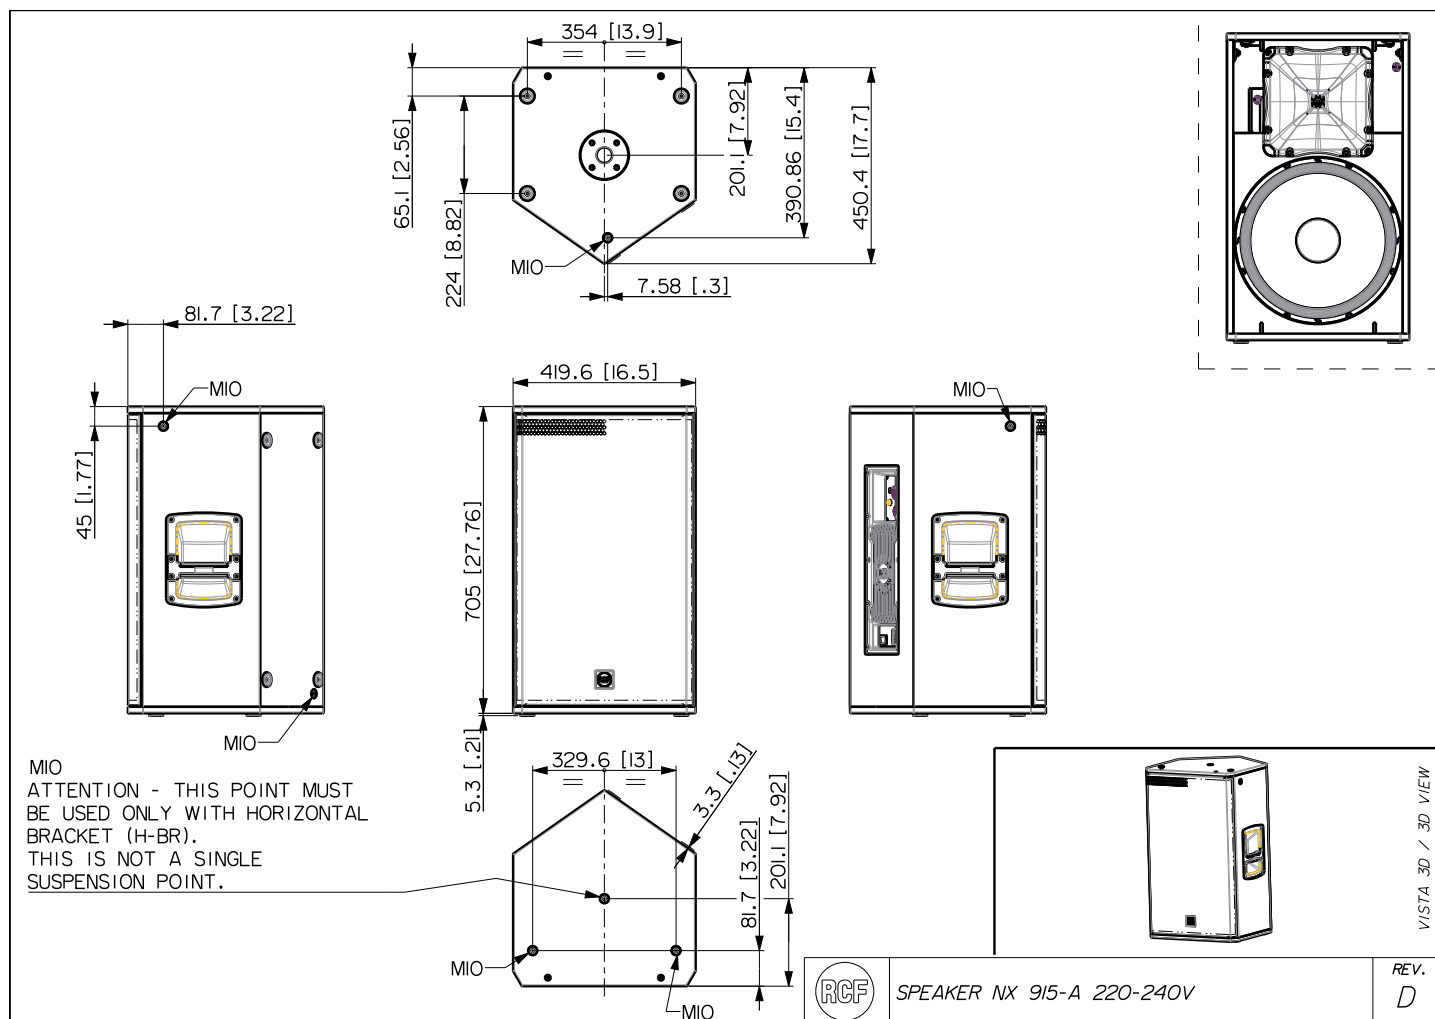

**ACCESSORIES**

AC PM-M20

PART NUMBER **13360067**  
EAN: 8024530014599



AC PMX POLE MOUNT M20

PART NUMBER **13360232**  
EAN: 8024530010058



AC PRO-FS PROFESS. LOCKING FLOOR STAND

PART NUMBER **13360109**  
EAN: 8024530006471



AC PRO-PM PROFESS. LOCKING POLE MOUNT

PART NUMBER **13360110**  
EAN: 8024530006488



COVER CVR NX 915

PART NUMBER **13360497**  
EAN: 8024530019501



HORIZONTAL BRACKET H-BR 2X COMPACT C 45

PART NUMBER **13360493**  
EAN: 8024530019938

INSTALL.PLT 2X PLATE H-BR NX 910-12-15

PART NUMBER **13360506**  
EAN: 8024530020057



KIT EYEBOLT 4 X

PART NUMBER **13360031**  
EAN: 8024530018870