



S 8018 II

HIGH-EFFICIENCY SUBWOOFER



Descripción

The S8018 II high-efficiency subwoofer is the ideal low-frequency extension to complement RCF installed systems. The low-frequency transducer is a hypervented vented, high excursion RCF Precision 18" woofer with a 4" inside/outside voice coil to minimize power compression and extend the life of the product. Using bass-reflex loading the subwoofer design ensures an efficient acoustic response down to 30 Hz. The Baltic birch plywood enclosure is painted with black, heavy duty, textured epoxy. The front is protected by a strong powder coated metal grille. The cabinet features two Neutrik Speakon™ connectors in a recessed input plate. A M20 pole mount adaptor is provided on the top of the cabinet, integrated hand carry points on the cabinet sides.

Características

- › 18" high-efficiency 4" voice-coil woofer with Inside/Outside Coil Technology
- › 137 dB maximum sound pressure level
- › Response down to 30 Hz
- › Rectangular box enclosure with protective metal grille
- › 35 mm standard pole mount in top section of cabinet
- › Baltic Birch cabinet painted with black, heavy duty, textured epoxy
- › Integrated hand carry points

Código De Artículo

13000390 S 8018 II

8ohm

Black

EAN 8024530010775


Especificaciones

Products are continually improved. All specifications are therefore subject to change without notice.




S 8018 II

HIGH-EFFICIENCY SUBWOOFER



Line Art 2D

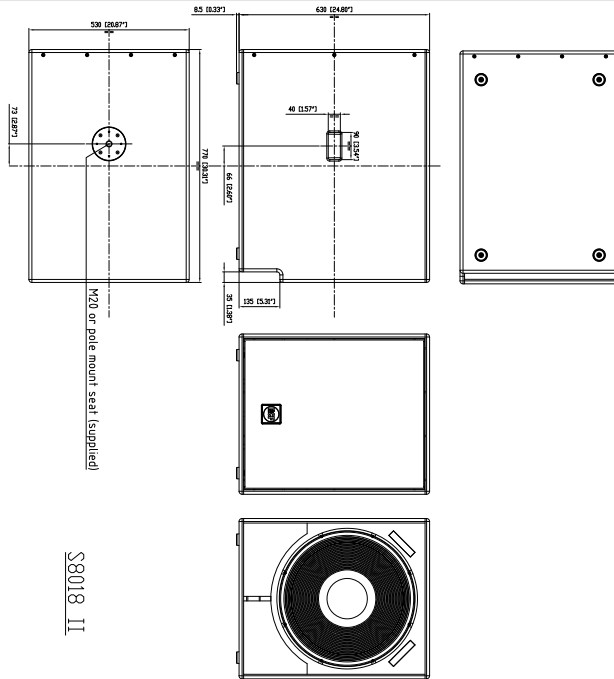

ESPECIFICACIONES

Especificaciones acusticas	Respuesta en frecuencia (-10 dB)	30 Hz ÷ 200 Hz
	SPL máx. a 1 m	137 dB
	Sensibilidad del sistema	100 dB
Sección de potencia	Amplification	Full Range
	Impedancia nominal	8 ohm
	Manejo de potencia	1500 W
	Manejo de potencia pico	6000 W PEAK
Transductores	Altavoz de bajos	18" neo, 4.0" v.c
Sección de entrada/salida	Conectores de entrada	Speakon® NL4
	Conectores de salida	Speakon® NL4
Cumplimiento estándar	Safety agency	CE compliant
Especificaciones físicas	Material del gabinete/de la caja	Baltic birch plywood
	Manijas	Integrated hand carry points
	Montaje en barra/tapa	M20 thread
	Rejilla	Metal
	Color	Black
Tamaño	Altura	639 mm / 25.16 inches
	Ancho	530 mm / 20.87 inches
	Profundidad	770 mm / 30.31 inches
	Peso	43 kg / 94.8 lbs