TTP 5-A

POINT SOURCE ARRAY

Description

The TTP5-A is a high power, two way, active array module engineered to deliver high fidelity output for use in indoor and outdoor medium and large spaces. The system is designed to create horizontal or vertical arrays with a constant curvature. The system is designed to be used for medium-small theatres to very large outdoor stadia and public spaces. The RCF Precision newly designed 4” compression driver loaded on a dedicated waveguide guarantees the exceptional sound projection and pattern control. The new woofer design represents the result of many dedicated years in developing new solutions using the best materials available on the market. The integration of two channels 1600 Watt digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency.

Features

- 1600 Watt, 2 way amplification
- 15" neo woofer, 4.0" v.c.
- 2.0" titanium dome neo c. driver, 4.0" v.c.
- 22.5° x 60° precision waveguide
- 96 Khz, 32 bit DSP processing
- Maximum output, perfect audio fidelity
- Tour grade cabinet and mechanics
- RDNet Onboard

Part Number

13000380 TTP 5-A	220-240 V	Black	EAN 8024530010522
13000384 TTP 5-A	115 V	Black	EAN 8024530010515

TTP 5-A

POINT SOURCE ARRAY

Line Art 2D

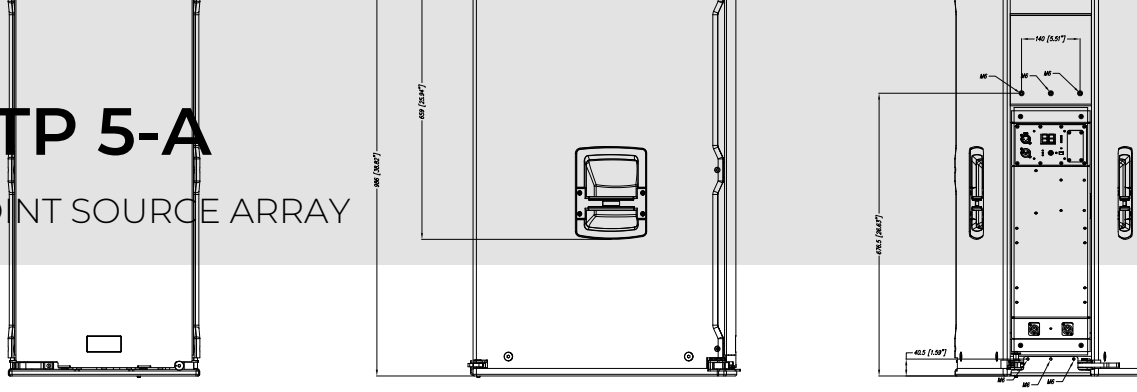

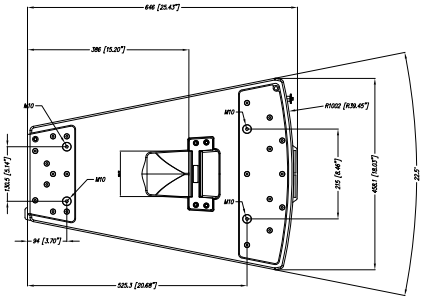

TTP5-A

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz - 20000 Hz
	Max SPL @ 1m	138 dB
	Horizontal coverage angle	23°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.4'' neo, 4.0'' v.c
	Woofer	1 x 15'' neo, 4.0'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	550 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Gain reduction, RDNet local setup/bypass, Time Delay, Presets (Linear, Close, Far)
	RDNet	Onboard
Power section	Total Power	3200 W Peak, 1600 W RMS
	High frequencies	1000 W Peak, 500 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant

TTP 5-A

POINT SOURCE ARRAY

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	Cluster Mechanics
	Handles	2 side, 1 top , 1 Bottom
	Grille	Steel
	Color	Black
Size / Weight	Height	986 mm / 38.82 inches
	Width	458 mm / 18.03 inches
	Depth	646 mm / 25.43 inches
	Weight	66 kg / 145.5 lbs

ACCESSORIES

Rigging / Mounting	**FLY BARS**		
13360252	FL-B H 6X TTP 5	Black	EAN 8024530018177
13360284	FL-B H TTP 5	Black	EAN 8024530018160
13360249	FL-B V TTP 5	Black	EAN 8024530018191
	LIFTING BRACKETS HORIZONTAL		
13360251	H-PLATE TTP 5 2X	Black	EAN 8024530018535
	POLE MOUNT KITS		
13360067	PM-KIT M20	Black	EAN 8024530014599
	SUSPENSION CHAINS		
13360129	HOIST SPACING CHAIN CH 001	Black	EAN 8024530020774
Protections	**COVERS**		
13360250	CVR TTP 5	Black	EAN 8024530015701
	RAIN PROTECTIONS		
13360316	RP 1X TTP 5	Black	EAN 8024530012526
Transportation	**KART WITH WHEELS**		
13360248	KRT-WH TTP 5	Black	EAN 8024530018603
Cables	**CABLES**		
12399019	CBL ETHERCON TO XLR F 0.2M	Black	EAN 8024530013882
12399020	CBL ETHERCON TO XLR M 0.2M	Black	EAN 8024530013899
	CABLES KIT		
13360102	AC XLR 3M3F		EAN 8024530006402
12399016	CBL ETHERCON 0.7M	Black	EAN 8024530013844
12399017	CBL ETHERCON 1.5M	Black	EAN 8024530013851
12399035	CBL ETHERCON 3M	Black	EAN 8024530013868
12399018	CBL ETHERCON 5M	Black	EAN 8024530013875
12399023	CBL LK 25 MULTIPIN 10M	Black	EAN 8024530013837
12399022	CBL LK 25 MULTIPIN 20M	Black	EAN 8024530013820
12399024	CBL LKS 19 ARRAY FANOUT	Black	EAN 8024530013905
12399026	CBL LKS 19 BREAKOUT	Black	EAN 8024530013929
12399027	CBL LKS 19 POWER 10M	Black	EAN 8024530013936
13360146	CBL LKS 19 POWER 20M		EAN 8024530013943

Cables	12399025	CBL LKS 19 SUB FANOUT	Black	EAN 8024530013912
	12399021	CBL LKS 25-2 FANOUT	Black	EAN 8024530013813
	13360145	CBL POWER BOX 6X	Black	EAN 8024530015534
	12399031	CBL POWERCON LINK 0.7M	Black	EAN 8024530013738
	12399030	CBL POWERCON LINK 1.5M	Black	EAN 8024530013721
	12399028	CBL POWERCON LINK 10M	Black	EAN 8024530013707
	12399029	CBL POWERCON LINK 5M	Black	EAN 8024530013714
	13360138	POWER CABLE X6 TTL 55-A		