BM 3001

PAGING MICROPHONE

Description

The BM 3001 Desktop Paging microphone allows to send announces toward a single zone and it is the ideal complement for the ES 3160 and ES 3323 receiver amplifier. It can also be used with other mixer-preamplifiers equipped Phantom Power (18 V - 48 V).

Features

› Plastic body with 300 mm gooseneck
› PTT button with LED
› Power supplied by 'Phantom' (18 ÷ 48 V dc)
› Ready for direct connection to amplifiers ES 3080, ES 3160-II, ES 3323-II, AM 2160, AM 2320, AM 2080, UP 2161, UP 2321, UP 2081.
› Chime activation on ES 3080, ES 3160-II, ES 3323-II, AM 2160, AM 2320, AM 2080
› Polyurethane foam wind screen
› 5 m connecting cable (with RJ 45 plugs) included

Part Number

14322008 BM 3001	Grey	EAN 8024530006228

Products are continually improved. All specifications are therefore subject to change without notice.

BM 3001

PAGING MICROPHONE

Line Art 2D

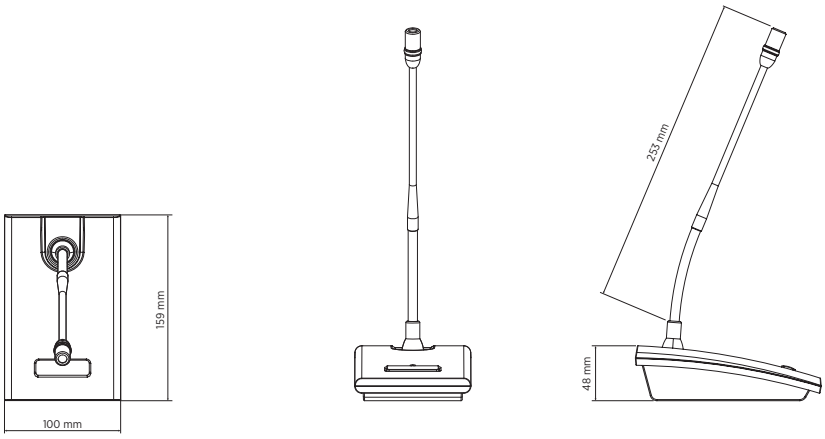

TECHNICAL SPECIFICATIONS

Microphone specifications	Type	Desktop paging microphone with electret capsule
	Directivity	Cardioid
	Sensitivity	-65 dB
	Frequency Response (-3dB)	50 Hz - 18 kHz
	Minimum load impedance (ohm)	470.00 ohm
	Nominal output voltage @3.3 kohm (mV RMS)	100.00 mV RMS
	Phantom power	Yes
	Phantom Power	18 V DC - 48 V DC
Console specifications	Console Type	Paging
	General call	Yes
	Number of zones	1
	LED indicators	Yes
Power requirement	Power consumption	2.80 mA
Connections	Connectors	RJ45
Functionalities	Smart PTT	Yes
Accessories	Cable included	Yes
	Cable length (m)	5
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Plastic
	Color	Grey

BM 3001

PAGING MICROPHONE

Size / Weight	Height	48 mm / 1.89 inches
	Width	100 mm / 3.94 inches
	Depth	159 mm / 6.26 inches
	Weight	0.73 kg / 1.61 lbs