



# CMR 60T

TWO-WAY CEILING MONITOR SPEAKER



## Description

CMR 60T is a multipurpose two-way in-ceiling speaker, suitable for a wide range of applications. Thanks to its elegant and discreet design and accurate details, CMR60T pairs any building's aesthetic.

The high-quality transducers, aligned in a coaxial configuration, guarantees a precise music reproduction of the entire frequency band and provides impressive sound pressure levels for such a compact enclosure.

Installation is easy with three long travel clamps.

The magnetic grille allows immediate access to the power selector on the front shell: the line transformer provides 80W full power on 70V and 100V constant voltage lines, and five different power levels.

## Features

- › 80W RMS power handling
- › 114 dB max SPL
- › 70 ÷ 20000 Hz frequency range
- › 130° constant directivity conical coverage angle
- › 6.5" high power woofer
- › 1" neodymium dome tweeter
- › Self extinguishing plastic body and metal backcan
- › Steel magnetic front grille
- › 4 pole EUROBLOCK connector (audio input and parallel link output)
- › 5 different power levels selectable

## Part Number

13100045 CMR 60T W


White - RAL 9003 EAN 8024530017446



# CMR 60T

## TWO-WAY CEILING MONITOR SPEAKER

Line Art 2D

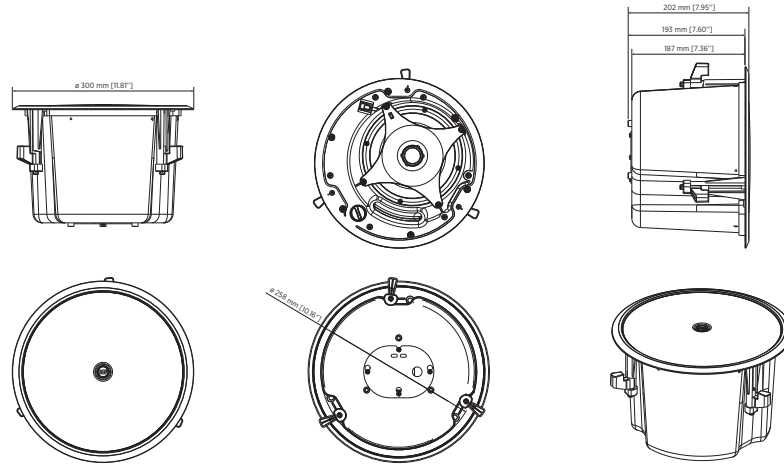

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response (-10dB)	70 Hz - 20000 Hz
	Max SPL @ 1m	114 dB
	Coverage angle	130°
	System Sensitivity	89 dB
<b>Power section</b>	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	80 W RMS
	Peak Power Handling	320 W PEAK
	Protections	Bulb lamp
	Crossover Frequencies	2500
<b>Transducers</b>	Recommended Amplifiers	DMA 504, DMA 162, DMA 82, DMA 162P
	Dome Tweeter	1 x 1.0" neo, 1.0" v.c
<b>Input/Output section</b>	Woofer	1 x 6.5", 1.2" v.c
	Input connectors	Euroblock
	Output connectors	Euroblock
	Constant Voltage Transformer	70/100 V
	Power selection 1	80 W - 125 ohm
	Power selection 2	40 W - 250 ohm
	Power selection 3	20 W - 500 ohm
<b>Standard compliance</b>	Power selection 4	10 W - 1000 ohm
	Power selection 5	5 W - 2000 ohm
	Safety agency	CE compliant, UL 1480A



# CMR 60T

## TWO-WAY CEILING MONITOR SPEAKER

### Physical specifications

Cabinet/Case Material	ABS
Hardware	Steel backcan
Grille	Steel
Color	White - RAL 9003
Depth	202 mm / 7.95 inches
Recessed Depth	193 mm / 7.6 inches
Diameter	300 mm / 11.81 inches
Cut out diameter	260 mm / 10.24 inches
Weight	4.5 kg / 9.92 lbs

### Size / Weight

### ACCESSORIES

### Rigging / Mounting

#### FLYING BRACKETS

13360490	MUD RING 4X CMR	EAN 8024530019396
13360489	TILE BRIDGE 4X CMR	EAN 8024530019389

#### GRILLE

13360492	GRILLE KIT 4X CMR B	Black - RAL 9005	EAN 8024530019402
----------	---------------------	------------------	-------------------