

PL 6X

COAXIAL CEILING SPEAKER

DESCRIPTION

PL 6X is a ceiling speakers featuring elegant and innovative design that can be flushmounted in false ceilings or panels. Incorporating a 6" coaxial woofer with a 1" tweeter placed on a bridge support. PL 6X is equipped with a line transformer that enables direct connection to constant voltage systems at 70 V or 100 V. The multiple sockets on the transformer make possible to select the output power from among several values. Installation is quick and easy thanks to a special three-hook system that avoids the need for using screws and pallet or other attachment elements.



FEATURES

- 6" woofer with 1" dome tweeter
- Power selectable (70 V / 100 V): 12 W 6 W 3 W 1.5 W
- 92 dB sensitivity
- Colour white RAL 9003 and black RAL 9005
- Plastic frame UL 94 VO, aluminium grille

Rev. P Last update: 04/03/2024



TECHNICAL SPECIFICATIONS

Frequency Response (-10dB)	70 Hz ÷ 20000 Hz
Acoustical specifications Frequency Response (-10dB) Max SPL @ 1m	106 dB
Coverage angle	100°
System Sensitivity	92 dB
Amplification	Full Range
Power Handling	12 W RMS
Peak Power Handling	48 W PEAK
Recommended Amplifiers	DMA 504, DMA 162, DMA 82, DMA 162P, ES 2160, ES 3080, AM 2320, AM 2160, AM 2080, AM 1125, UP 8504, UP 8502, UP 8501, UP 2321, UP 2162
Dome Tweeter	1.0"
Woofer	6.0"
Input connectors	Screw Terminals
Output connectors	Screw Terminals
Constant Voltage Transformer	70/100 V
Power selection 1	12 W - 833 ohm
Power selection 2	6 W - 1667 ohm
Power selection 3	3 W - 3333 ohm
Power selection 4	1.5 W - 6667 ohm
IP protection grade	IP 44
Safety agency	CE compliant
Hardware	Plastic Material
Color	White - RAL 9003, Black - RAL 9005
Depth	73 mm / 2.87 inches
Recessed Depth	66 mm / 2.6 inches
Diameter	204 mm / 8.03 inches
Cut out diameter	182 mm / 7.17 inches
Weight	0.78 kg / 1.72 lbs
Package Height	240 mm / 9.45 inches
Package Width	240 mm / 9.45 inches
Package Depth	110 mm / 4.33 inches
Package Weight	1.56 kg / 3.44 lbs
	Max SPL @ 1m Coverage angle System Sensitivity Amplification Power Handling Peak Power Handling Recommended Amplifiers Dome Tweeter Woofer Input connectors Output connectors Constant Voltage Transformer Power selection 1 Power selection 2 Power selection 3 Power selection 4 IP protection grade Safety agency Hardware Color Depth Recessed Depth Diameter Cut out diameter Weight Package Height Package Width Package Depth



PART NUMBER

· 13133042

PL 6X

White - RAL 9003

EAN 8024530004972

· 13100087


PL 6X B


Black - RAL 9005

EAN 8024530018467





DRAWINGS

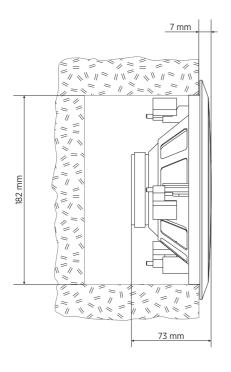









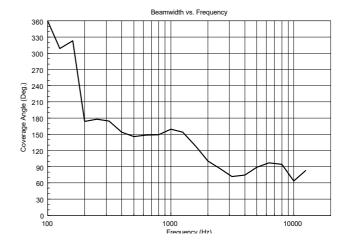


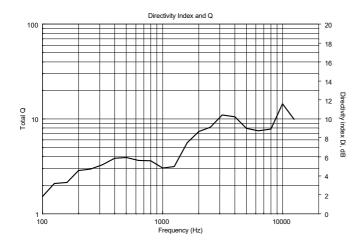









HORIZONTAL 1/3 POLAR PLOT
















A&E SPECIFICATIONS

The product shall be a ceiling speaker featuring elegant and innovative design that can be flush-mounted in false ceilings or panels, incorporating a coaxial 6" woofer with a 1" tweeter.

It shall be equipped with a line transformer that enables direct connection to either 70 V or 100 V constant voltage lines. Its transformer taps will allow to select the output power from among several values.

Installation shall be quick and easy thanks to a special three-hook system that avoids the need for using screws and pallet or other attachment elements.