


PLP 50EN

CEILING SPEAKER WITH PLASTIC FIRE DOME

DESCRIPTION

PLP 50EN is a ceiling speaker featuring a flameproof plastic back can, designed for recess installation into ceilings or panels. It is especially suitable for broadcasting alarm messages thanks to the highly intelligible sound reproduction and its resistance to high temperatures reached during fires. The terminal connection blocks, for input and output flameproof cables, are made of ceramic material. A thermal fuse protects the integrity of the line in case of heat affecting the speaker. Ground screw available (if needed). Cables inside speaker made using flameproof leads.

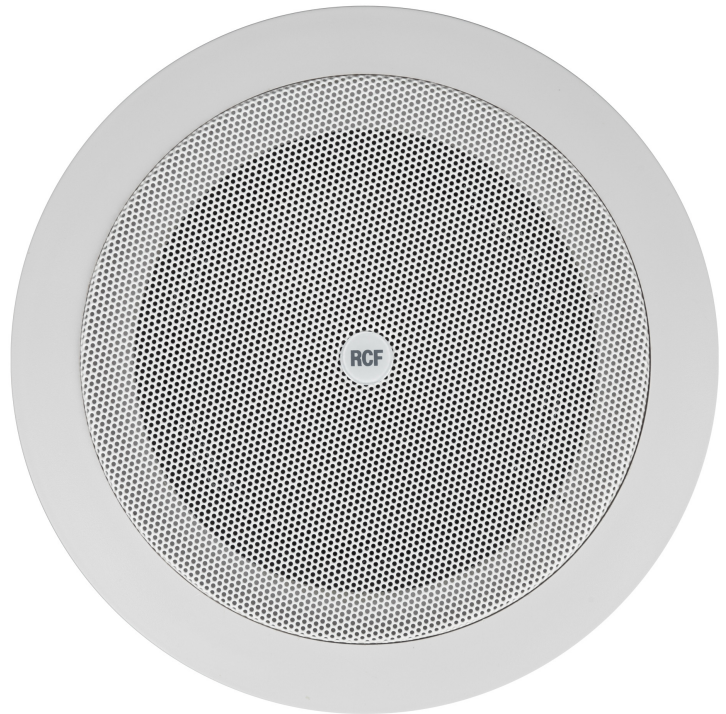

FEATURES

- 5" fullrange transducer.
- Power selectable (100 V): 6 W – 3 W – 1.5 W.
- 93 dB sensitivity.
- Colour white RAL 9016.
- Plastic frame and back can, steel grille.
- In/out ceramic terminal block.
- Thermal fuse protection.

TECHNICAL SPECIFICATIONS



Acoustical specifications	Frequency Response (-10dB)	130 Hz ÷ 15000 Hz
	Max SPL @ 1m	101 dB
	Max SPL @ 4m	89 dB
	Coverage angle	165°
	System Sensitivity	93 dB
	System Sensitivity 1W @ 4m	81 dB
Power section	Amplification	Full Range
	Power Handling	6 W
	Peak Power Handling	24 W PEAK
	Protections	Thermal fuse
	Recommended Amplifiers	DXT 3000, DXT 4000, DXT 7000
Transducers	Fullrange	1 x 5.0"
Input/Output section	Input connectors	Ceramic screw terminals
	Output connectors	Ceramic screw terminals
	Constant Voltage Transformer	100 V
	Power selection 1	6 W - 1667 ohm
	Power selection 2	3 W - 3333 ohm
	Power selection 3	1.5 W - 6667 ohm
Standard compliance	Safety agency	CE compliant
	EN54-24 certified	Yes
	CPR number	0068-CPR-051/2017
Physical specifications	Hardware	Plastic back cover
	Color	White - RAL 9016
Size	Depth	71 mm / 2.8 inches
	Recessed Depth	66 mm / 2.6 inches
	Diameter	175 mm / 6.89 inches
	Cut out diameter	149 mm / 5.87 inches
	Weight	0.66 kg / 1.46 lbs
Shipping information	Package Height	110 mm / 4.33 inches
	Package Width	190 mm / 7.48 inches
	Package Depth	180 mm / 7.09 inches
	Package Weight	0.66 kg / 1.46 lbs

PART NUMBER


- **13100008**

PLP 50EN


EAN 8024530014391



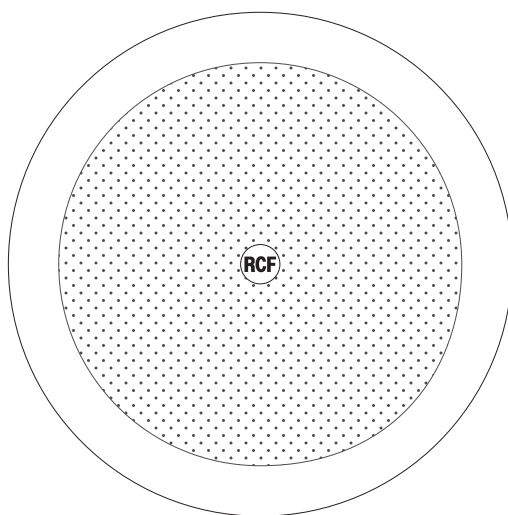
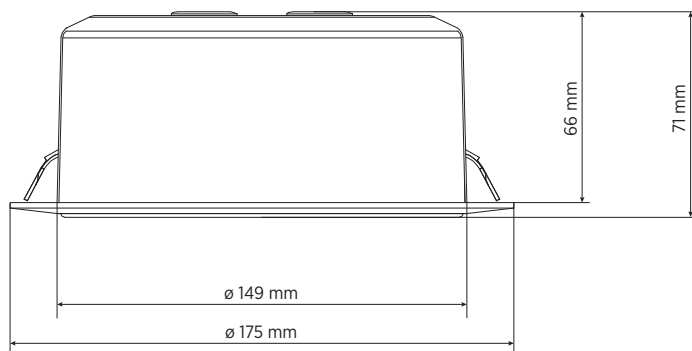
DRAWINGS

SCHEMATICS

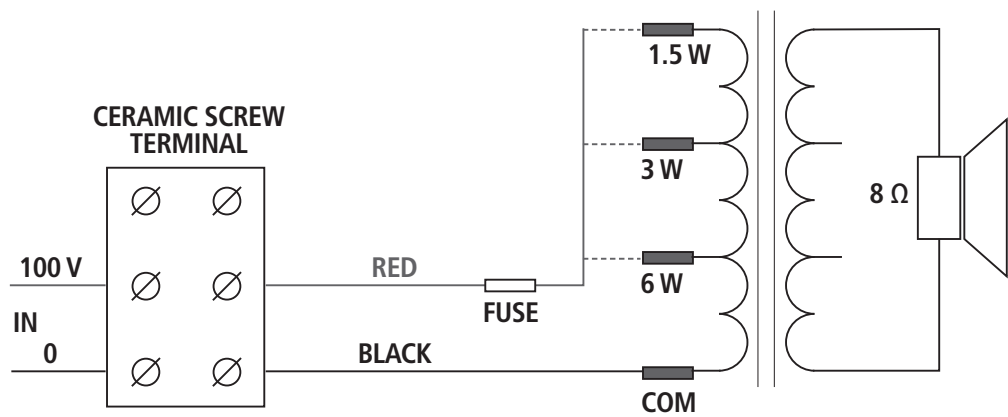


TAP (pins)	POWER (100 V)	POWER (70 V)
1	1.5 W	0.75 W
2	3 W	1.5 W
3	6 W	3 W

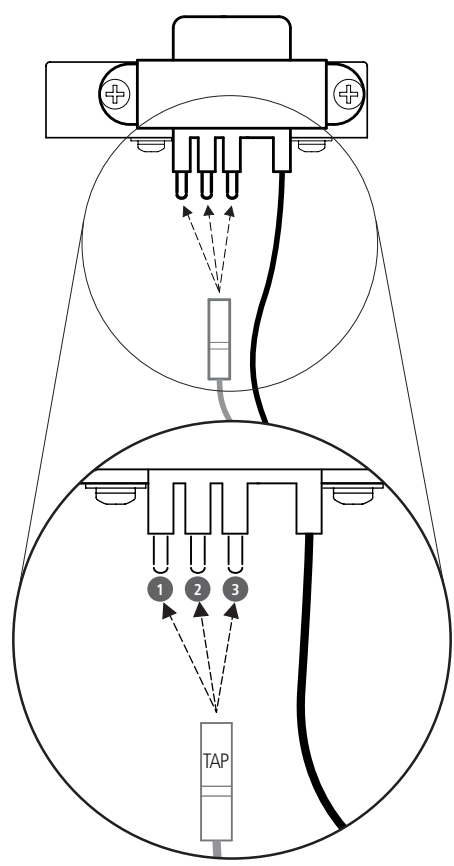


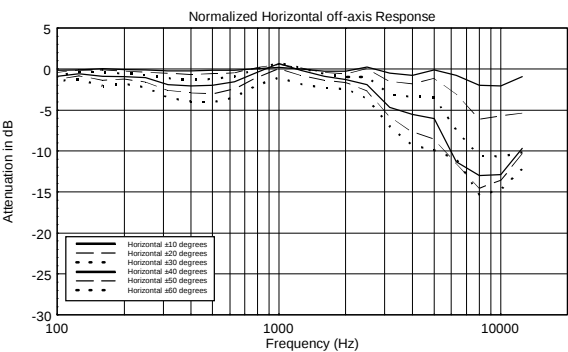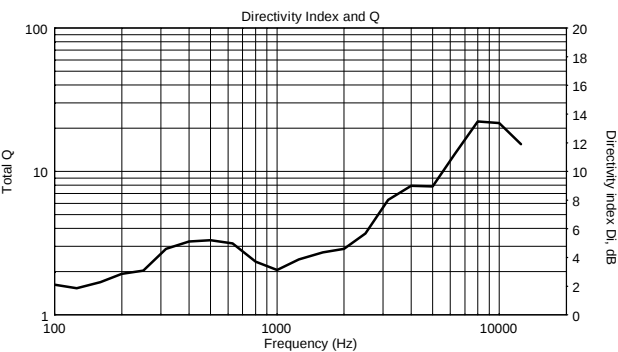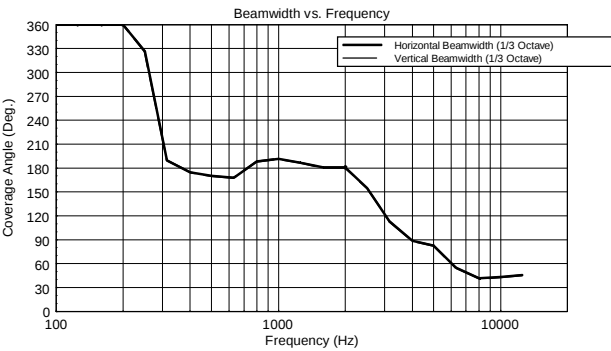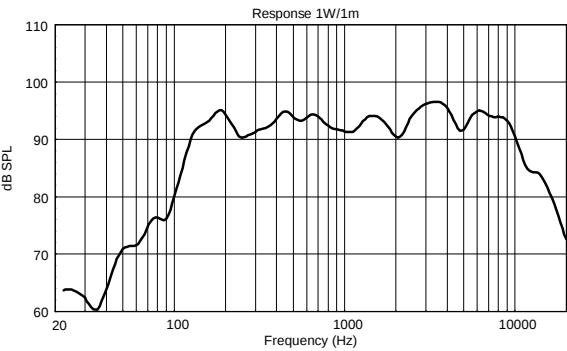


Horizontal 1/3 Octave Polars

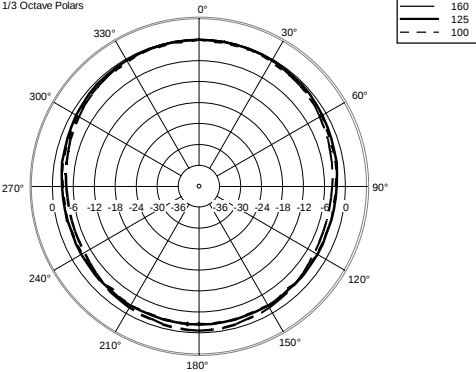


Horizontal 1/3 Octave Polars

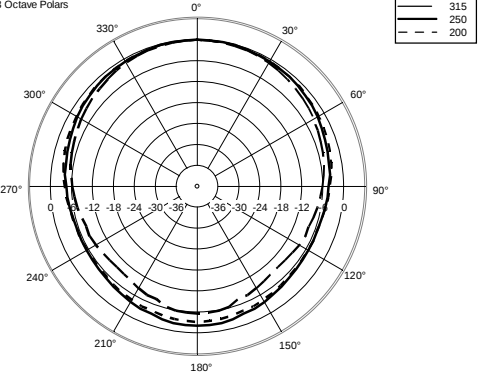


Horizontal 1/3 Octave Polars

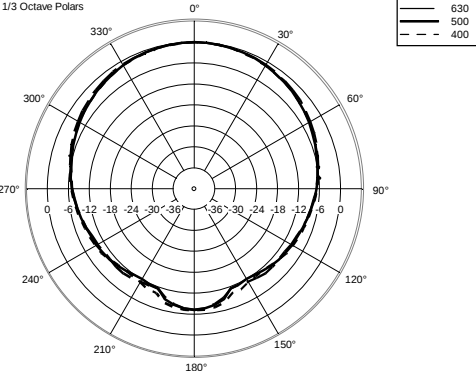


Horizontal 1/3 Octave Polars

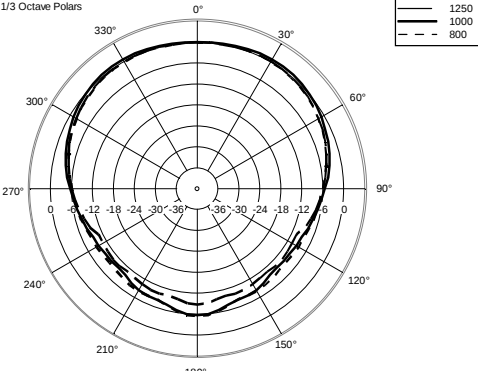


Horizontal 1/3 Octave Polars

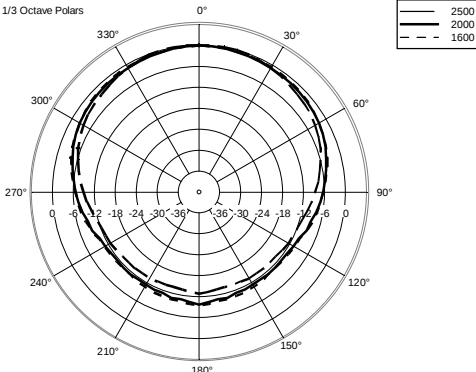


Horizontal 1/3 Octave Polars

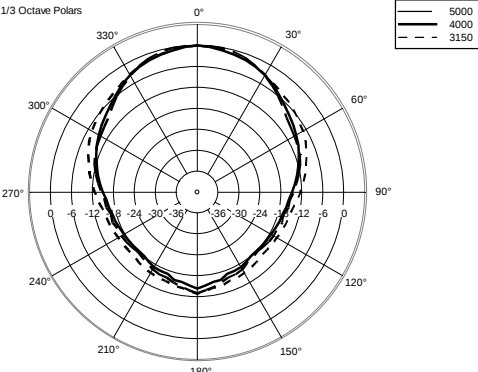

Horizontal 1/3 Octave Polars

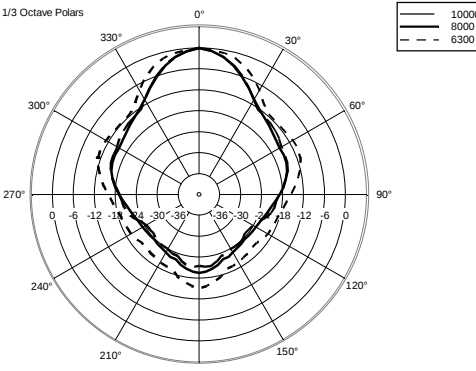

Horizontal One Octave Polars

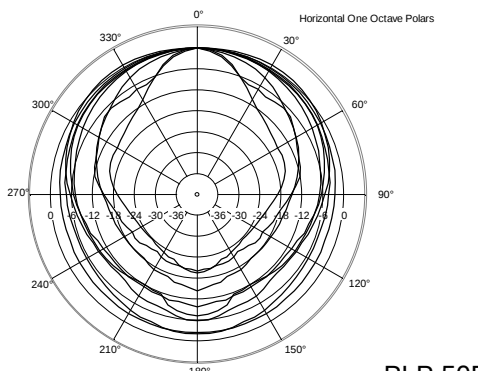



ACCESSORIES

A&E SPECIFICATIONS

The product shall be a ceiling speaker having a flameproof plastic backcan, designed for recess installation into ceilings or panels and especially suitable for broadcasting background music into commercial spaces, but also alarm messages thanks to the highly intelligible voice reproduction and the EN 54-24 certification.

It shall feature a plastic frame with steel grille.

The terminal connection blocks, for input and output flameproof cables, shall be made of ceramic material. A thermal fuse shall protect the line integrity in case of heat affecting the speaker.

NOTES

NO CAUTION is NECESSARY in case of ALERTED PERSON for AUDIO voltages up to 120V, when warning symbols are present near the connection terminals. In the case of AUDIO voltages up to 71V, it is not even necessary to put warning symbols.

No need of linking to earth metal parts of speakers equipped with transformers and connected to 70.7 V / 100 V outputs of power amplifiers that do not have any reference to earth (ref. EN 62368-1 item 4.3.2.2), unless specific local requirements.