



TRK PRO2

24-BIT 192kHz USB AUDIO INTERFACE



Description RCF TRK PRO2 hardware interface packs a robust and well-thought USB 2.0 studio-in-a-box with all the connectivity required for microphones, musical instruments, or line-level signals to a computer running macOS or Windows. The 2-channel internal linear preamp circuit allows the connection of 48V phantom-powered microphones and Hi-Z level instruments. Input signals can be routed to DAW (Digital Audio Workstation) at up to 24-bit, 192 kHz resolution; similarly, software monitoring and direct monitoring can be routed to the balanced outputs with variable mixing ratio. The interface can be connected to an amplifier and speakers, powered monitors, headphones, an analog mixer, or other analog audio devices.

- Features**
- › 2 In 2 Out USB 2.0 Bus-Powered Audio Interface
 - › Up to 24-Bit/192kHz
 - › 2 Mic and Instrument/Line Combo input
 - › High-Quality Preamps
 - › Balanced Output
 - › Independent Headphone Volume Control
 - › Zero-latency monitoring
 - › Independent Gain Control with Signal-Peak LED
 - › Perfect for RDNet Measures
 - › Rack Mount Ears included

Part Number 17100014 TRK PRO2


Black - RAL 9005 EAN 8024530019785



TRK PRO2

24-BIT 192kHz USB AUDIO INTERFACE

Line Art 2D

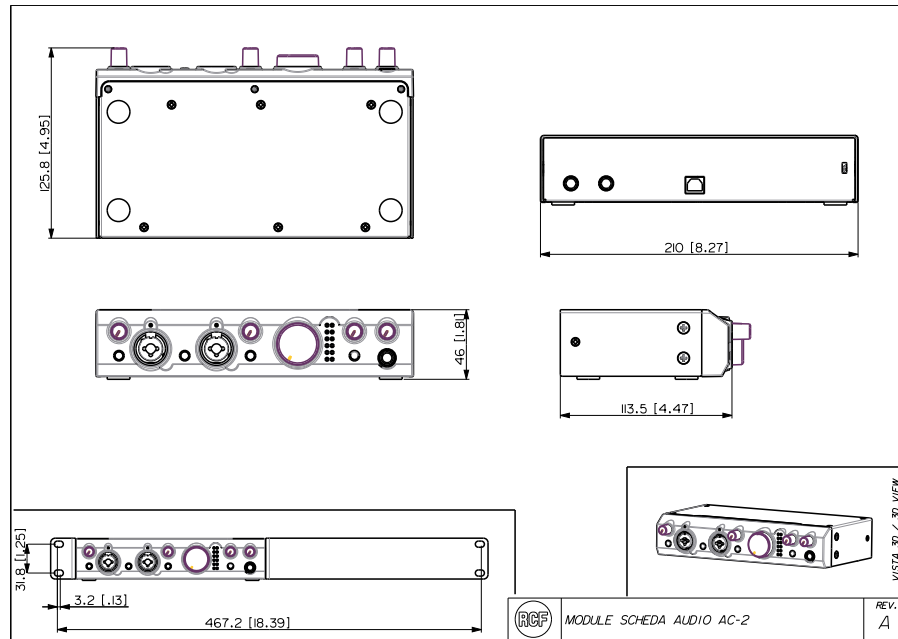

TECHNICAL SPECIFICATIONS

General specifications

MIC INPUT 1/2 (Balanced)	<p>Freq. Response: 20Hz-20kHz, +/-0.1dB THD+N: <0.0011%, -1dBFS, 20Hz-20kHz Noise EIN: < -120dB Dynamic Range: 107dB (A-weighted) Input Impedance: 3.5KOhm Gain Range: -9 dB ~ +47 dB Maximum Input Level: +9 dBu</p>
LINE INPUT 1/2 (Balanced)	<p>Freq. Response: 20Hz-20kHz, +/-0.1dB THD+N <0.0011%, -1dBFS, 20Hz ~ 20kHz Dynamic Range: 107 dB (A-weighted) Input Impedance: 15 kOhm Gain Range: -20 dB ~ +36 dB Maximum Input Level: +20 dB</p>
INSTRUMENT INPUT 1/2 (Unbalanced)	<p>Freq. Response: 20Hz-20kHz, +/-0.1dB THD+N: <0.0025%, -1dBFS, 20Hz-20k Input Impedance: 1M Ohm Gain Range: -10 dB ~ +46 dB Maximum Input Level: +10 dBu Dynamic Range: 107 dB (A-weighted)</p>
ANALOG OUTPUT (Balanced)	<p>Maximum Output Level 0dBFS=12dBu Freq. Response: 20 Hz-20 kHz, +/-0.2 THD+N: <0.0012%, -1dBFS, 20Hz-20 kHz Dynamic range: 107 dB (A-weighted)</p>
HEADPHONES OUTPUT (Unbalanced)	<p>Output Impedance: <10 Ohm Max Output Level: 500 Ohm - 114 mW</p>
SUPPORTED SAMPLE RATES	<p>44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz</p>
SUPPORTED BIT DEPTH	<p>16 Bit, 24 Bit</p>
Standard compliance	<p>Safety agency CE compliant</p>



TRK PRO2

24-BIT 192kHz USB AUDIO INTERFACE

Physical specifications	Cabinet/Case Material	Steel
	Hardware	Rack mount ears included
	Color	Black - RAL 9005
	Rack mounting	1/2 19", 1U
Size	Height	46 mm / 1.81 inches
	Width	210 mm / 8.27 inches
	Depth	125.8 mm / 4.95 inches
	Weight	0.85 kg / 1.87 lbs