

TT 2-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

DESCRIPTION

The TT2-A is the most flexible and powerful tool in its class. The incredible output and dynamics, the extreme linearity and fidelity makes the TT2-A a special product in its category. The TT2-A is the ideal compact two-way speaker for near field sound reinforcement, live sound and corporate events. The integration of the 1600 Watt, two channel, digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency. The speaker is equipped with a complete set of integrated rigging mechanics for rental or installation. Dedicated accessories to create clusters are available.



FEATURES

- 1600 Watt, 2 way amplification
- 12" neo woofer, 4" v.c.
- 1.4" titanium dome neo compression driver, 3.0" v.c.
- 90° x 50° precision waveguide
- 96 Khz, 32 bit DSP processing
- Maximum output, perfect audio fidelity
- Tour grade cabinet and mechanics
- RDNet Ready

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz ÷ 20000 Hz
	Max SPL @ 1m	134 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	50°
Transducers	Compression Driver	1 x 1.4" neo, 3.0" v.c
	Woofers	1 x 12" neo, 4.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR
	Output connectors	XLR
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	750 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Gain reduction, RDNet local setup/bypass, Time Delay, Presets (Linear, Close, Far listening, High-pass), RDNet Ready
	RDNet	Ready
Power section	Total Power	3200 W Peak, 1600 W RMS
	High frequencies	1000 W Peak, 500 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Hardware	Installation/Rental fittings
	Handles	2 side
	Pole mount/Cap	Yes
	Color	Black
Size	Height	643 mm / 25.31 inches
	Width	372 mm / 14.65 inches
	Depth	470 mm / 18.5 inches
	Weight	34.4 kg / 75.84 lbs
Shipping information	Package Height	900 mm / 35.43 inches
	Package Width	580 mm / 22.83 inches
	Package Depth	490 mm / 19.29 inches
	Package Weight	37.8 kg / 83.33 lbs

PART NUMBER

- **13000382**

TT 2-A

115V







EAN 8024530010485

- **13000378**







TT 2-A









220-240V









EAN 8024530010454

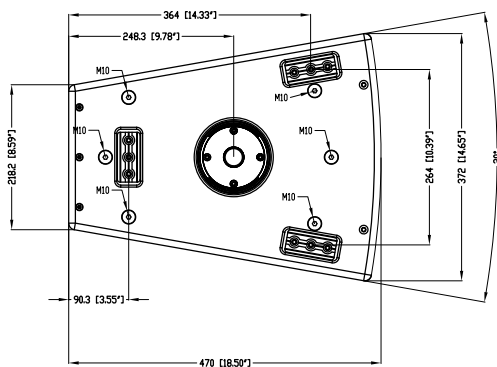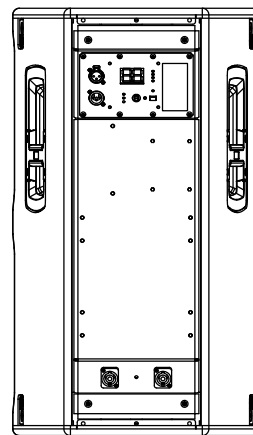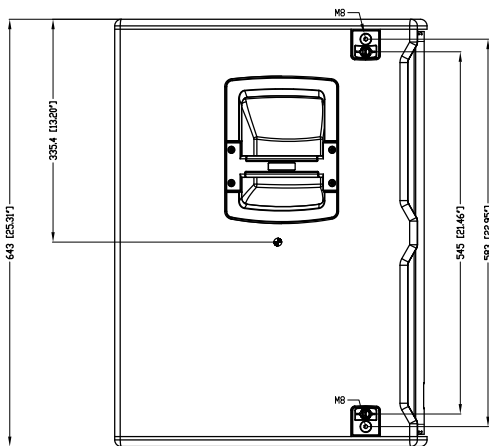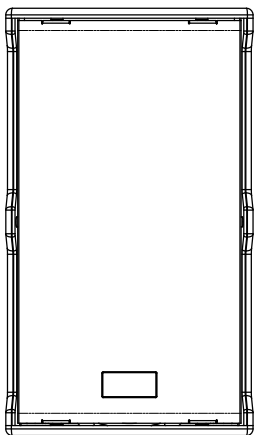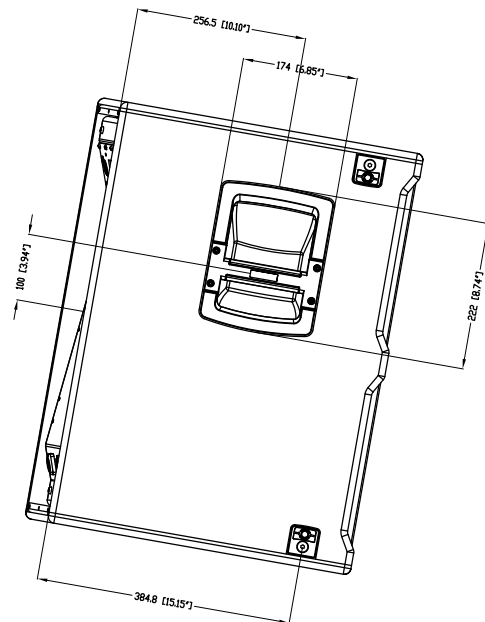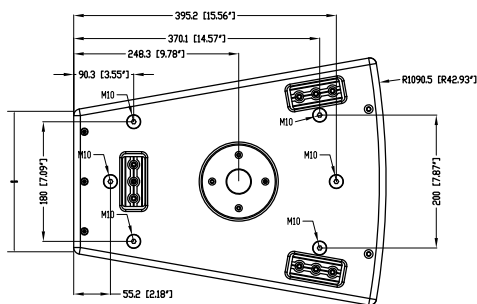

TT2-A

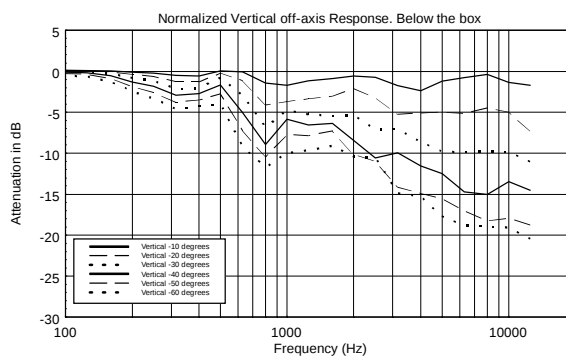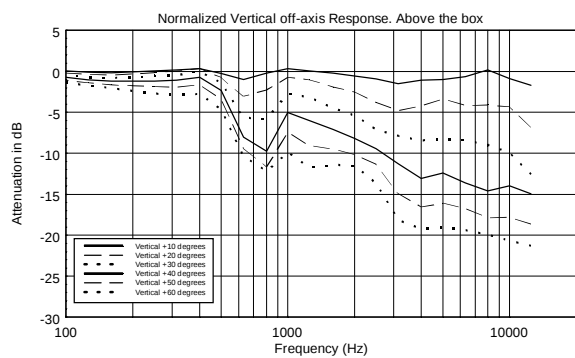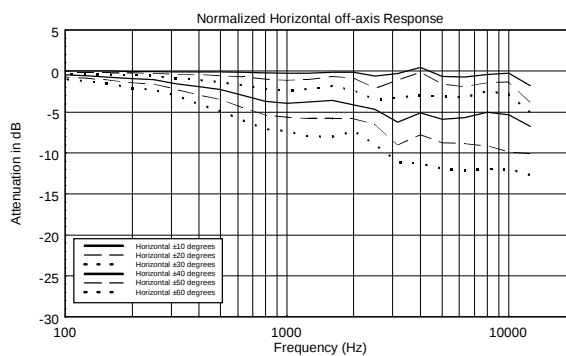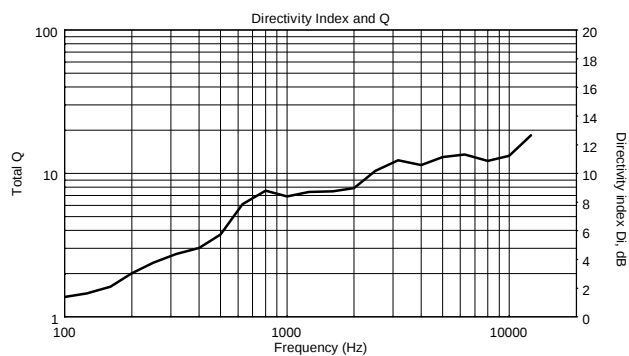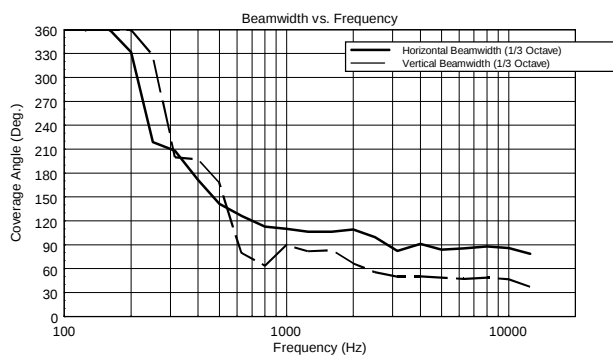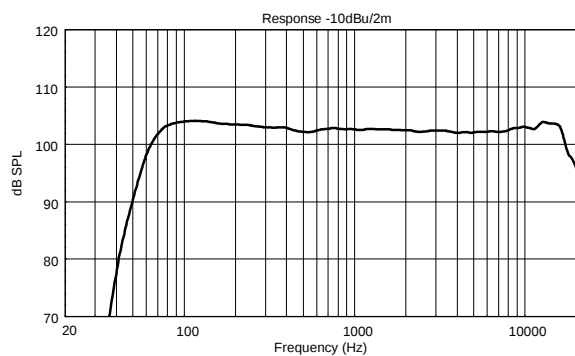

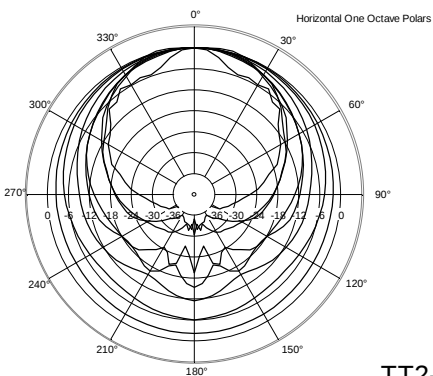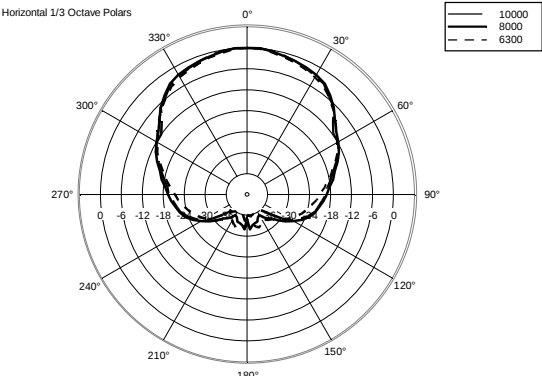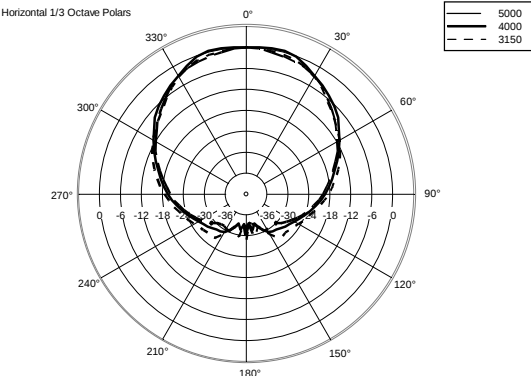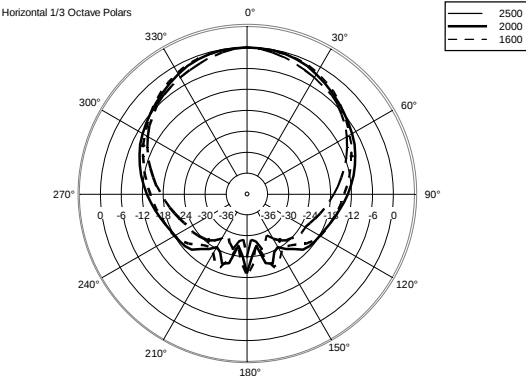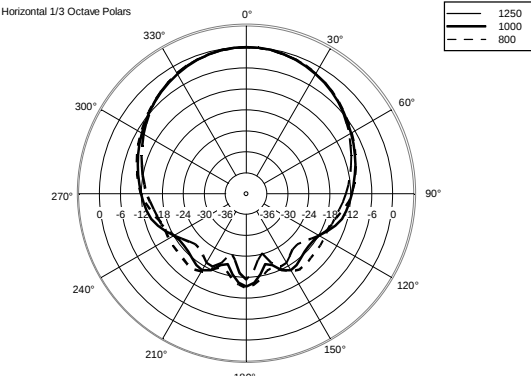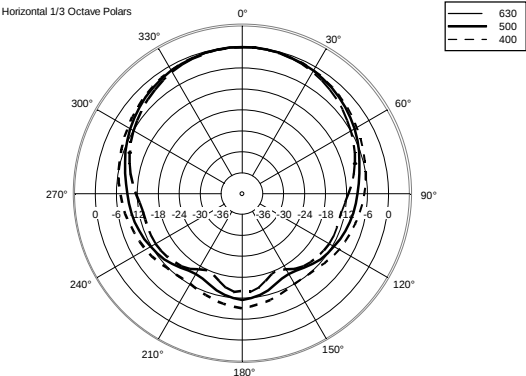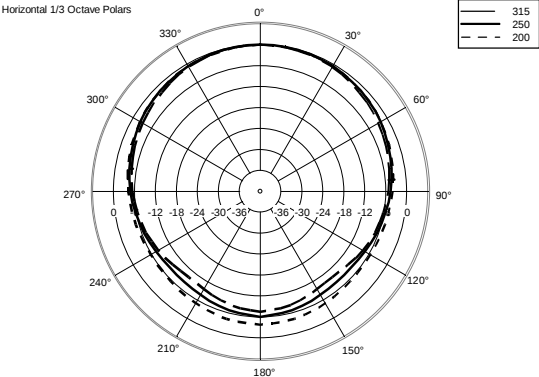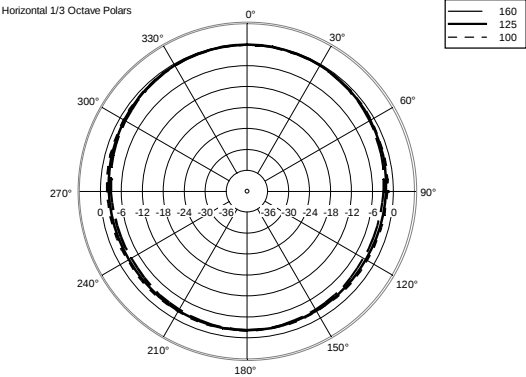

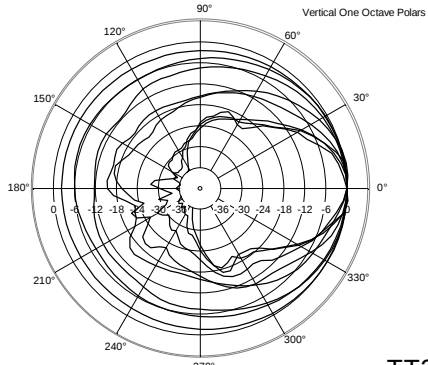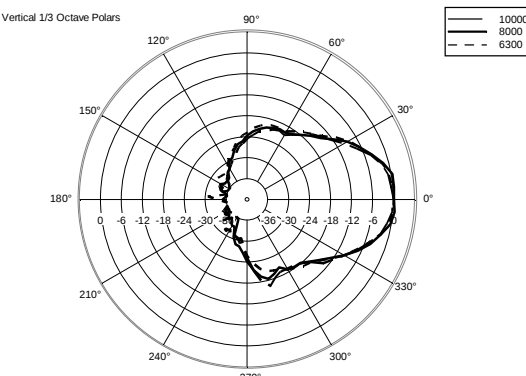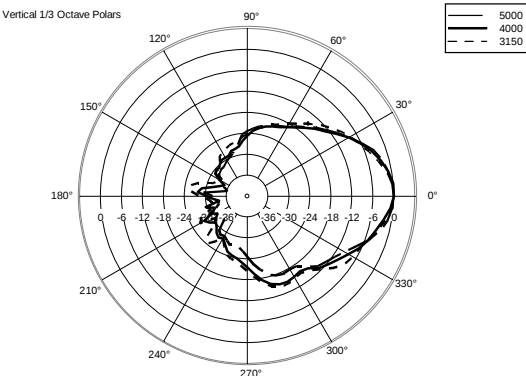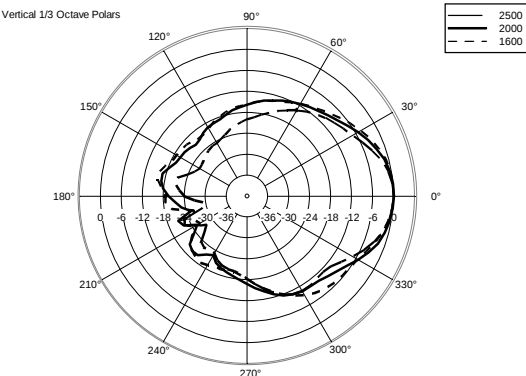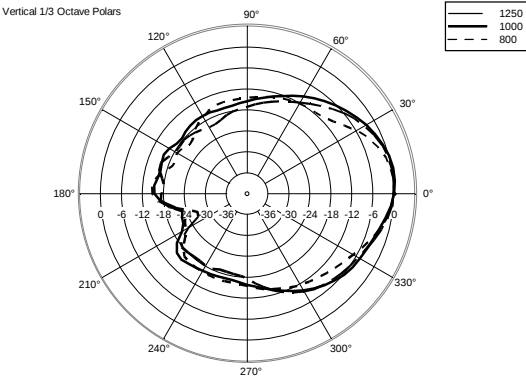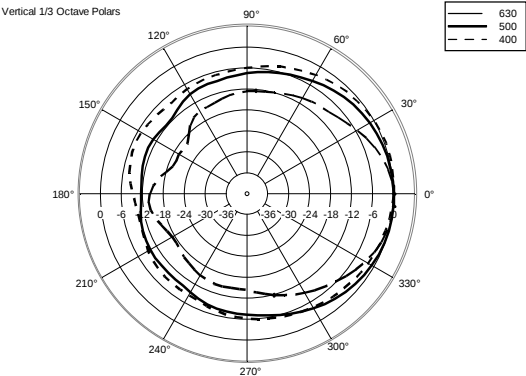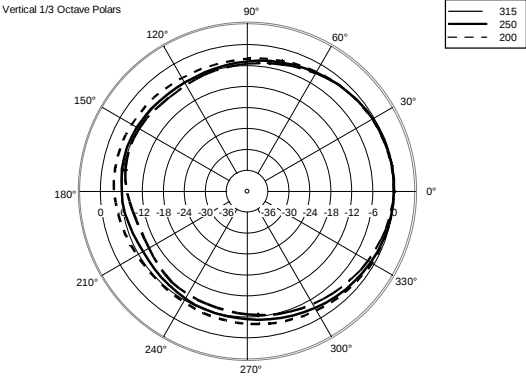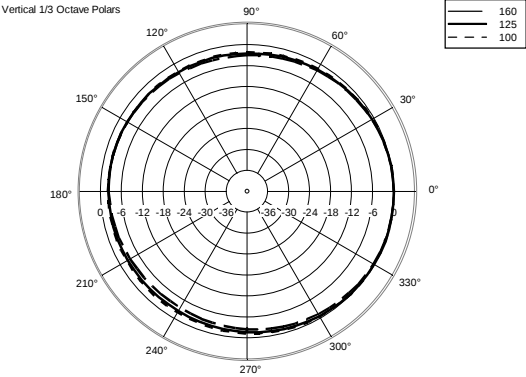

ACCESSORIES

AC PMA - POLE MOUNT

PART NUMBER **13360034**
EAN: 8024530007713

AC PMX POLE MOUNT M20

PART NUMBER **13360232**
EAN: 8024530010058

AC PRO-FS PROFESS. LOCKING FLOOR STAND

PART NUMBER **13360109**
EAN: 8024530006471

AC PRO-LF PROFESSIONAL LOCKING FLANGE

PART NUMBER **13360111**
EAN: 8024530006495

AC PRO-PM PROFESS. LOCKING POLE MOUNT

PART NUMBER **13360110**
EAN: 8024530006488

AC RDNET IN/OUT PLUG

PART NUMBER **13360176**
EAN: 8024530015060

AC XLR-3M3F XLR CONN. 3MALE3FEMALEXCABLE

PART NUMBER **13360102**
EAN: 8024530006402

COVER CVR TT 2

PART NUMBER **13360245**
EAN: 8024530013806

DOUBLE STUD 4X

PART NUMBER **13360030**
EAN: 8024530020231



END BRACKET FOR CHAIN 2X AC TT2 END PL

PART NUMBER **13360262**
EAN: 8024530018573



HORIZONTAL BRACKET H-BR TT 2

PART NUMBER **13360259**
EAN: 8024530016531



INSTALLATION BRACKET 2X AC TT2 PLATE

PART NUMBER **13360261**
EAN: 8024530018559



KIT EYEBOLT 4 X

PART NUMBER **13360031**
EAN: 8024530018870



POLE MOUNT KIT PM-KIT M20

PART NUMBER **13360067**
EAN: 8024530014599



SPEAKER CABINET FLOOR STAND-STEEL

PART NUMBER **13360035**
EAN: 8024530005030



VERTICAL BRACKET V-BR TT 2

PART NUMBER **13360260**
EAN: 8024530016869