



# TT 5-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER



### Description

Thanks to the powerful 4" compression driver, the large sized horn, the incredibly fast woofer, TT5-A offers the highest performance from a wide dispersion, active, 2 way system. High output and dynamics, extreme linearity and fidelity makes the TT5-A a unique product in its category. The TT5-A is the ideal professional two-way speaker for mid field and near field sound reinforcement, live performance and events. The RCF Precision newly designed 4" compression driver guarantees the exceptional sound projection and pattern control. The integration of the 1600 Watt, digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency. The speaker is equipped with a complete set of integrated rigging mechanics for rental or installation. Dedicated accessories to create clusters are available.

### Features

- › 1600 Watt, 2 way amplification
- › 15" neo woofer, 4" v.c.
- › 1.4" titanium dome neo compression driver, 4.0" v.c.
- › 90° x 50° precision waveguide
- › 96 Khz, 32 bit DSP processing
- › Maximum output, perfect audio fidelity
- › Tour grade cabinet and mechanics
- › RDNet Ready


### Part Number

13000379 TT 5-A	220-240 V	Black	EAN 8024530010447
13000383 TT 5-A	115 V	Black	EAN 8024530010508



# TT 5-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

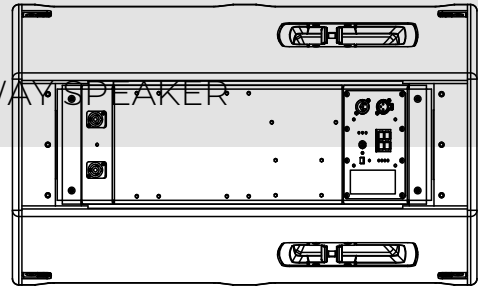

Line Art 2D

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz - 20000 Hz
	Max SPL @ 1m	136 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	50°
<b>Transducers</b>	Compression Driver	1 x 1.4" neo, 4.0" v.c
	Woofer	1 x 15" neo, 4.0" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
<b>Processor section</b>	Crossover Frequencies	650 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Gain reduction, RDNet local setup/bypass, Time Delay, Presets (Linear, Close, Far listening, High- Pass), RDNet Ready
<b>Power section</b>	RDNet	Onboard
	Total Power	3200 W Peak, 1600 W RMS
	High frequencies	1000 W Peak, 500 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
<b>Standard compliance</b>	Connections	Powercon IN/OUT
	Safety agency	CE compliant



# TT 5-A

## ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Physical specifications	Cabinet/Case Material	Baltic birch plywood	
	Hardware	Installation/Rental fittings	
	Handles	2 side	
	Grille	Steel	
	Color	Black	
Size / Weight	Height	735 mm / 28.94 inches	
	Width	444 mm / 17.48 inches	
	Depth	529 mm / 20.83 inches	
	Weight	42.5 kg / 93.7 lbs	
<b>ACCESSORIES</b>			
Rigging / Mounting	13360111 AC PRO-LF	Black	EAN 8024530006495
	13360035 AC S260		EAN 8024530005030
	13360246 CVR TT 5	Black	EAN 8024530014056
	<b>END BRACKETS</b>		
	13360268 END-PLATE TT 5 2X	Black	EAN 8024530018566
	<b>FLOOR STANDS</b>		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	<b>FLYING BRACKETS</b>		
	13360030 AC DS 4X		EAN 8024530020231
	13360031 AC EB 4X		EAN 8024530018870
	<b>HORIZONTAL BRACKETS</b>		
	13360265 H-BR TT 5	Black	EAN 8024530016524
	<b>INSTALLATION PLATES</b>		
	13360267 PLATE TT 5 2X	Black	EAN 8024530018542
	<b>POLE MOUNT KITS</b>		
13360034 AC PMA		EAN 8024530007713	
13360232 AC PMX		EAN 8024530010058	
13360110 AC PRO-PM	Black	EAN 8024530006488	
13360067 PM-KIT M20	Black	EAN 8024530014599	
<b>VERTICAL BRACKETS</b>			
13360266 V-BR TT 5	Black	EAN 8024530016876	
Protections	<b>RAIN PROTECTIONS</b>		
	13360315 RP 1X TT 5	Black	EAN 8024530012519
Upgrade Kits	<b>CONNECTION PANELS</b>		
	13360176 RDNET IN-OUT PLUG		EAN 8024530015060
Cables	<b>CABLES KIT</b>		
	13360102 AC XLR 3M3F		EAN 8024530006402