


IT 4000

INPUT TRANSFORMER 100V TO 0 DB

DESCRIPTION

IT 4000 is an accessory that consists of a transformer that allows the connection of a 100V (or 70V) passive speakers line directly to the audio input (0 dBu) of an active speaker.

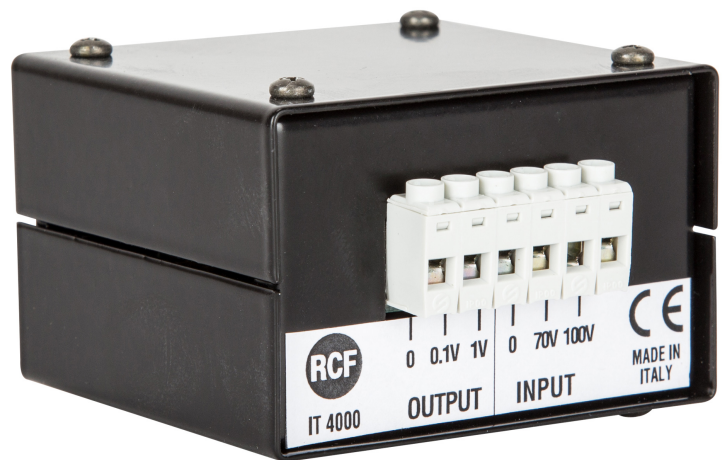

FEATURES

- Fixing of input and output cables on screw terminals.
- Metal box, colour black.

TECHNICAL SPECIFICATIONS

General specifications	Frequency response:	40 Hz - 16.000 Hz (\pm 1 dB)
	Input voltage:	100 V - 70 V
	Output voltage:	1 V - 0,1 V
	Distortion:	< 0,3%
	Input / Output connectors:	Screw terminals

Standard compliance	CE marking:	Yes
----------------------------	-------------	-----

Physical specifications	Cabinet/Case Material:	Metal
	Color:	Black

Size	Height:	42 mm / 1.65 inches
	Width:	65 mm / 2.56 inches
	Depth:	62 mm / 2.44 inches
	Weight:	0.1 kg / 0.22 lbs

Shipping informations	Package Height:	90 mm / 3.54 inches
	Package Width:	110 mm / 4.33 inches
	Package Depth:	100 mm / 3.94 inches
	Package Weight:	0.21 kg / 0.46 lbs

PART NUMBER

- **13360341**

IT 4000

EAN 8024530013301