

# NS 9048

## NOISE SENSOR

### DESCRIPTION

NS 9048 is a noise sensor that automatically adjust the volume level depending on the environment noise. It can be connected to any DXT 9000 power amplifiers and can act on every single system's zones, measured with a variable number of microphones (up to a maximum of 8). It is specifically addressed to all those applications with a significantly different people affluence during the day. Works both with for 100 V speakers and capsule microphones.



### FEATURES

- 8 microphones for each unit
- 2 units can be connected to a DXT 9000 amplifier
- Suitable for ceiling and rack installation
- PC software configuration

**TECHNICAL SPECIFICATIONS**

<b>General specifications</b>	Communication bus	Serial
	Units connection	J-Type fire rated
	Mic inputs	8
	Mic Phantom	+5 V DC
	Input connectors	Euroblock
	Configuration	PC software
	Operating voltage	24 V ÷ 48 V DC
<b>Standard compliance</b>	Safety agency:	CE compliant
	EN54-16 certified:	Yes
	CPR number:	0068-CPR-002/2014
<b>Physical specifications</b>	Cabinet/Case Material:	Metal
	Rack mounting:	1/2 19", 1U
<b>Size</b>	Height:	43 mm / 1.69 inches
	Width:	215 mm / 8.46 inches
	Depth:	123 mm / 4.84 inches
	Weight:	1 kg / 2.2 lbs
<b>Shipping information</b>	Package Height:	135 mm / 5.31 inches
	Package Width:	255 mm / 10.04 inches
	Package Depth:	59 mm / 2.32 inches
	Package Weight:	1.8 kg / 3.97 lbs


**PART NUMBER**

- **12399036**

NS 9048


EAN 8024530014193

DRAWINGS

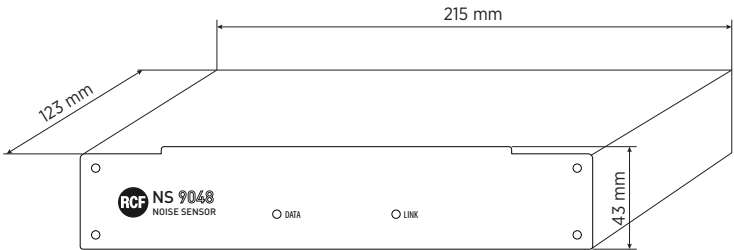


PANELS

Front panel

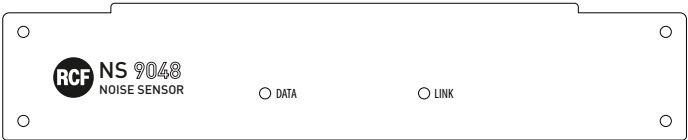


Rear panel

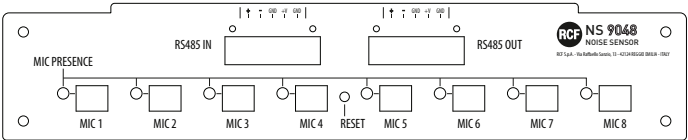


INSTALLATION

Ceiling



Rack (1U)

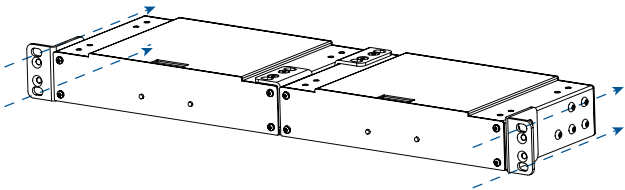

Angle

