


# TA1000 VSA

## 100V TRANSFORMER FOR VSA ACTIVE SPEAKERS

### DESCRIPTION

TA 1000 is an accessory that consists of a small printed circuit board with a transformer that allows the connection of a 100 V line (amplifier output) directly to the aux audio input (0 dBu) of an active speaker.

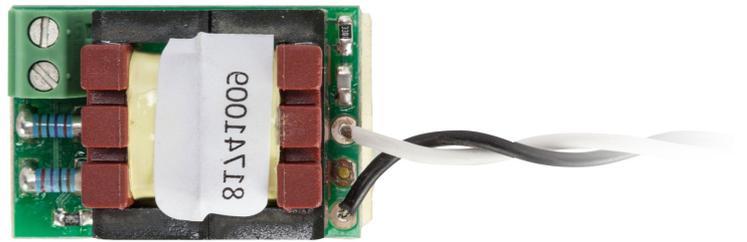

### FEATURES

- Compact installation within speaker's input panel

**TECHNICAL SPECIFICATIONS**

<b>General specifications</b>	Input voltage:	100 V - 70 V
	Output voltage:	0.1 ÷ 1 V
	Frequency response:	40 Hz ÷ 16000 Hz (± 1 dB)
	Distortion:	= 0.3%
	Input connection:	Screw terminals
	Output:	0 dBu with settled black-white cable (10 cm) with section 2 x 0.25 mm <sup>2</sup>
	Mounting:	Double-coated, open-cell urethane foam tape, thickness 3.2 mm
Compatilbe models:	VSA 850, VSA 1250, VSA 2050	
<hr/>		
<b>Standard compliance</b>	Safety agency:	CE compliant
<hr/>		
<b>Size</b>	Weight:	0.05 kg / 0.11 lbs
<hr/>		
<b>Shipping information</b>	Package Height:	75 mm / 2.95 inches
	Package Width:	140 mm / 5.51 inches
	Package Depth:	70 mm / 2.76 inches
	Package Weight:	0.8 kg / 1.76 lbs

**PART NUMBER**

- **13360318**

TA1000 VSA

EAN 8024530012878