



TT 22-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER



Description

TT22-A II is a 2-way active system featuring a 12" neodymium woofer, 86 mm voice coil in a bass reflex configuration and a 1.4" exit, 75 mm voice coil neo compression driver. An extremely careful acoustic design plus the highest quality transducers and a powerful amplifier make the TT22-A II speaker system the perfect solution from live sound situations to playback and monitoring. The amplifier section features 1100 watt power – 800 watt low frequency, 300 watt high frequency. The cabinet is made of marine Baltic birch plywood and features high-resistance polyurea coating. The cabinets has 2 side handles, 6 x fly-track rigging points, quick lock pin receptacles and a steel pole mount.

Features

- > 1100 W Class D Amplifier
- > 90 x 60 constant directivity coverage angle
- > 12" neo woofer, 3.5" mm voice coil
- > 1.5 " neo c. driver, 3.0" mm voice coil
- > DSP Processing
- > Onboard RDNet Control
- > Multifunctional cabinet
- > Very high output

Part Number

13000444 TT 22-A II
13000445 TT 22-A II

220-240 V
115 V

Black
Black


EAN 8024530012991
EAN 8024530013219



TT 22-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Line Art 2D

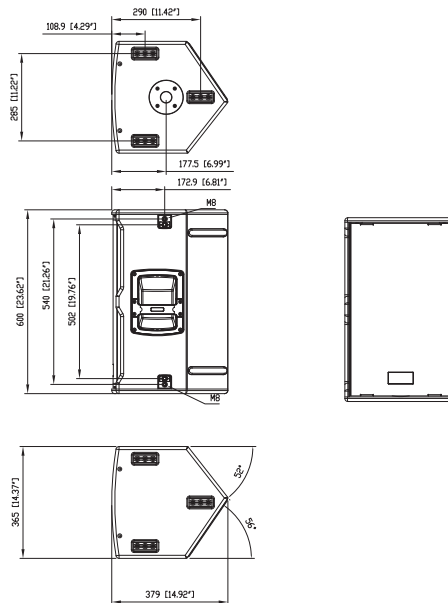

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz ÷ 20000 Hz
	Max SPL @ 1m	131 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.5" neo, 3.0" v.c
	Woofer	1 x 12" neo, 3.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	800 Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	proces., 8 sel. presets
	RDNet	Onboard
Power section	Total Power	2200 W Peak, 1100 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1600 W Peak, 800 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	6 x fly tracks, quick lock, pole mount
	Handles	2 on side
	Grille	Steel
	Color	Black
Size / Weight	Height	600 mm / 23.62 inches
	Width	365 mm / 14.37 inches
	Depth	379 mm / 14.92 inches
	Weight	22.6 kg / 49.82 lbs



TT 22-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Rigging / Mounting

ACCESSORIES

FLOOR STANDS

13360109 AC PRO-FS Black EAN 8024530006471

POLE MOUNT KITS

13360232 AC PMX EAN 8024530010058

13360110 AC PRO-PM Black EAN 8024530006488

13360067 PM-KIT M20 Black EAN 8024530014599

VERTICAL BRACKETS

13360704 VBR60704 Black EAN 8024530023096

Protections

COVERS

13360325 CVR TT 22 II Black EAN 8024530013424

Cables

CABLES

12399019 CBL ETHERCON TO XLR F 0.2M Black EAN 8024530013882

12399020 CBL ETHERCON TO XLR M 0.2M Black EAN 8024530013899

CABLES KIT

13360102 AC XLR 3M3F EAN 8024530006402

12399016 CBL ETHERCON 0.7M Black EAN 8024530013844

12399017 CBL ETHERCON 1.5M Black EAN 8024530013851

12399035 CBL ETHERCON 3M Black EAN 8024530013868

12399018 CBL ETHERCON 5M Black EAN 8024530013875