



## TECHNICAL SPECIFICATIONS

### System specifications

Number of zones managed:	124
Spare amplifier automatic change-over:	Yes
Max number of consoles:	32
Number of console buses:	2
Number of simultaneous emergency audio channels:	4
Number of digital audio channels:	4
Max number of units connectable:	32
Communication bus:	RCF bus
Connection Cables:	FTP CAT 5, FTP CAT 6, J-Type fire-rated
Integrated pre-recorded emergency messages:	Yes
Integrated pre-recorded routine messages:	Yes
Message scheduler:	Yes
Remote monitoring:	Yes

### Input section

Total number of inputs:	8
Balanced:	5
Unbalanced:	3
Mono:	8
Line inputs:	4
Line connectors:	Euroblock, RCA
Mic+Line inputs:	1
Mic+Line connectors:	Euroblock
Mic+Line Phantom:	24 V DC
VOX:	Yes
Paging inputs:	2
Paging connectors:	RJ45
Paging command:	Serial
Paging emergency:	Yes
Digital inputs:	1
Digital connectors:	RJ45
Digital type:	DANTE
General Purpose Inputs (GPI):	12
Programmable GPI:	Yes
Monitored GPI:	8
Photo-coupled GPI:	4

### Output section

Signal output number:	5
Signal output connectors:	JACK, RCA, RJ45
General Purpose Outputs (GPO):	8
Programmable GPO:	Yes
Monitored GPO:	8

<b>Processing</b>	DSP:	Yes
	EQ Filters:	Yes
	Compressors:	Yes
	Tone controls:	Yes
	High-pass filter:	200 Hz
	Automatic Gain Control (ACG):	Yes
<b>Controls</b>	Configuration:	Front panel, PC Software
	Number of programs/presets:	64
	Priority:	Yes
	Music on hold:	Yes
	Chime tone:	Yes
<b>Protections</b>	Cooling:	Convection/Forced
	Short circuit:	Yes
	Thermal:	Yes
	DC:	Yes
	Fuses:	Yes
	VHF (Very High Frequencies):	Yes
<b>Audio sources</b>	USB pen drives:	Yes
	SD card:	Yes
<b>Power requirement</b>	Operating voltage:	220-240/115 V- 50/60Hz
	Voltage selection:	Internal
	DC power:	Yes
	DC power value:	48 V
	Max current AC 230V:	1
	Max current DC:	2
	Power consumption:	60 W
<b>Standard compliance</b>	EN54-16 certified:	Yes
	CE compliance:	Yes
	CPR number:	0068-CPR-002/2014
<b>Physical specifications</b>	Cabinet/Case Material:	Metal
	Rack mounting:	19", 2U
<b>Size</b>	Height:	88 mm / 3.46 inches
	Width:	482 mm / 18.98 inches
	Depth:	350 mm / 13.78 inches
	Weight:	6.98 kg / 15.39 lbs
<b>Shipping informations</b>	Package Height:	204 mm / 8.03 inches
	Package Width:	549 mm / 21.61 inches
	Package Depth:	474 mm / 18.66 inches
	Package Weight:	8.72 kg / 19.22 lbs




**PART NUMBER**

- **17170185**

MU 9186R


EAN 8024530013172

**DRAWINGS**

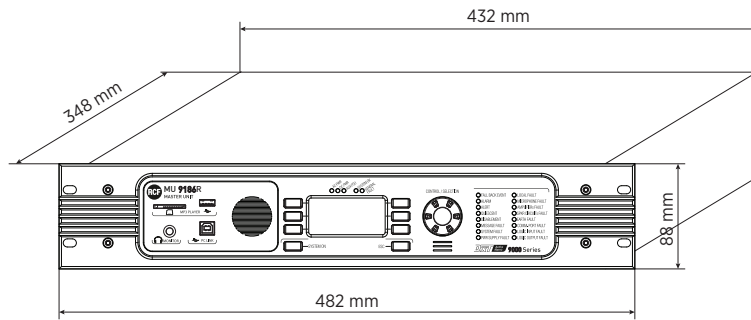


**PANELS**

Front panel

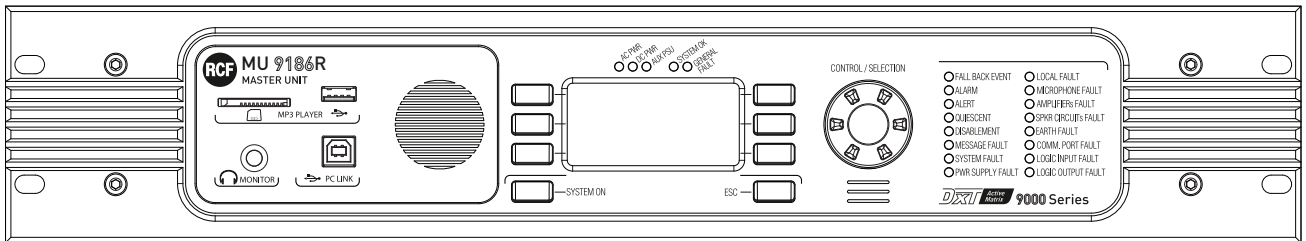

Rear panel

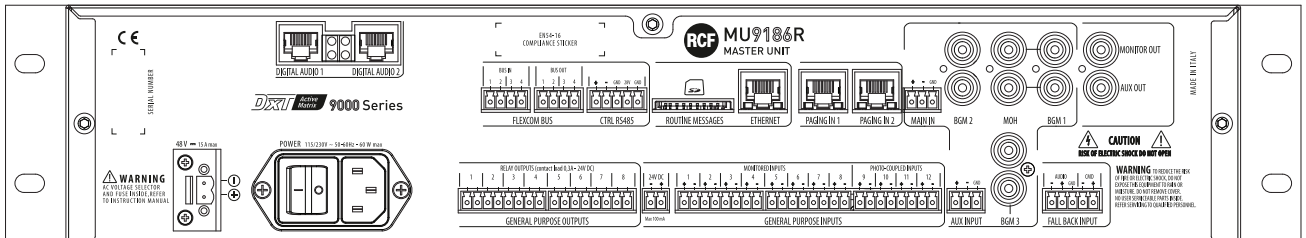

**ACCESSORIES**



CJ 428CAT CABLE FTP 4x2x22 AWG CAT 5E FR  
(PH120)

PART NUMBER **12399047**  
EAN: 8024530016449

---