



TT 25-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER



Description

The TT25-A II is the most flexible and powerful tool in its class. TT25-A II offers very high output and dynamics, and extreme linearity and accuracy in a compact size. TT25-A II is a 2-way active system featuring a 15" neo woofer, 86 mm voice coil in a bass reflex configuration; 1.5" exit, 100 mm voice coil neo compression driver; 90° x 60° constant directivity horn, 90° rotating. The TT25-A II is the ideal professional speaker for sound reinforcement, live performances and events.

Features

- > 1100 W Class D Amplifier
- > 90 x 60 constant directivity coverage angle
- > 15" neo woofer, 3.5" voice coil
- > 1.5 " neo c. driver, 4.0" voice coil
- > DSP Processing
- > Onboard RDNet Control
- > Multifunctional cabinet
- > Very high output

Part Number

13000446 TT 25-A II
13000447 TT 25-A II

220-240 V
115 V

Black
Black


EAN 8024530012984
EAN 8024530013226



TT 25-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Line Art 2D

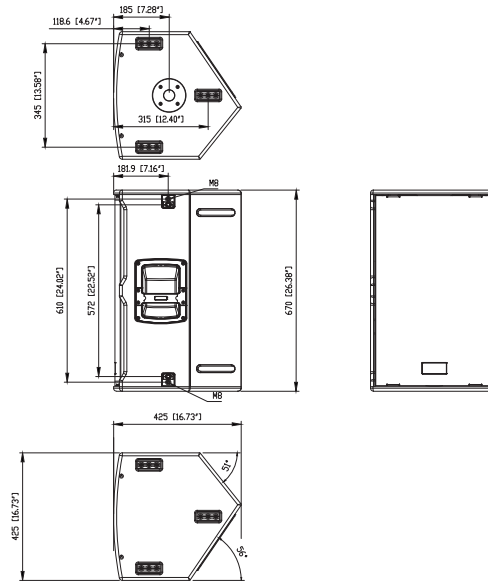

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz ÷ 20000 Hz
	Max SPL @ 1m	134 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	60°
Transducers	Compression Driver	1 x 1.5" neo, 4.0" v.c
	Woofer	1 x 15" neo, 3.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	750 Hz
	Protections	Thermal, HF
	Limiter	Fast Limiter
	Controls	Proces., 8 sel. presets
	RDNet	Onboard
Power section	Total Power	2200 W Peak, 1100 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1600 W Peak, 800 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	6x fly track, quick lock, pole mount
	Handles	2 on side
	Grille	Steel
	Color	Black
Size / Weight	Height	670 mm / 26.38 inches
	Width	425 mm / 16.73 inches
	Depth	425 mm / 16.73 inches
	Weight	26 kg / 57.32 lbs



TT 25-A II

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Rigging / Mounting

ACCESSORIES

FLOOR STANDS

13360109 AC PRO-FS Black EAN 8024530006471

POLE MOUNT KITS

13360232 AC PMX EAN 8024530010058

13360110 AC PRO-PM Black EAN 8024530006488

13360067 PM-KIT M20 Black EAN 8024530014599

VERTICAL BRACKETS

13360329 V-BR TT 25 II Black EAN 8024530013349

Protections

COVERS

13360326 CVR TT 25 II Black EAN 8024530013431

Cables

CABLES

12399019 CBL ETHERCON TO XLR F 0.2M Black EAN 8024530013882

12399020 CBL ETHERCON TO XLR M 0.2M Black EAN 8024530013899

CABLES KIT

13360102 AC XLR 3M3F EAN 8024530006402

12399016 CBL ETHERCON 0.7M Black EAN 8024530013844

12399017 CBL ETHERCON 1.5M Black EAN 8024530013851

12399035 CBL ETHERCON 3M Black EAN 8024530013868

12399018 CBL ETHERCON 5M Black EAN 8024530013875