

HS 1026

SPOTLIGHT CEILING SPEAKER

DESCRIPTION

The HS Series are fullrange speakers that can be flush-mounted in false ceilings like normal halogen spots used in lighting systems. Quick and easy installation in false ceilings of varying thickness thanks to the adaptable spring hooks and the standard size of the mounting hole.



FEATURES

- For paging and background music
- Music power / RMS: 24 / 6 W
- 2.5" extended range loudspeaker
- High-pass filter for use with optional subwoofer
- Low impedance (8Ω) or 100V
- Built-in multi-tapped transformer for 100/70V constant voltage connection
- Ease of installation in standard holes used for lightspots

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB):	220 Hz ÷ 17000 Hz
	Max SPL @ 1m:	102 dB
	Coverage angle:	180°
	System Sensitivity:	89 dB
Power section	Nominal Impedance (ohm):	8 ohm
	Power Handling:	6 W RMS
	Peak Power Handling:	24 W PEAK
	Recommended Amplifier:	12 W
Transducers	Fullrange:	3.5"
Input/Output section	Input connectors:	Screw Terminals
	Output connectors:	Screw Terminals
	Constant Voltage Transformer:	70/100 V
	Power selection 1:	6 W - 1667 ohm
	Power selection 2:	3 W - 3333 ohm
	Power selection 3:	1.5 W - 6667 ohm
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Plastic
	Hardware:	Metal clamps
	Grille:	Steel
	Color:	White
Size	Depth:	91 mm / 3.58 inches
	Recessed Depth:	85 mm / 3.35 inches
	Diameter:	104 mm / 4.09 inches
	Cut out diameter:	92 mm / 3.62 inches
	Weight:	0.08 kg / 0.18 lbs
Shipping informations	Package Height:	130 mm / 5.12 inches
	Package Width:	130 mm / 5.12 inches
	Package Depth:	110 mm / 4.33 inches
	Package Weight:	0.69 kg / 1.52 lbs



PART NUMBER







- **13110062**

HS 1026 W







EAN 8024530010096

DRAWINGS

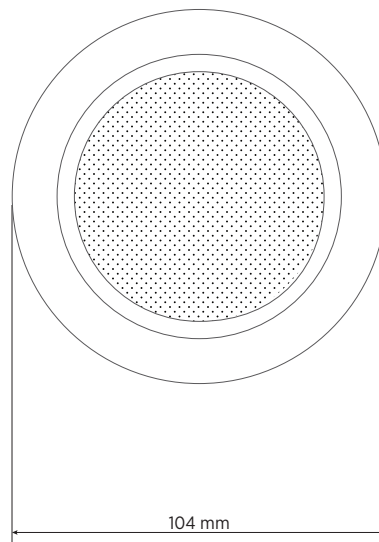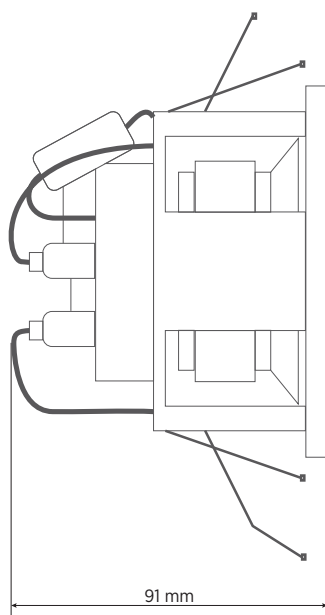

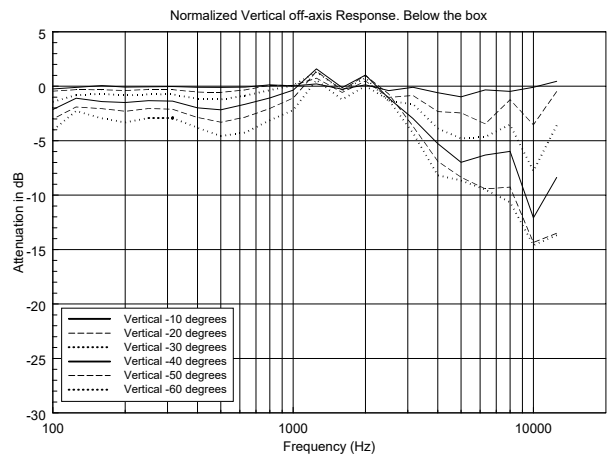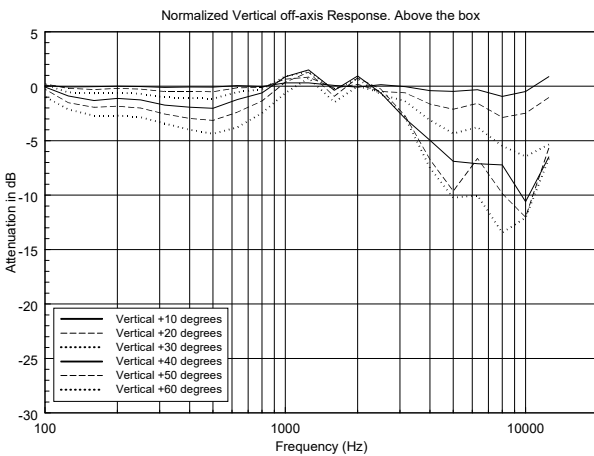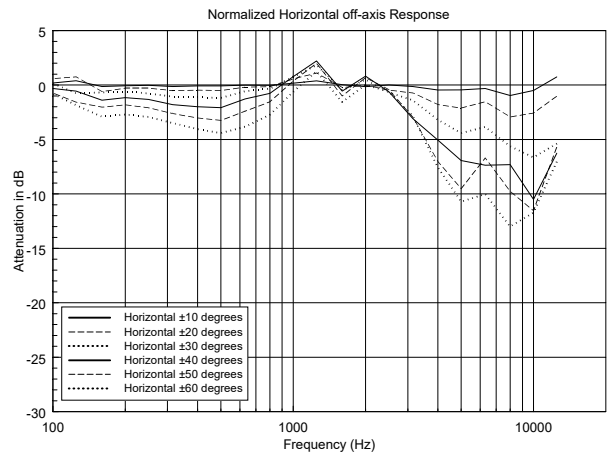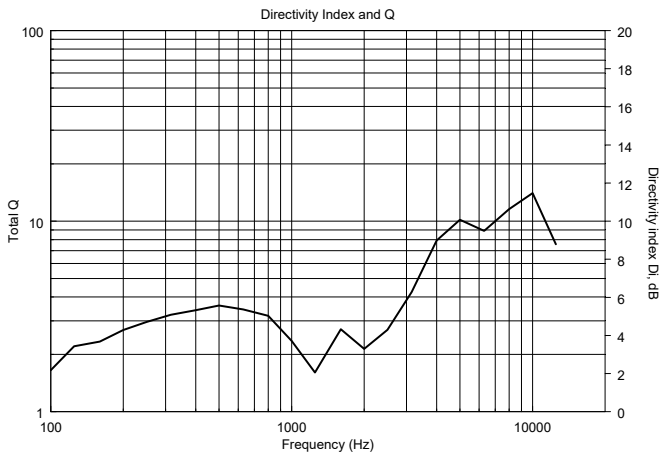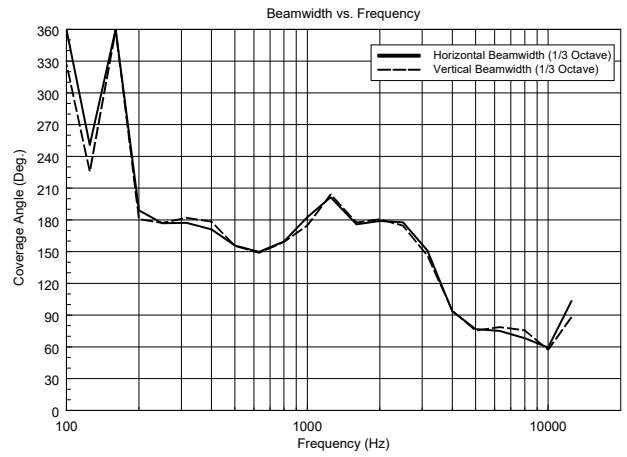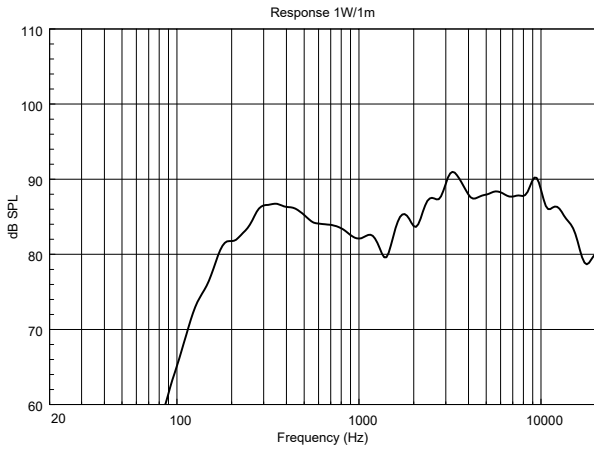

HORIZONTAL 1/3 POLAR PLOT

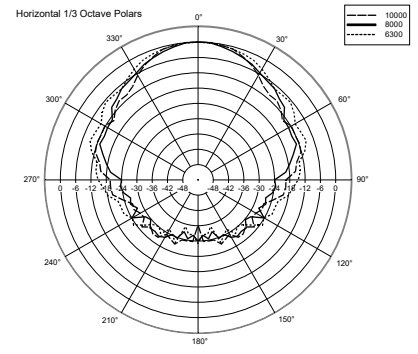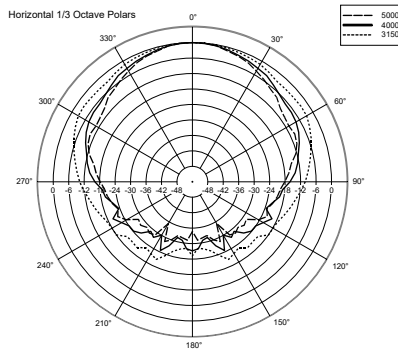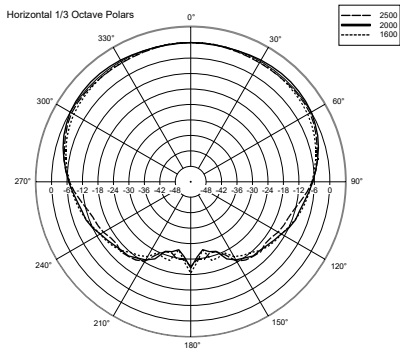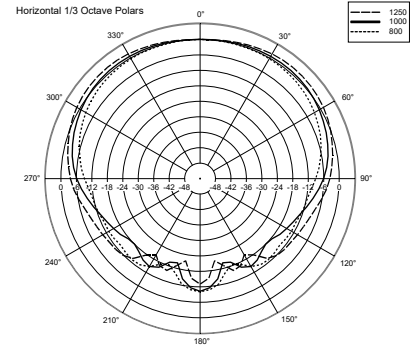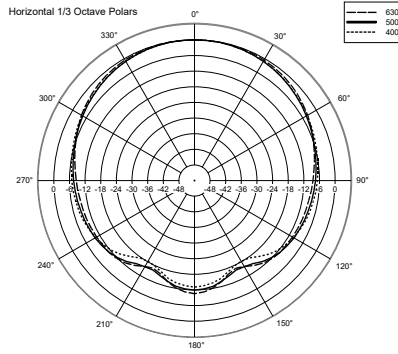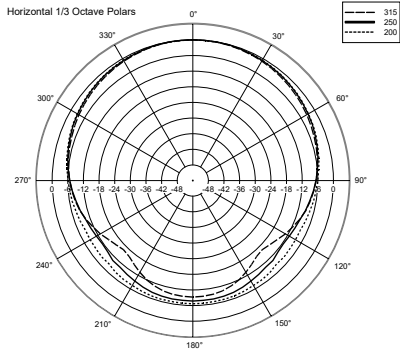

VERTICAL 1/3 POLAR PLOT

