


TD 60

60 W UNIVERSAL LINE TRANSFORMER

DESCRIPTION

These transformers make it possible to connect loudspeakers (4 - 8 Ω impedance) to constant voltage lines (70 - 100 V). It is possible to choose the power applied to loudspeakers, as these transformers have outputs with different transformation ratios.

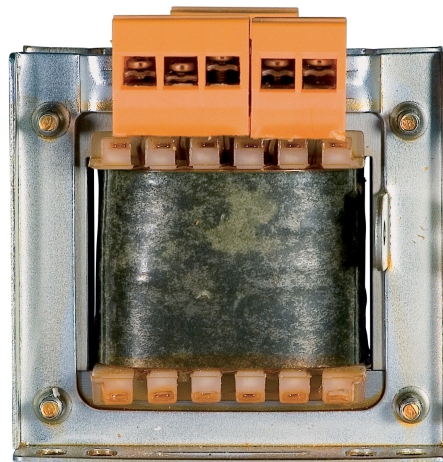

FEATURES

- High quality transformers suitable to connect loudspeakers with 4-8 Ω impedance (TD 105 excluded) to constant voltage lines (70-100V). It's possible to select different power values choosing different outputs
- Thanks to material over-sizing and alternate layer windings, they offer high performance: dynamics and frequency response are particularly extended. They are suitable to drive professional speakers through constant voltage power amplifiers (TD 105 excluded)
- It's possible to select different power values choosing different outputs
- They are suitable to drive professional speakers through constant voltage power amplifiers (TD 105 excluded)

TECHNICAL SPECIFICATIONS

General specifications	Frequency response:	50 Hz - 18.000 Hz (- 3 db)
	Nominal power:	60 W
	Input voltage:	100 V - 70 V
	Output power (4 Ohm):	60 W - 30 W - 15 W
	Output power (8 Ohm):	60 W - 30 W - 15 W - 7,5
	Wire maximum section:	2,5 mm ²

Standard compliance	CE marking:	Yes
----------------------------	-------------	-----

Size	Height:	77 mm / 3.03 inches
	Width:	77 mm / 3.03 inches
	Depth:	79 mm / 3.11 inches
	Weight:	1.19 kg / 2.62 lbs

Shipping informations	Package Height:	120 mm / 4.72 inches
	Package Width:	135 mm / 5.31 inches
	Package Depth:	125 mm / 4.92 inches
	Package Weight:	1.29 kg / 2.84 lbs

PART NUMBER

- **13360047**

TD 60

EAN 8024530005405