



P 8015S

WEATHERPROOF SUBWOOFER



Description

P 8015S is a weatherproof bass reflex subwoofer equipped with a 15" low-frequency neodymium transducer with a 4" voice coil offering power and efficiency for a variety of professional outdoor or indoor applications. The P 8015S has been specifically designed to reinforce the low-frequency range in P Series speakers array systems. The single-piece roto-molded cabinet is fully UV protected and meets IP-55 standard requirements (International Protection Rating), equipped with M10 brass inserts (12x) and a durable and corrosion-resistant stainless steel U-Bracket and spacers (2x) for 90° mounting. The aluminum grille cover is powder coated with a water-repellent fabric backing.

Features

- › 800 W RMS power handling
- › 132 dB max SPL
- › 50 Hz ÷ 200 Hz frequency range
- › 15" neodymium woofer, 4.0" v.c.
- › Weatherproof IP55 cabinet with UV protection
- › Aluminum grille
- › AISI 316L stainless steel bracket
- › 12 suspension points (M10)

Part Number

13000230 P 8015S


Black

EAN 8024530008819




P 8015S

WEATHERPROOF SUBWOOFER

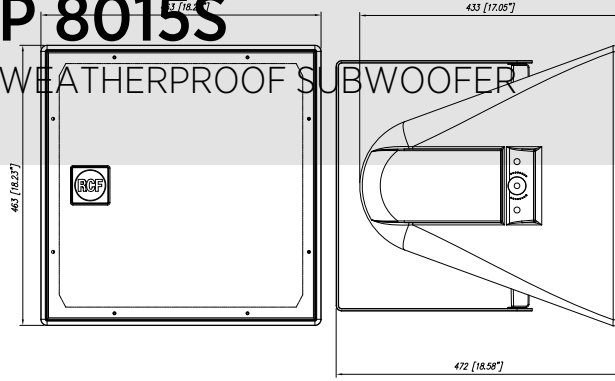

P3115
P6215
P8015



Line Art 2D

Acoustical specifications

Frequency Response (-10dB) 50 Hz ÷ 200 Hz
Max SPL @ 1m 132 dB
System Sensitivity 97 dB

Power section

Amplification Full Range
Nominal Impedance 8 ohm
Power Handling 800 W
Peak Power Handling 3200 W PEAK

Transducers

Woofers 15" neo, 4.0" v.c

Input/Output section

Input connectors Neoprene Cable

Standard compliance

IP protection grade IP 55
Safety agency CE compliant

Physical specifications

Cabinet/Case Material PE Low Density
Hardware 12 x M10 + U bracket and pair of spacers
Grille Aluminum with waterproof clothing
Color Black

Size

Height 463 mm / 18.23 inches
Width 463 mm / 18.23 inches
Depth 433 mm / 17.05 inches
Weight 16.5 kg / 36.38 lbs

ACCESSORIES

Rigging / Mounting

CLUSTER BRACKETS
13360094 C-BR 2X P15 Black EAN 8024530006105