TT 45-CXA

ACTIVE HIGH-OUTPUT STAGE MONITOR

Description

The TT45-CXA is a full range, high performance symmetrical monitor. The linear curve response, the consistent coverage and acoustic output make the TT45-CXA the professional choice for medium and large stages. The voicing is accurate and deep, the sound transparent in the mids and extremely accurate at very high frequencies.
The size is compact and the profile low for a discrete appearance. The TT45-CXA is a full range, high power active system that sets a new standard in the touring and theatre sound reinforcement. By producing flat amplitude and phase response, fullrange bandwidth and exceptional impulse response, the TT45-CXA far exceeds the capabilities of conventional stage monitors.

Features

› 2200 Watt, three-way class D amplifier
› 50° x 90° constant directivity coverage
› 2 x 10'' neodymium woofers, 3.0'' voice coil
› Horn loaded 1.4'' neo compression driver, 4.0'' v.c.
› Symmetrical design
› Multifunctional cabinet
› DSP processing
› Onboard RDNet control

Part Number

13000506 TT 45-CXA	220-240 V	Black	EAN 8024530014131
13000507 TT 45-CXA	115 V	Black	EAN 8024530014186

Products are continually improved. All specifications are therefore subject to change without notice.

TT 45-CXA

ACTIVE HIGH-OUTPUT STAGE MONITOR

Line Art 2D

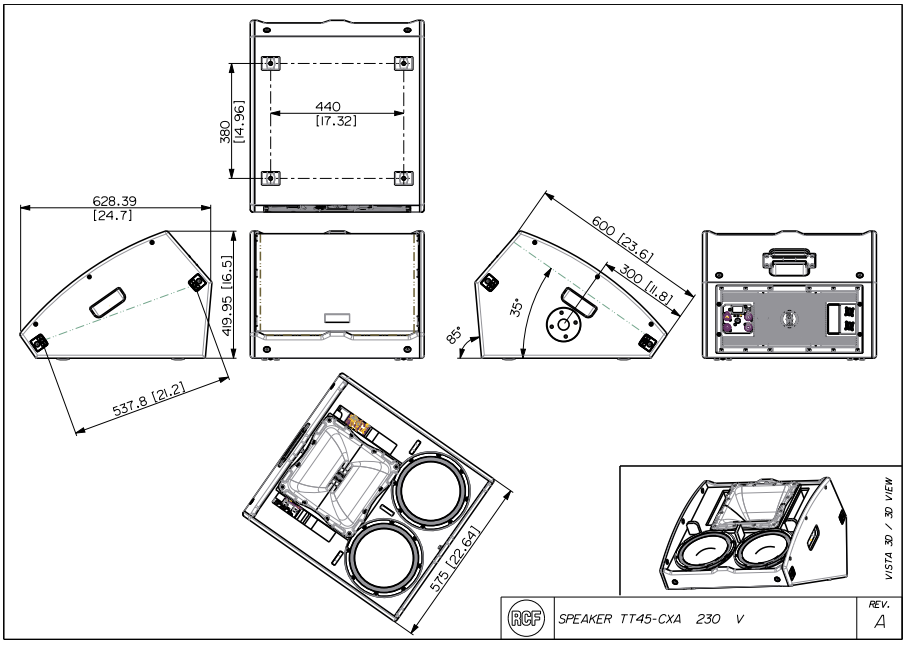

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	45 Hz - 20000 Hz
	Max SPL @ 1m	136 dB
	Horizontal coverage angle	50°
	Vertical coverage angle	90°
Transducers	Compression Driver	1 x 1.5'' neo, 4.0'' v.c
	Woofer	2 x 10'' neo, 3.0'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	600 Hz
	Protections	Thermal, RMS
	Limiter	Fast Limiter
	Controls	Gain, EQ, Preset, Phase switch, Output Delay Settings
	RDNet	Onboard
Power section	Total Power	4400 W Peak, 2200 W RMS
	High frequencies	2200 W Peak, 1100 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection/Forced
Standard compliance	Safety agency	CE compliant

TT 45-CXA

ACTIVE HIGH-OUTPUT STAGE MONITOR

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	4xQuicklock
	Handles	2 side, 1 back
	Grille	Steel
	Color	Black
Size / Weight	Height	420 mm / 16.54 inches
	Width	575 mm / 22.64 inches
	Depth	628 mm / 24.72 inches
	Weight	30 kg / 66.14 lbs

ACCESSORIES

-	13360111	AC PRO-LF	Black	EAN 8024530006495
	13360035	AC S260		EAN 8024530005030
Rigging / Mounting	**FLOOR STANDS**			
	13360109	AC PRO-FS	Black	EAN 8024530006471
	POLE MOUNT KITS			
	13360034	AC PMA		EAN 8024530007713
	13360232	AC PMX		EAN 8024530010058
	13360110	AC PRO-PM	Black	EAN 8024530006488
	13360067	PM-KIT M20	Black	EAN 8024530014599
Cables	**CABLES KIT**			
	13360102	AC XLR 3M3F		EAN 8024530006402