

# VSA 2050 II

## DIGITALLY STEERABLE COLUMN SPEAKER

### DESCRIPTION

The VSA 2050 II is a multi-amplified vertical steerable array that represents one of the latest RCF applications in terms of digital audio technology. Thanks to powerful DSPs it processes the audio signal sent to each speaker for controlling its vertical acoustic dispersion to address the audio signal exactly to the listening area, avoiding to send the acoustic energy to ceilings and empty floors, thus not introducing bad reflections that would affect speech intelligibility, mainly in critical environments with high reverberation time. Full RDNet compatibility.



### FEATURES

- 20 x Class D, 50 W amplifiers
- 96 dB Max SPL (@ 30 m)
- 20 x 3.5" full range neo speakers
- 48 kHz 32 bit processing
- Horizontal dispersion 130°
- Vertical Coverage Beam from 10° to 30°
- Vertical Steering from 0° to -40°
- Standard installation accessories included
- Extruded aluminium body
- Indicators and control for EN 60849 monitoring facility

**TECHNICAL SPECIFICATIONS**

<b>Acoustical specifications</b>	Frequency Response:	100 Hz ÷ 18000 Hz
	Max SPL @ 30m:	96 dB
	Horizontal coverage angle:	130°
	Vertical coverage angle:	30°
<b>Transducers</b>	Fullrange:	20 x 3.5" neo, 1.0" v.c
<b>Input/Output section</b>	Input signal:	bal/unbal
	Input connectors:	Ceramic screw terminals
	Input sensitivity:	0 dBu
<b>Processor section</b>	Protections:	Thermal, short circuit
	Limiter:	Soft Limiter
	RNet:	Yes
<b>Power section</b>	Total Power:	1300 W Peak, 650 W RMS
	Cooling:	Convection
	Connections:	VDE
<b>Standard compliance</b>	CE marking:	Yes
<b>Physical specifications</b>	Cabinet/Case Material:	Aluminium
	Hardware:	2 x wall mounting flange
	Color:	White - RAL 9003, Black - RAL 9005, Custom color
<b>Size</b>	Height:	2070 mm / 81.5 inches
	Width:	125 mm / 4.92 inches
	Depth:	97 mm / 3.82 inches
	Weight:	20 kg / 44.09 lbs
<b>Shipping informations</b>	Package Height:	180 mm / 7.09 inches
	Package Width:	2264 mm / 89.13 inches
	Package Depth:	200 mm / 7.87 inches
	Package Weight:	31.5 kg / 69.45 lbs



**PART NUMBER**

• **13100054**

VSA 2050 II B  
115V, Black - RAL 9005  
EAN 8024530018115

• **13100024**

VSA 2050 II  
220-240V, Custom color  
EAN 8024530016012

• **13100053**

VSA 2050 II B  
220-240V, Black - RAL 9005  
EAN 8024530018108

• **13100023**

VSA 2050 II  
115V, White - RAL 9003  
EAN 8024530016005

• **13100031**

VSA 2050 II  
115V, Custom color  
EAN 8024530016081

• **13100022**

VSA 2050 II  
220-240V, White - RAL  
9003  
EAN 8024530015992



**DRAWINGS**

**FRONT VIEW**

**SIDE VIEW**

**REAR VIEW**

**VSA 2050 II**

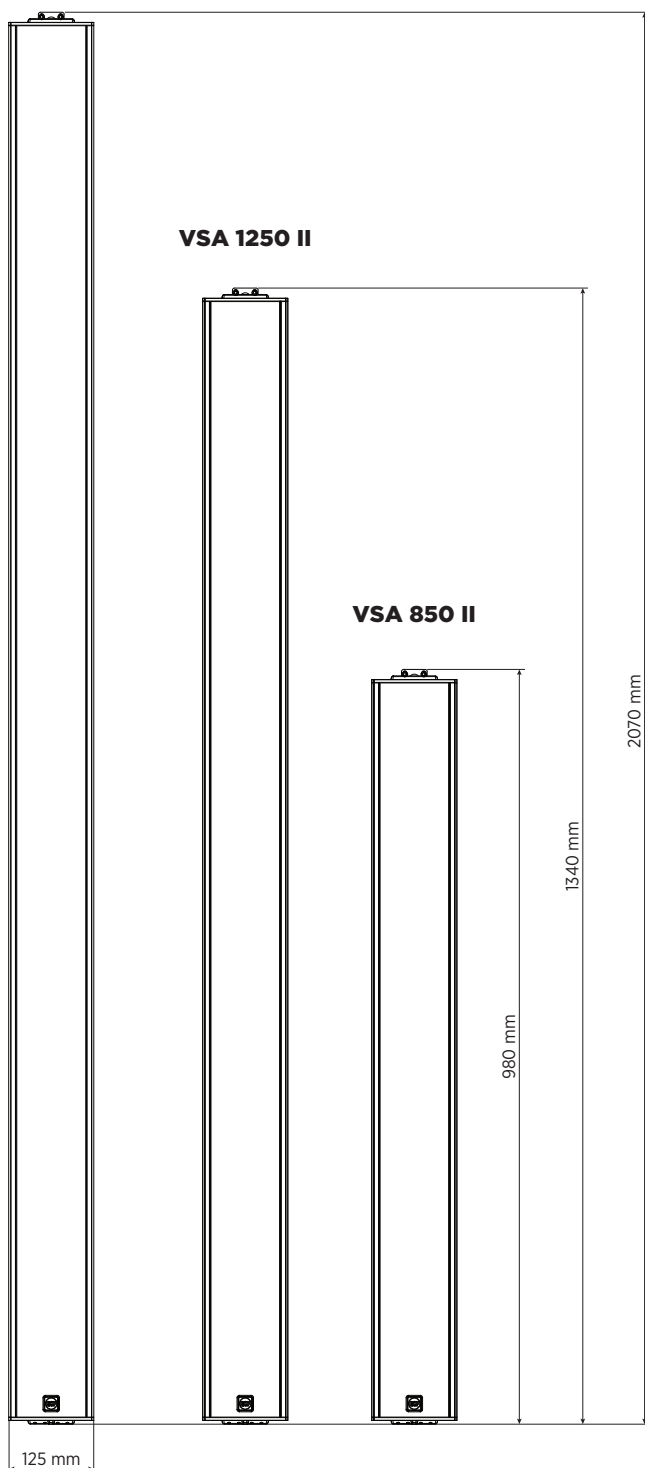

97 mm  
104 mm Including bracket

**ACCESSORIES**

SWIVEL BRACKET SWM-BR VSA II

PART NUMBER **13360410**  
EAN: 8024530016111

SWIVEL BRACKET SWM-BR VSA II BLACK

PART NUMBER **13360442**  
EAN:

VSA REMOTE CONTROL

PART NUMBER **13360330**  
EAN: 8024530013110

VSA TA 1000 - TRANSF. ADAPT. 100V TO ODB

PART NUMBER **13360318**  
EAN: 8024530012878