TT 2-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Description

The TT2-A is the most flexible and powerful tool in its class. The incredible output and dynamics, the extreme linearity and fidelity makes the TT2-A a special product in its category. The TT2-A is the ideal compact two-way speaker for near field sound reinforcement, live sound and corporate events. The integration of the 1600 Watt, two channel, digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency. The speaker is equipped with a complete set of integrated rigging mechanics for rental or installation. Dedicated accessories to create clusters are available.

Features

- 1600 Watt, 2 way amplification
- 12" neo woofer, 4" v.c.
- 1.4" titanium dome neo compression driver, 3.0" v.c.
- 90° x 50° precision waveguide
- 96 Khz, 32 bit DSP processing
- Maximum output, perfect audio fidelity
- Tour grade cabinet and mechanics
- RDNet Ready

Part Number

13000378 TT 2-A	220-240 V	Black	EAN 8024530010454
13000382 TT 2-A	115 V	Black	EAN 8024530010485

TT 2-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

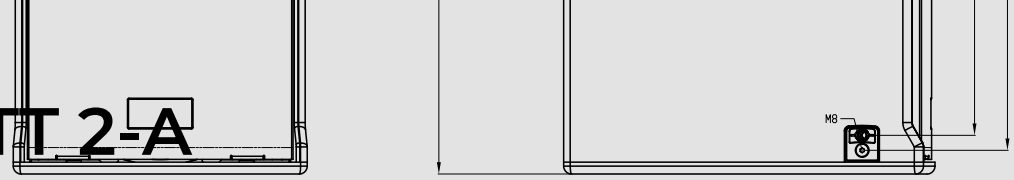

Line Art 2D

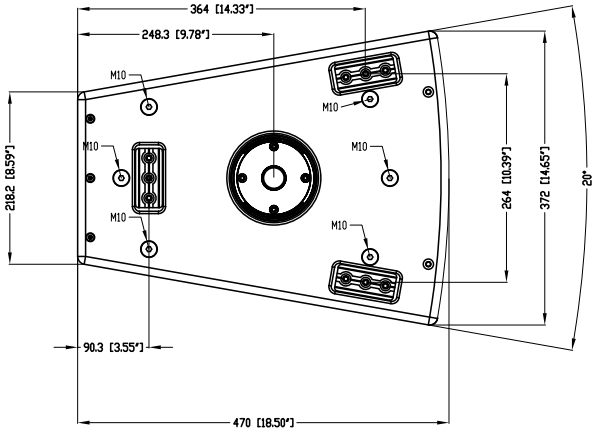

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	134 dB
	Horizontal coverage angle	90°
	Vertical coverage angle	50°
Transducers	Compression Driver	1 x 1.4'' neo, 3.0'' v.c
	Woofer	1 x 12'' neo, 4.0'' v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR
	Output connectors	XLR
	Input sensitivity	+4 dBu
Processor section	Crossover Frequencies	750 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Gain reduction, RDNet local setup/bypass, Time Delay, Presets (Linear, Close, Far listening, High-pass), RDNet Ready
	RDNet	Ready
Power section	Total Power	3200 W Peak, 1600 W RMS
	High frequencies	1000 W Peak, 500 W RMS
	Low frequencies	2200 W Peak, 1100 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant

TT 2-A

ACTIVE HIGH OUTPUT TWO-WAY SPEAKER

Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	Installation/Rental fittings
	Handles	2 side
	Grille	Steel
	Color	Black
Size / Weight	Height	643 mm / 25.31 inches
	Width	372 mm / 14.65 inches
	Depth	470 mm / 18.5 inches
	Weight	34.4 kg / 75.84 lbs

ACCESSORIES

-	13360111	AC PRO-LF	Black	EAN 8024530006495
	13360035	AC S260		EAN 8024530005030
Rigging / Mounting	**END BRACKETS**			
	13360262	END-PLATE TT 2 2X	Black	EAN 8024530018573
	FLOOR STANDS			
	13360109	AC PRO-FS	Black	EAN 8024530006471
	FLYING BRACKETS			
	13360030	AC DS 4X		EAN 8024530020231
	13360031	AC EB 4X		EAN 8024530018870
	HORIZONTAL BRACKETS			
	13360259	H-BR TT 2	Black	EAN 8024530016531
	INSTALLATION PLATES			
	13360261	PLATE TT 2 2X	Black	EAN 8024530018559
	POLE MOUNT KITS			
	13360034	AC PMA		EAN 8024530007713
	13360232	AC PMX		EAN 8024530010058
	13360110	AC PRO-PM	Black	EAN 8024530006488
	13360067	PM-KIT M20	Black	EAN 8024530014599
	VERTICAL BRACKETS			
	13360260	V-BR TT 2	Black	EAN 8024530016869
Protections	**COVERS**			
	13360245	CVR TT 2	Black	EAN 8024530013806
Upgrade Kits	**CONNECTION PANELS**			
	13360176	RDNET IN-OUT PLUG		EAN 8024530015060
Cables	**CABLES KIT**			
	13360102	AC XLR 3M3F		EAN 8024530006402